

GumNaaM_Helpers



Mega File for FinaL TerM

All Files in ONE FILE

(Handouts_waqar_moaz_junaid_vu toper_orange monkey)

الحمدللہ گمنام ہیلپرز ان تمام کتابوں میں مدد کرتے ہیں جن کے لنکس نیچے دیئے گئے ہیں
لیٰذا ہم سے صرف انہی کتابوں کی مدد کا سوال کیا جائے جن کے لنکس نیچے موجود ہیں

Groups Join Krty hi Description Read krna na bhoolyn

جزاک اللہ خیرا و احسن الجزاء

GumNaaM_Helpers All What's App Group Links

Cs101 https://chat.whatsapp.com/KCQ3jK6FcoYEvDYTF1gnBS
Cs201 https://chat.whatsapp.com/DrYV1FAXmppImVZFwI6V2R
Cs301 https://chat.whatsapp.com/EPLvHztf8EB7aH8e1AtidV
Cs302 https://chat.whatsapp.com/BaYfW0P67vNIsl2n36otZM
Cs304 https://chat.whatsapp.com/C0mk0wdo0BU46dlhcd67IO
Cs401 https://chat.whatsapp.com/Jz9WDdHX84lKgkrMPAV0Mf
Cs402 https://chat.whatsapp.com/DW9AZLb4i1P9la4XmcCsRz
Cs403 https://chat.whatsapp.com/HXV25Lc6MnLKZgrA7xOqjF
Cs408 https://chat.whatsapp.com/EFy2mrYJodx5dB5W1jtlI7
Cs411 https://chat.whatsapp.com/IrOaF8Q3tkJKzeVTHapHR9
Cs501 https://chat.whatsapp.com/Eggxx3X0SH2LhOysM57SII
Cs502 https://chat.whatsapp.com/FbLU96Xhmr2FI99fnbz5Yw
Cs504 https://chat.whatsapp.com/Gn7w0UzNCQ2FzRK7ZzY4Io
Cs506 https://chat.whatsapp.com/BL4FFmDKf2S3WIoLsAD2JK
Cs507 https://chat.whatsapp.com/EINDZkV4e4zGLGqL8imozR
Cs508 https://chat.whatsapp.com/HTMAwnJ4Bic2ky8MbT3PuW
Cs601 https://chat.whatsapp.com/KYoaAutdXRlDNS0Mm5XfzP
Cs602 https://chat.whatsapp.com/FpJkLAFNQpZHRyi6vhl5n8
Cs604 https://chat.whatsapp.com/KjDhHjxawtU43Veo9Eawa4
Cs605 https://chat.whatsapp.com/BoF34LtMlYK1l4nQaEO2Ce
Cs610 https://chat.whatsapp.com/FcNcztKyYfd9szsJEJino2
Cs615 https://chat.whatsapp.com/HLVjBNcorFN9bwZhGEkFl3
Cs619 https://chat.whatsapp.com/FEklYr700uj0ihxqnk55A6

Eng101 https://chat.whatsapp.com/Cwp4Ag9TG6ZKxyRqThqM6S
Eng201 https://chat.whatsapp.com/EvvxcPtmrM22VTZhz5NCTw
Eco401 https://chat.whatsapp.com/K3NLvyue6BdK0sVMqDFoU2
Mcm301 https://chat.whatsapp.com/GUyzfdHzu8r43TW16vhZWF
Mgt101 https://chat.whatsapp.com/BmrYaQYuIBOKguHOiT6t2Y
Mgt201 https://chat.whatsapp.com/DZwztlUyxV50D6AshnvWCD
Mgt211 https://chat.whatsapp.com/EmX9xloZnbI12pX9m2DZwa
Mgt301 https://chat.whatsapp.com/G62QTipycoXFrpOZxfDIBK
Mgt501 https://chat.whatsapp.com/H0dTUINbesw0GS4LLSt0W4
Mgt502 https://chat.whatsapp.com/L3GSMFgwDl7DAsu9r0vAxl
Mgt503 https://chat.whatsapp.com/G7BNxqyLYwP48jfPTofkbJ
Mgt602 https://chat.whatsapp.com/HXRpOrEL18vD7lb91nLHTB
Mgt610 https://chat.whatsapp.com/BxMcR1ouiao0wuqLlLj5dB
Mth101 https://chat.whatsapp.com/LHsbl65FbwGH2SNFF9ipSb
Mth202 https://chat.whatsapp.com/GevRebusRaxFh6dgnzRJuM
Mth301 https://chat.whatsapp.com/EFm472nc2woDPrOEqnY1lj
Mth401 https://chat.whatsapp.com/EP7tlcc17TzLtNaOgD4AcA
Mth501 https://chat.whatsapp.com/Dy7XUVFqqD5LLw4i5X4Xzi
Mth601 https://chat.whatsapp.com/BoD3akuXGK25MFB4UEZcRr
isL201 https://chat.whatsapp.com/BtoqaMbbELW99MLLtQMGwC
Pak301 https://chat.whatsapp.com/KuR9Y7YWeA32enRwKeZJaR
Phy101 https://chat.whatsapp.com/GjC6e47vF1zHwRs5iOc13J
Phy301 https://chat.whatsapp.com/IBrOdznEHDi92fGa76Dqmr
Sta301 https://chat.whatsapp.com/BchodAnjbydKXLuxFfKGxr

...Paid Service Available for LMS Activities...

Only for those students who are so busy in office or work or job that they can't watch their LMS due to their Busyness

FOR MORE INFO. CONTACT US ONLY WHAT'S APP 0302-1400084

Table of Contents

1. Introduction to Computer Science 26
1.1. What is Computer Science? 26
1.2. Computer Science Applications 27
1.3. Local Job Market 27
1.4. International Job Market 28
1.5. Are you not a student of Computer Science? 28
2. Breadth First Learning 29
2.1. Search Engine Usage Techniques 29
2.2. History of Computing 29
2.3. Data Storage 29
2.4. Data Manipulation 29
2.5. Operating System 29
2.6. Networking and the Internet 29
2.7. Algorithms 29
2.8. Programming Languages 29
2.9. Software Engineering 29
2.10. Data Abstraction 29
2.11. Database Systems 30
2.12. Artificial Intelligence 30
2.13. CS impact on society 30
2.14. Content Filtering, Spam, International laws 30
2.15. Word Processing 30
2.16. Presentations Development 30
2.17. Spreadsheet 30
2.18. Database MS Access 30
2.19. Web Page Development 30
Module 3 31
3. Search Engines 31
3.1. Query 31
3.2. How Google Works 31
3.3. Try Searching on Google 32

Copyright Virtual University of Pakistan

3.4. Use of Microphone 32
3.5. Flip a Coin 32
3.6. Query Formulation 32
3.7. Capitalization 32
Module 4 33
4. Searching Tricks 33
4.1. Weather Searching 33
4.2. Performing Calculations on Google 33
4.3. Currency Conversion 34
Module 5 35
5. Search Operators (1) 35
5.1. Search on Social Media 35
5.2. Search for a price 35
5.3. Searching Hash tags 36
5.4. Exclude words from Query 36
5.5. Exact Match 36
5.6. Wild Card based Searching 36
Module 6 37
6. Search Operators (2) 37
6.1. Searching within the range 37
6.2. Boolean Operators 37
6.3. Search with a Specific Site 37
6.4. Searching Related Websites 37
6.5. Searching a cached version 37
Module 7 38
7. Search Operators (3) 38
7.1. Stocks Operator 38
7.2. Map Operator 38
7.3. Movie Operator 38
7.4. Compare Food 38
7.5. Define Operator 38
7.6. Image Search 38
7.7. Tilt 38

Copyright Virtual University of Pakistan

Module 8 39
8. Advanced Search Operators 39
8.1. Intitle 39
8.2. Allintitle 39
8.3. inurl and allinurl 39
8.4. Intext and allintext 39
8.5. Proximity Search 39
8.6. Let's solve a complex Query 39
Module 9 40
9. What we should not search on Internet 40
9.1. Avoiding Ads: 40
9.2. Dangerous to Search 40
9.3. Avoid Cyber-security attacks 40
9.4. Unpleasant Results 41
Module 10 42
10. Roots of Computing 42
10.1. Abacus 42
10.2. Technology of Gears 42
10.3. Punch Cards 43
10.4. ENIAC 44
10.5. Factsheet of ENIAC 44
10.6. Rapid Advancement 44
Module 11 46
11. Bits 46
11.1. Basics 46
11.2. What Bits can represent: 46
11.3. Bits units 46
11.4. Patterns Using Bits 46
Module 12 48
12. Boolean Operations 48
12.1. AND Boolean Operation 48
12.2. OR Boolean Operation 48
12.3. XOR Boolean Operation 48

Copyright Virtual University of Pakistan

12.4. Not Operation 48
12.5. Boolean Operation Example 49
Module 13 50
13. Hexadecimal Notation 50
13.1. Why we need Hexadecimal Notation 50
13.2. Hexadecimal Representation 50
13.3. Hexadecimal Example 50
Module 14 51
14. Storing a Bit 51
14.1. Main Memory 51
14.2. Main Memory Organization 51
14.3. Byte Size Organization 51
14.4. Memory Address 51
14.5. RAM 52
14.6. DRAM 52
14.7. SDRAM 52
Module 15 53
15. Magnetic Systems 53
15.1. Mass Storage 53
15.2. How it works 53
15.3. Zoned-bit recording 53
15.4. Seek Time 53
15.5. Rotation Delay 53
15.6. Access Time 53
15.7. Transfer rate 54
Module 16 55
16. Optical System 55
16.1. Compact Disk 55
16.2. DVD (Digital Versatile Disks) 55
16.3. BDs (Blue Ray Disks) 55
Module 17 55
17. Flash Drives 55
17.1. Issues in Magnetic and Optical Systems 55

Copyright Virtual University of Pakistan

17.2. Flash Drive Technology 56
17.3. SSDs (Solid State Disks) 56
17.4. SDs (Secure Digital Memory Cards) 56
Module 18 57
18. Representing Text 57
18.1. Representation as Code 57
18.2. ASCII Codes 57
18.3. ASCII code example 57
18.4. Limitation of ASCII codes 57
18.5. Limitations of ASCII-extensions 57
18.6. Unicode 57
18.7. UTF-8 57
Module 19 58
19. Representing Numeric Values 58
19.1. Issues in storing numeric as Unicode 58
19.2. Binary Notation 58
19.3. Binary Notation Variations 58
Module 20 59
20. Representing Images 59
20.1. Pixel 59
20.2. Encoding Method: Pixel to Bitmap 59
20.3. Encoding Method: Handling shades 59
20.4. Encoding Method: Colorful Images 59
20.5. Brightness Chrominance 59
20.6. Image Scaling 59
20.7. Geometric Structures for Image Scaling 59
20.8. Scalable Fonts 59
Module 21 60
21. Representing Sound 60
21.1. Sound Amplitude 60
21.2. How to encode the Sound 60
21.3. How Sound data communication takes place 60
21.4. Sample Intervals 60

Copyright Virtual University of Pakistan

21.5. Alternative Method: MIDI 60
Module 22 61
22. Binary Notation 61
22.1. Power Method 61
22.2. Algorithm for Finding Binary Representation of a Positive Decimal Number 61
Module 23 63
23. Binary Addition 63
Module 24 65
24. Fraction in Binary 65
24.1. Radix Point 65
24.2. Example of Radix Point 65
24.3. Addition in fraction 65
Module 25 66
25. 2's Complement Notation to Store Numbers 66
25.1. Integer Representation in 2's Complement 66
25.2. Conversion between positive and negative representations 66
25.3. Addition in 2's complement notation 66
25.4. Problem of Overflow 67
Module 26 68
26. Excess Notation 68
26.1. Integer Representations in Excess Notation 68
26.2. Excess Four Notation 68
26.3. Excess Four Notation Comparisons 68
Module 27 70
27. Floating Point Notation 70
27.1. Storing Radix 70
27.2. Storing Fractions 70
Module 28 71
28. Truncation Errors in Floating Point Notation 71
28.1. Primitive Methods for Handling Truncation Errors 72
28.2. Intelligent Processing for Handling Truncation Errors 72
Module 29 73
29. Data Compression: Generic Techniques 73

Copyright Virtual University of Pakistan

Module 30 75
30. Data Compression: Compressing Images 75
Module 31 77
31. Data Compression: Compressing Audio and Videos 77
Module 32 78
32. Data Manipulation: CPU Basic 78
Module 33 80
33. Data Manipulation: Stored Program 80
Module 34 81
34. Data Manipulation: CPU Architecture Philosophies 81
Module 35 82
35. Data Manipulation: Machine Instruction Categories 82
35.1. Data Transfer Group 82
35.2. Arithmetic/Logic Group 82
35.3. Control Group 82
Module 36 83
36. Data Manipulation: Program Execution 83
Module 37 84
37. Data Manipulation: Program Execution Example 84
Module 38 87
38. Data Manipulation: Logic Operators 87
Module 39 89
39. Data Manipulation: Rotation and Shift 89
Module 40 90
40. Data Manipulation: Arithmetic Operators 90
Module 41 91
41. Data Manipulation: Role of Controller 91
Module 42 92
42. Data Manipulation: Direct Memory Access and Handshaking 92
Module 43 93
43. Data Manipulation: Communication media and communication rates 93
43.1. Parallel Communication 93
43.2. Serial Communication 93

Copyright Virtual University of Pakistan

Module 44 94
44. Data Manipulation: Pipelining 94
Module 45 95
45. Operating Systems: History 95
Module 46 97
46. Operating Systems: Basic Concepts (I) 97
Module 47 98
47. Operating Systems: Basic Concepts (II) 98
Module 48 99
48. Operating Systems: Software Classification 99
Module 49 100
49. Operating Systems: Components (I) 100
Module 50 102
50. Operating Systems: Components (II) 102
51. Operating Systems: Process of Booting 104
Module 52 106
52. Operating Systems: Process and its Administration 106
Module 53 107
53. Operating Systems: Process and its Administration 107
Module 54 109
54. Operating Systems: Handling Competition between Processes 109
Module 55 110
55. Operating Systems: Semaphores 110
Module 56 112
56. Operating Systems: Deadlock 112
Module 57 114
57. Operating Systems: Security Attacks from outside 114
Module 58 115
58. Operating Systems: Security Attacks from inside 115
Module 59 117
59. Networking and the Internet: Network Classification 117
Module 60 118
60. Networking and the Internet: Protocols 118

Copyright Virtual University of Pakistan

Module 61 120
61. Networking and the Internet: Combining Networks 120
Module 62 122
62. Networking and the Internet: Methods of Process Communication 122
Module 63 124
63. Networking and the Internet: Distributed Systems 124
Module 64 125
64. Networking and the Internet: Internet Architecture 125
Module 65 127
65. Networking and the Internet: Internet Addressing 127
Module 66 129
66. Networking and the Internet: Internet Applications 129
Module 67 130
67. Networking and the Internet: Internet Applications: Email 130
Module 68 131
68. Networking and the Internet: VoIP 131
Module 69 132
69. Networking and the Internet: Internet Multimedia Streaming 132
Module 70 133
70. Networking and the Internet: World Wide Web 133
Module 71 134
71. Networking and the Internet: Web implementations 134
Module 72 135
72. Networking and the Internet: HTML 135
Module 73 136
73. Networking and the Internet: HTML 136
Module 74 138
74. Networking and the Internet: More on HTML 138
Module 75 139
75. Networking and the Internet: XML 139
Module 76 141
76. Networking and the Internet: Client Side and Server Side 141
Module 77 143

Copyright Virtual University of Pakistan

77. Networking and the Internet: Layered Approach to Internet Software (I) 143
Module 78 145
78. Networking and the Internet: Layered Approach to Internet Software (II) 145
Module 79 146
79. Networking and the Internet: Layered Approach to Internet Software (III) 146
Module 80 148
80. Networking and the Internet: TCP /IP Protocol Suite 148
Module 81 150
81. Networking and the Internet: Security (Forms of Attacks) 150
Module 82 152
82. Networking and the Internet: Protection and Cures 152
Module 83 154
83. Networking and the Internet: Encryption 154
Module 84 156
84. Networking and the Internet: Legal Approaches to Network Security 156
Module 85 158
85. Algorithm: an Informal Review 158
Module 86 159
86. Algorithm: Formal Definition of Algorithm 159
Module 87 160
87. Algorithm: Abstract Nature of Algorithms 160
Module 88 161
88. Algorithm: Representation (Primitives) 161
Module 89 163
89. Algorithm: Representation (Pseudocode) 163
Module 90 165
90. Algorithm: Representation (Pseudocode) While-Structure 165
Module 91 166
91. Algorithm: Representation (Pseudocode) Function-Structure 166
Module 92 167
92. Algorithm: Discovery (The Art of Problem Solving) 167
Module 93 169
93. Algorithm: Getting your Foot in the Door 169

Copyright Virtual University of Pakistan

Module 94 170
94. Algorithm: Algorithm Discovery Strategies (I) 170
Module 95 171
95. Algorithm: Algorithm Discovery Strategies (II) 171
Module 96 172
96. Algorithm: Iterative Structures (Sequential Search Algorithm) 172
Module 97 174
97. Algorithm: Iterative Structures (Loop Control) 174
Module 98 175
98. Algorithm: Iterative Structures (Components of Repetitive Control) 175
Module 99 176
99. Algorithm: Iterative Structures: Loop Execution (Examples-1) 176
Module 100 177
100. Algorithm: Iterative Structures: Loop Execution (Examples-II) 177
Module 101 179
101. Algorithm: Iterative Structures (Pretest and Posttest loops) 179
Module 102 180
102. Algorithm: Insertion Sort Algorithm 180
Module 103 181
103. Algorithm: Insertion Sort Algorithm Example 181
Module 104 182
104. Algorithm: Recursive Structure (The Binary Search Algorithm) 182
Module 105 185
105. Algorithm: Recursive Control 185
Module 106 186
106. Algorithm: Algorithm Efficiency 186
Module 107 188
107. Algorithm: Software Verification 188
Module 108 190
108. Algorithm: Software Verification Examples 190
Module 109 190
109. Programming Languages: Early Generations-I 190
Module 110 192

Copyright Virtual University of Pakistan

110. Programming Languages: Early Generations-II 192
Module 111 194
111. Programming Languages: Machine Independence 194
Module 112 195
112. Programming Languages: Imperative Paradigms 195
Module 113 197
113. Programming Languages: Declarative Paradigms 197
Module 114 198
114. Programming Languages: Functional Paradigm 198
Module 115 200
115. Programming Languages: Object Oriented Paradigm 200
Module 116 201
116. Programming Languages: Variable and Data Types 201
Module 117 203
117. Programming Languages: Data Structure 203
Module 118 205
118. Programming Languages: Assignment Statement 205
Module 119 206
119. Programming Languages: Control Structures (if-statement) 206
Module 120 207
120. Programming Languages: Control Structures (if-statement examples) 207
Module 121 208
121. Programming Languages: Control Structures (Loops) 208
Module 122 209
122. Programming Languages: Programming Concurrent Activities 209
Module 123 211
123. Programming Languages: Arithmetic Operators Examples 211
Module 124 211
124. Programming Languages: Relational Operators Examples 211
Module 125 213
125. Programming Languages: Logical Operators Examples 213
Module 126 215
126. Software Engineering: Software Engineering Discipline 215

Copyright Virtual University of Pakistan

Module 127 217
127. Software Engineering: Software Life cycle 217
Module 128 218
128. Software Engineering: Requirement Analysis Phase 218
Module 129 219
129. Software Engineering: Design Phase 219
Module 130 220
130. Software Engineering: Implementation Phase 220
Module 131 221
131. Software Engineering: Testing Phase 221
Module 132 222
132. Software Engineering: Software Engineering Methodologies (I) 222
Module 133 223
133. Software Engineering: Software Engineering Methodologies (II) 223
Module 134 224
134. Software Engineering: Software Engineering Methodologies (II) 224
Module 135 225
135. Software Engineering: Coupling 225
Module 136 227
136. Software Engineering: Cohesion 227
Module 137 228
137. Software Engineering: Information Hiding 228
Module 138 229
138. Software Engineering: Components 229
Module 139 230
139. Software Engineering: Design Patterns 230
Module 140 231
140. Software Engineering: Design Patterns Examples 231
Module 141 233
141. Software Engineering: Scope of Quality Assurance 233
Module 142 234
142. Software Engineering: Software Testing 234
Module 143 236

Copyright Virtual University of Pakistan

143. Software Engineering: Documentation 236
Module 144 238
144. Software Engineering: Human Machine Interface 238
Module 145 241
145. Software Engineering: Software Ownership and Liability 241
Module 146 243
146. Data Abstraction: Arrays and Aggregates 243
Module 147 243
147. Data Abstraction: List, Stacks and Queues 243
Module 148 245
148. Data Abstraction: Trees 245
Module 149 247
149. Data Abstraction: Pointers 247
Module 150 248
150. Database Systems: The Significance of Database Systems 248
Module 151 250
151. Database Systems: Role of Schema 250
Module 152 251
152. Database Systems: Database Management Systems 251
Module 153 253
153. Database Systems: Relational Database model 253
Module 154 254
154. Database Systems: Issues of Relational Designs 254
Module 155 256
155. Database Systems: Relational operators 256
Module 156 257
156. Database Systems: Select Operation 257
Module 157 258
157. Database Systems: project Operation 258
Module 158 259
158. Database Systems: Join Operation 259
Module 159 262
159. Database Systems: Object Oriented Databases 262

Copyright Virtual University of Pakistan

Module 160 264
160. Database Systems: Maintaining DB Integrity 264
Module 161 265
161. Database Systems: The Commit/Rollback Protocol 265
Module 162 266
162. Database Systems: Locking 266
Module 163 268
163. Database Systems: Sequential Files 268
Module 164 270
164. Database Systems: Indexed Files 270
Module 165 271
165. Database Systems: Hash Files 271
Module 166 272
166. Database Systems: Hash File Example 272
Module 167 274
167. Database Systems: Data Mining 274
Module 168 275
168. Database Systems: Data Mining Examples and Implications 275
Module 169 276
169. Database Systems: Social Impact of Database Technology 276
Module 170 278
170. Artificial Intelligence: Introduction and Vision 278
Module 171 281
171. Artificial Intelligence: Intelligent Agents 281
Module 172 284
172. Artificial Intelligence: Research Methodologies 284
Module 173 285
173. Artificial Intelligence: The Turing Test 285
Module 174 286
174. Artificial Intelligence: Understanding Images 286
Module 175 287
175. Artificial Intelligence: Language Processing 287
Module 176 289

Copyright Virtual University of Pakistan

176. CS Impact: CS impact on Society 289
Module 177 290
177. CS Impact: CS Impact on Health 290
Module 178 291
178. CS Impact: CS Impact on Environment 291
Module 179 292
179. CS Impact: Ethical Issues 292
Module 180 293
180. CS Impact: Software Licenses and Information Privacy 293
Module 181 294
181. CS Impact: Intellectual Property 294
Module 182 296
182. CS Impact: Security 296
Module 183 297
183. CS Impact: Privacy 297
Module 184 299
184. CS Impact: Social Issues of IT 299
Module 185 301
185. CS Impact: Content Filtering, Email-Spams and Laws 301
Module 186 302
186. CS Impact: Children Protection and Electronic Theft 302
Module 187 304
187. Word Processing: MS Word 304
Module 188 308
188. Word Processing: MS Word (Quick Access bar) 308
Alternate Method -- Undo & Redo by Using Keys 308
Module 189 309
189. Word Processing: MS Word (Home Ribbon) 309
Module 190 310
190. Word Processing: MS Word (Clipboard Group) 310
I want to move. I am content where I am. 311
Module 191 314
191. Word Processing: MS Word (Font Group) 314

Copyright Virtual University of Pakistan

Module 192 316
192. Word Processing: MS Word (Paragraph Group-I) 316
Module 193 318
193. Word Processing: MS Word (Paragraph Group-II) 318
Module 194 320
194. Word Processing: MS Word (Style Group) 320
Module 195 321
195. Word Processing: MS Word (Editing Group) 321
Module 196 322
196. Word Processing: MS Word (Insert Functionalities) 322
Module 197 323
197. Word Processing: MS Word (page Group) 323
Module 198 325
198. Word Processing: MS Word (Table Group) 325
Module 199 326
199. Word Processing: MS Word (Illustration Group) 326
Module 200 330
200. Word Processing: MS Word (Media and Links Groups) 330
Module 201 332
201. Word Processing: MS Word (Comments and Header & footer) 332
Module 202 333
202. Word Processing: MS Word (Text Group (Part-1)) 333
Module 203 335
203. Word Processing: MS Word (Text Group (Part-II) and Symbols Group) 335
Module 204 336
204. Word Processing: MS Word (Design Ribbon) 336
Module 205 338
205. Word Processing: MS Word (Page Setup Group in Page Layout Ribbon) 338
Module 206 339
206. Word Processing: MS Word (Page Setup Group in Page Layout Ribbon) 339
Module 207 340
207. Word Processing: MS Word (Arrange Group in Page Layout Ribbon) 340
Module 208 341

Copyright Virtual University of Pakistan

208. Word Processing: MS Word (References Ribbon) 341
Module 209 342
209. Word Processing: MS Word (Proofing Group in Review Ribbon) 342
Module 210 343
210. Word Processing: MS Word (Language Group in Review Ribbon) 343
Module 211 344
211. Word Processing: MS Word (Comments Group in Review Ribbon) 344
Module 212 345
212. Word Processing: MS Word (Tracking and Changes Groups in Review Ribbon) 345
Module 213 346
213. Word Processing: MS Word (Compare and Protect Groups in Review Ribbon) 346
Module 214 347
214. Word Processing: MS Word (View Ribbon) 347
Module 215 349
215. Presentations: MS-PowerPoint (Introduction) 349
Module 216 350
216. Presentations: MS-PowerPoint (Slides Group on Home Ribbon) 350
Module 217 350
217. Presentations: MS-PowerPoint (Design Ribbon) 350
Module 218 351
218. Presentations: MS-PowerPoint (Transition Ribbon) 351
Module 219 352
219. Presentations: MS-PowerPoint (Animation Ribbon) 352
Module 220 353
220. Spreadsheets: MS Excel (Introduction) 353
Module 221 355
221. Spreadsheets: MS Excel (Functions) 355
Module 222 358
222. Spreadsheets: MS Excel (Application Scenarios-I) 358
Module 223 359
223. Spreadsheets: MS Excel (Application Scenarios-II) 359
Module 224 361
224. Spreadsheets: MS Excel (Sorting and Filter) 361

Copyright Virtual University of Pakistan

Module 225 363
225. Database: MS Access (Introduction) 363
Module 226 365
226. Database: MS Access (Creating and Managing Tables) 365
Module 227 366
227. Database: MS Access (Creating Forms) 366
Module 228 367
228. Database: MS Access (Creating Reports) 367
Module 229 368
229. Database: MS Access (Query Wizard) 368
Module 230 372
230. Web page Development (Notepad Editor) 372
Module 231 374
231. Web page Development (Introduction to Dreamweaver) 374
Module 232 377
232. Web page Development (Inserting Tables using Dreamweaver) 377
Module 233 380
233. Web page Development (Inserting Lists) 380
Module 234 381
234. Web page Development (Inserting Images) 381

Table of Figures:

Figure 1: Job Opportunities in Pakistan when classified as "By Function" 27

Copyright Virtual University of Pakistan

Figure 2: Job Opportunities in Pakistan when classified as “By Industry” 28
Figure 3: Market share of Search Engines [gs.statcounter.com/search-engine-market-share] 31
Figure 4: Google Search Engine home page 31
Figure 5: Weather searching on Google 33
Figure 6: Calculations on Google 33
Figure 7: Currency conversion on Google 34
Figure 8: Searching in Social media over Google 35
Figure 9: searching for a price at Google 35
Figure 10: Searching Hash tag 36
Figure 11: Abacus 42
Figure 12: Gear Technology 43
Figure 13: Punch Cards 43
Figure 14: ENIAC 44
Figure 15: AND, OR Boolean operation 48
Figure 16: XoR, Not operation 49
Figure 17: Flip flop 51
Figure 18: Byte organization in memory 51
Figure 19: Memory arranged with respect to addresses 52
Figure 20: Disk Storage System 53
Figure 21: Data storage in CD 55
Figure 22: ASCII code example 57
Figure 23: Encoding the amplitude of the sound 60
Figure 24: Algorithm for converting positive decimal to binary number 61
Figure 25: Algorithm working for converting positive decimal to binary 62
Figure 26: Binary Addition basics 63
Figure 27: Example 1 of Binary Addition 63
Figure 28: Example 2 of Binary Addition 63
Figure 29: Example 3 of Binary Addition 64
Figure 30: Radix point example 65
Figure 31: Understanding Fraction represented in Binary 65
Figure 32: Binary addition 65
Figure 33: 2's complement notation for three bits patterns 66
Figure 34: 2's complement notation for four bits patterns 66
Figure 35: Addition in 2's complement notation 67
Figure 36: Excess eight notation 68
Figure 37: Excess Four notation 68
Figure 38: Excess four notation comparisons 69
Figure 39: Floating-point notation components 70
Figure 40: Encoding the value 2^{5-8} 72
Figure 41: CPU and main memory connected via a bus 78
Figure 42: Adding values stored in memory 79
Figure 43: CPU and Main memory linkage using Bus 83
Figure 44: Machine Cycle 83
Figure 45: Machine Instructions for adding two numbers 84

Copyright Virtual University of Pakistan

Figure 46: Machine instructions loaded in the main memory 85
Figure 47: Arithmetic Operations Examples 90
Figure 48: Controllers attached to a machine's bus 91
Figure 49: Serial communication 93
Figure 50: Batch Processing 95
Figure 51: Interactive Processing 96
Figure 52: Time Sharing 97
Figure 53: Software Classification 99
Figure 54: Components of OS 101
Figure 55: process of Booting 104
Figure 56: Multiprogramming between process A and process B 107
Figure 57: Resource Allocation Issues 109
Figure 58: Deadlock Situation 112
Figure 59: Two popular network topologies 117
Figure 60: Communication over a bus network 118
Figure 61: The hidden terminal problem 119
Figure 62: Building a large bus network from smaller ones 120
Figure 63: Routers connecting two WiFi networks and an Ethernet network to form an internet 121
Figure 64: The client/server model compared to the peer-to-peer model 122
Figure 65: Internet composition 125
Figure 66: Email procedure 130
Figure 67: A typical URL 134
Figure 68: A simple webpage 136
Figure 69: An enhanced simple webpage 137
Figure 70: <b> tag on w3school 138
Figure 71: Code and output for <b> tag 138
Figure 72: The first two bars of Beethoven's Fifth Symphony 139
Figure 73: Package-shipping example 143
Figure 74: The Internet software layers 144
Figure 75: Following a message through the Internet 145
Figure 76: Choosing between TCP and UDP 148
Figure 77: Public key encryption 155
Figure 78: Folding a bird from a square piece of paper 161
Figure 79: Origami primitives 162
Figure 80: The function Greetings in pseudocode 166
Figure 81: Analyzing the possibilities 168
Figure 82: The sequential search algorithm in pseudocode 173
Figure 83: Components of repetitive control 175
Figure 84: Pretest and Posttest loop 179
Figure 85: Sorting the list Fred, Alex, Diana, Byron, and Carol alphabetically 181
Figure 86: Applying our strategy to search a list for the entry John 183
Figure 87: A first draft of the binary search technique 183
Figure 88: The binary search algorithm in pseudocode 184
Figure 89: Separating the chain using only three cuts 188

Copyright Virtual University of Pakistan

Figure 90: Solving the problem with only one cut 189
Figure 91: Generations of programming languages 195
Figure 92: The evolution of programming paradigms 196
Figure 93: A function for checkbook balancing constructed from simpler functions 199
Figure 94: A two-dimensional array with two rows and nine columns 203
Figure 95: The conceptual layout of the structure Employee 204
Figure 96: Spawning threads 210
Figure 97: The software life cycle 217
Figure 98: The traditional development phase of the software life cycle 218
Figure 99: A simple structure chart 224
Figure 100: The interaction between objects resulting from PlayerA's serve. 225
Figure 101: Logical and functional cohesion within an object 227
Figure 102: Factory Design Pattern 231
Figure 103: Shopping Cart Design Pattern 232
Figure 104: Lists, stacks, and queues 244
Figure 105: An example of an organization chart 245
Figure 106: Tree terminology 245
Figure 107: Novels arranged by title but linked according to authorship 247
Figure 108: A file versus a database organization 248
Figure 109: The conceptual layers of a database implementation 251
Figure 110: A relation containing employee information 253
Figure 111: A relation containing redundancy 254
Figure 112: An employee database consisting of three relations 255
Figure 113: The SELECT operation 257
Figure 114: The PROJECT operation 258
Figure 115: The Join Operation 259
Figure 116: Another example of the JOIN operation 260
Figure 117: An application of the JOIN operation 261
Figure 118: The associations between objects in an object-oriented database 262
Figure 119: The structure of a simple employee file implemented as a text file 268
Figure 120: Opening an indexed file 270
Figure 121: Hashing the key field value 25X3Z to one of 41 buckets 272
Figure 122: The rudiments of a hashing system 273
Figure 123: Robot 278
Figure 124: Self Driving Cars 278
Figure 125: Medical robot helping the patients 279
Figure 126: Receptionist Robot 279
Figure 127: Robot draws blood 280
Figure 128: The eight-puzzle in its solved configuration 282
Figure 129: Our puzzle-solving machine 283
Figure 130: Start Menu to launch MS Word 304
Figure 131: MS Word Home ribbon 304
Figure 132: MS Word home ribbon after click 305
Figure 133: Font Panel 306

Copyright Virtual University of Pakistan

Figure 134: Bold Clicked in Font Panel 306
Figure 135: Font Panel Changing Case 306
Figure 136: Underline Panel 307
Figure 137: Panel Launch Buttons 307
Figure 138: Mini Toolbar 307
Figure 139: Quick Access toolbar 308
Figure 140: Home ribbon 309
Figure 141: Clipboard Group 310
Figure 142: Cut option in clipboard group 311
Figure 143: Pasting in Document 311
Figure 144: Pasting in Document (Alternate Method) 312
Figure 145: Pasting in Document (Alternate Method) 312
Figure 146: Font group 314
Figure 147: Typing your name 314
Figure 148: Changing font 314
Figure 149: Applying bold and underline 315
Figure 150: Changing Font Size 315
Figure 151: Paragraph Group 316
Figure 152: Numbers varriations in paragraph group 316
Figure 153: Bullets variations in paragraph group 317
Figure 154: Bullet selection 318
Figure 155: Adding Numbered Lists 319
Figure 156: Style Group 320
Figure 157: Editing group 321
Figure 158: Inert tab 322
Figure 159: Pages group in the insert tab 323
Figure 160: Inserting Cover Page 323
Figure 161: Removing cover page 324
Figure 162: Tables group 325
Figure 163: Selecting Rows and Columns 325
Figure 164: Illustrations 326
Figure 165: Shapes types in Word 327
Figure 166: Shapes required to make snowman 327
Figure 167: Snowman 327
Figure 168: Smart Art 328
Figure 169: Basic cycle 328
Figure 170: Human Life Cycle 329
Figure 171: Adding and Removing Objects 329
Figure 172: Links group 330
Figure 173: Adding Hyperlink 330
Figure 174: Adding Bookmark 331
Figure 175: Header and Footer 332
Figure 176: Header in edit mode 332
Figure 177: After Header Insertion 332

Copyright Virtual University of Pakistan

Figure 178: Text group 333
Figure 179: Adding Text Box 333
Figure 180: Word Art Gallery 334
Figure 181: Drop cap 'P' 335
Figure 182: Design Ribbon 336
Figure 183: Page background group 336
Figure 184: Page setup group 338
Figure 185: Text selections for 2-columns display 338
Figure 186: Text in two columns 338
Figure 187: Paragraph group in page layout 339
Figure 188: Arrange Group 340
Figure 189: Table of Content 341
Figure 190: Footnotes Group 341
Figure 191: Proofing group 342
Figure 192: Language group 343
Figure 193: Comments group 344
Figure 194: Tracking group 345
Figure 195: Changes group 345
Figure 196: Compare group 346
Figure 197: Protect group 346
Figure 198: Views group 347
Figure 199: Show group 347
Figure 200: Zoom group 347
Figure 201: Windows group 348
Figure 202: MS: Powerpoint 349
Figure 203: Slides group in home ribbon 350
Figure 204: Themes group 350
Figure 205: Transition group 351
Figure 206: Transition timing group 351
Figure 207: Animations group 352
Figure 208: Spread Sheet Example 353
Figure 209: Excel Layout 354
Figure 210: Cell formatting 354
Figure 211: Charts group 355
Figure 212: Chart example in Excel 355
Figure 213: Formula Example 355
Figure 214: Formula ribbon 356
Figure 215: Data for Sum Formula 356
Figure 216: Sum Formula 356
Figure 217: Result of Sum Formula 357
Figure 218: Function Computation 357
Figure 219: Sum of marks 358
Figure 220: Result of sum formula 358
Figure 221: Personal expense sheet 359

Copyright Virtual University of Pakistan

Figure 222: Finding total expense for the January month 359
Figure 223: Result of query from Figure 222 360
Figure 224: Total bill Expense-head wise 360
Figure 225: Sort and Filter 361
Figure 226: Custom Sort 362
Figure 227: MS Access ribbon 363
Figure 228: Create Blank Database 363
Figure 229: Naming and saving database 364
Figure 230: Blank Database 364
Figure 231: External data Ribbon 364
Figure 232: Create tab 365
Figure 2334: Saved Form "studentForm" 366
Figure 234: Insert Report 367
Figure 235: Student Table Report 367
Figure 236: Query Group: Query Wizard 368
Figure 237: Creating Query using wizard 369
Figure 238: Query Result after saving 369
Figure 239: SQL View 370
Figure 240: SQL View Query Syntax 370
Figure 241: Query Design View 371
Figure 242: Create Query Using Design View 371
Figure 243: HTML code in Notepad 373
Figure 244: Saving as html page 373
Figure 245: First web page output 373
Figure 246: Dreamweaver interface 375
Figure 247: Properties panel 376
Figure 248: Add new page 377
Figure 249: Adding HTML page 377
Figure 250: Naming the page 378
Figure 251: Insert Table 378
Figure 252: Rows and columns 378
Figure 253: Adjusting row sizes 379
Figure 254: Adding unordered list 380
Figure 255: List of properties 380
Figure 256: Inserting Image 381
Figure 257: Browse Image 381

Module 1

Copyright Virtual University of Pakistan

Module 83

83. Networking and the Internet: Encryption

In some cases, the purpose of network vandalism is to disrupt the system (as in denial of service attacks), but in other cases the ultimate goal is to gain access to information. The traditional means of protecting information is to control its access through the use of passwords. However, passwords can be compromised and are of little value when data are transferred over networks and internet where messages are relayed by unknown entities. In these cases, encryption can be used so that even if the data fall into unscrupulous hands, the encoded information will remain confidential. Today, many traditional Internet applications have been altered to incorporate encryption techniques, producing what are called "secure versions" of the applications.

A prime example is the secure version of HTTP, known as **HTTPS,** which is used by most financial institutions to provide customers with secure Internet access to their accounts. The backbone of HTTPS is the protocol system known as **Secure Sockets Layer (SSL),** which was originally developed by Netscape to provide secure communication links between Web clients and servers. Most browsers indicate the use of SSL by displaying a tiny padlock icon on the computer screen. (Some use the presence or absence of the icon to indicate whether SSL is being used; others display the padlock in either the locked or unlocked position.)

One of the more fascinating topics in the field of encryption is **public-key encryption,** which involves techniques by which encryption systems are designed so that having knowledge about how messages are encrypted does not allow one to decrypt messages. This characteristic is somewhat counterintuitive. After all, intuition would suggest that if a person knows how messages are encrypted, then that person should be able to reverse the encryption process and thus decrypt messages. But public-key encryption systems defy this intuitive logic.

A public-key encryption system involves the use of two values called keys. One key, known as the **public key,** is used to encrypt messages; the other key, known as the **private key,** is required to decrypt messages. To use the system, the public key is first distributed to those who might need to send messages to a particular destination. The private key is held in confidence at this destination. Then, the originator of a message can encrypt the message using the public key and send the message to its destination with assurance that its contents are safe, even if it is handled by intermediaries who also know the public key. Indeed, the only party that can decrypt the message is the party at the message's destination who holds the private key. Thus if Bob creates a public-key encryption system and gives both Alice and Carol the public key, then both Alice and Carol can encrypt messages to Bob, but they cannot spy on the other's communication. Indeed, if Carol intercepts a message from Alice, she cannot decrypt it even though she knows how Alice encrypted it (Figure 77).

There are, of course, subtle problems lurking within public-key systems. One is to ensure that the public key being used is, in fact, the proper key for the destination party. For example, if you are communicating with your bank, you want to be sure that the public key you are using for encryption is the one for the bank and not an impostor. If an impostor presents itself as the bank (an example of spoofing) and gives you its public key, the messages you encrypt and send to the "bank" would be meaningful to the impostor and not your bank. Thus, the task of associating public keys with correct parties is significant.

One approach to resolving this problem is to establish trusted Internet sites, called **certificate authorities,** whose task is to maintain accurate lists of parties and their public keys. These authorities, acting as servers, then provide reliable public-key information to their clients in

Copyright Virtual University of Pakistan

packages known as **certificates.** A certificate is a package containing a party's name and that party's public key.

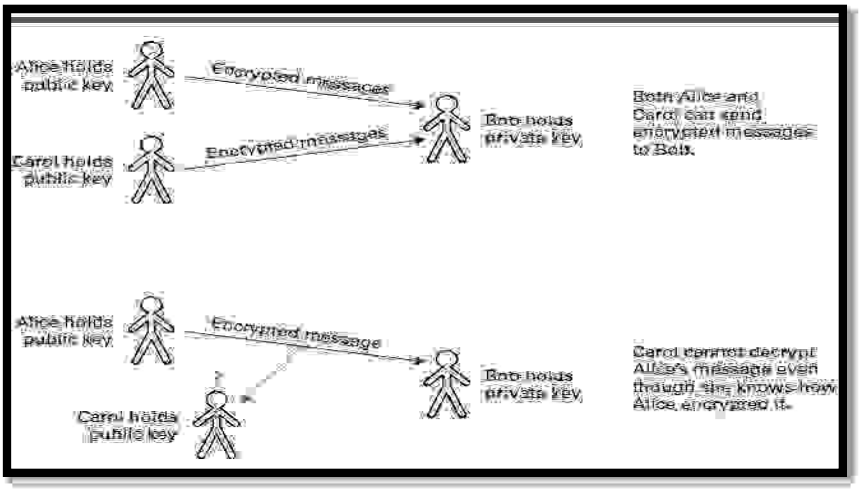


Figure 77: Public key encryption

Many commercial certificate authorities are now available on the Internet, although it is also common for organizations to maintain their own certificate authorities in order to maintain tighter control over the security of the organization's communication.

Finally, we should comment on the role public-key encryption systems play in solving problems of **authentication**—making sure that the author of a message is, in fact, the party it claims to be. The critical point here is that, in some public-key encryption systems, the roles of the encryption and decryption keys can be reversed. That is, text can be encrypted with the private key, and because only one party has access to that key, any text that is so encrypted must have originated from that party. In this manner, the holder of the private key can produce a bit pattern, called a **digital signature,** that only that party knows how to produce. By attaching that signature to a message, the sender can mark the message as being authentic. A digital signature can be as simple as the encrypted version of the message itself. All the sender must do is encrypt the message being transmitted using his or her private key (the key typically used for decrypting). When the message is received, the receiver uses the sender's public key to decrypt the signature. The message that is revealed is guaranteed to be authentic because only the holder of the private key could have produced the encrypted version.

Copyright Virtual University of Pakistan

Module 84

84. Networking and the Internet: Legal Approaches to Network Security

- ✓ Enhancing the security of computer networking systems is to apply legal remedies.
- ✓ Defining what is legal and what is illegal in different contexts.
- ✓ Illegal actions may lead to punishment.

Two Issues

- ✓ Making an action illegal does not stop the action.
- ✓ International law, Illegal in one country and legal in another country.

US – Computer Fraud and Abuse Act

- ✓ Passed in 1984 and has been revised many times.
- ✓ Covers:
  - Worms and Viruses
  - Theft of Information
  - Many more related things are covered anything of value.

US – Electronic Communication Privacy Act (ECPA)

- ✓ Employers/ISP rights to look into the communications of employees.
- ✓ Illegal for ISP to make available the private information
- ✓ Employers can access information especially when the equipment of employer is used?

Pakistan – CyberSecurity Law

- ✓ National Assembly Passes New Cybercrime Law. In 2016.
  - ✓ Punishment of 10 years for first offenders and 20 years for repeat offenders. Details can be found at: http://thehill.com/policy/cybersecurity/265285-judges-struggle-with-cyber-crime-punishment
  - ✓ Covers many security concerns e.g.,
    - Hacking
    - Phishing
    - Malware
    - Hacking tools
    - Identity Theft/fraud.
    - Electronic theft.

Pakistan – Applicable security Acts

Copyright Virtual University of Pakistan

- ✓ Prevention of Electronic Crimes Ordinance, 2007
- ✓ Electronic Transaction Ordinance, 2002, 2008
- ✓ Pakistan Telecommunication (Re-organization) Act, 1996
- ✓ Wireless telegraphy Act, 1933
- ✓ Telegraph Act, 1885.
- ✓ Federal Investigation Agency Act, 1974
- ✓ Payments and Electronic Fund Transfers Act, 2007

Copyright Virtual University of Pakistan

Module 85

85. Algorithm: an Informal Review

Algorithm

- ✓ Set of steps that define how a task is performed.
- ✓ Let's start discussing simple Algorithms

Making a Cup of Tea

1. Put water in kettle
2. Boil water
3. Put Tea in water
4. Add Milk
5. Stir
6. Add Sugar
7. Put tea in cup
8. Fetch cup

Convert KM to Meters

1. Take input of KM's
2. Multiply the input with 1000.
3. Display the result

Machine Cycle

As long as the halt instruction has not been executed continue to execute the following steps:

a. Fetch an instruction.

b. Decode the instruction.

c. Execute the instruction.

Algorithm Execution

Many researchers believe that every activity of the human mind, including imagination, creativity, and decision making, is actually the result of algorithm execution.

Copyright Virtual University of Pakistan

Module 86

86. Algorithm: Formal Definition of Algorithm

Formal Definition

An algorithm is an ordered set of unambiguous, executable steps that defines a terminating process.

Order vs sequence

- ✓ Have a well-established structure in terms of the order of their execution
- ✓ Does not mean a sequence – like we do not have in parallel processing.
- ✓ Flip-flops producing their output individually and then together they have a meaning.

Executable

- ✓ Make a list of all the positive integers.
- ✓ Computer scientists use the term effective to capture the concept of being executable.

Unambiguous

The information in the state of the process must be sufficient to determine uniquely and completely the actions required by each step.

Make a pretty cartoon!

Terminating Process

The execution of an algorithm must lead to an end.

But!

- ✓ Monitoring the vital signs of a hospital patient
- ✓ Maintaining an aircraft's altitude in flight.

Copyright Virtual University of Pakistan

Module 87

87. Algorithm: Abstract Nature of Algorithms

It is important to emphasize the distinction between an algorithm and its representation—a distinction that is analogous to that between a story and a book. A story is abstract, or conceptual, in nature; a book is a physical representation of a story. If a book is translated into another language or republished in a different format, it is merely the representation of the story that changes—the story itself remains the same.

In the same manner, an algorithm is abstract and distinct from its representation. A single algorithm can be represented in many ways. As an example, the algorithm for converting temperature readings from Celsius to Fahrenheit is traditionally represented as the algebraic formula

F = (9/5)C + 32

But it could be represented by the instruction

Multiply the temperature reading in Celsius by 9⁄5

and then add 32 to the product

or even in the form of an electronic circuit. In each case the underlying algorithm is the same; only the representations differ.

The distinction between an algorithm and its representation presents a problem when we try to communicate algorithms. A common example involves the level of detail at which an algorithm must be described. Among meteorologists, the instruction "Convert the Celsius reading to its Fahrenheit equivalent" suffices, but a layperson, requiring a more detailed description, might argue that the instruction is ambiguous. The problem, however, is not with the underlying algorithm but that the algorithm is not represented in enough detail for the layperson. In the next section we will see how the concept of primitives can be used to eliminate such ambiguity problems in an algorithm's representation.

Finally, while on the subject of algorithms and their representations, we should clarify the distinction between two other related concepts—programs and processes. A *program* is a representation of an algorithm. (Here we are using the term *algorithm* in its less formal sense in that many programs are representations of nonterminating "algorithms.") In fact, within the computing community the term *program* usually refers to a formal representation of an algorithm designed for computer application. We defined a *process* already to be the activity of executing a program. Note, however, that to execute a program is to execute the algorithm represented by the program, so a process could equivalently be defined as the activity of executing an algorithm. We conclude that programs, algorithms, and processes are distinct, yet related, entities. A program is the representation of an algorithm, whereas a process is the activity of executing an algorithm.

Copyright Virtual University of Pakistan

Module 88

88. Algorithm: Representation (Primitives)

The representation of an algorithm requires some form of language. In the case of humans, this might be a traditional natural language (English, Spanish, Russian, Japanese) or perhaps the language of pictures, as demonstrated in Figure 78, which describes an algorithm for folding a bird from a square piece of paper. Often, however, such natural channels of communication lead to misunderstandings, sometimes because the terminology used has more than one meaning. (The sentence, "Visiting grandchildren can be nerve-racking," could mean either that the grandchildren cause problems when they come to visit or that going to see them is problematic.) Problems also arise over misunderstandings regarding the level of detail required. Few readers could successfully fold a bird from the directions given in Figure 78, yet a student of origami would probably have little difficulty. In short, communication problems arise when the language used for an algorithm's representation is not precisely defined or when information is not given in adequate detail.

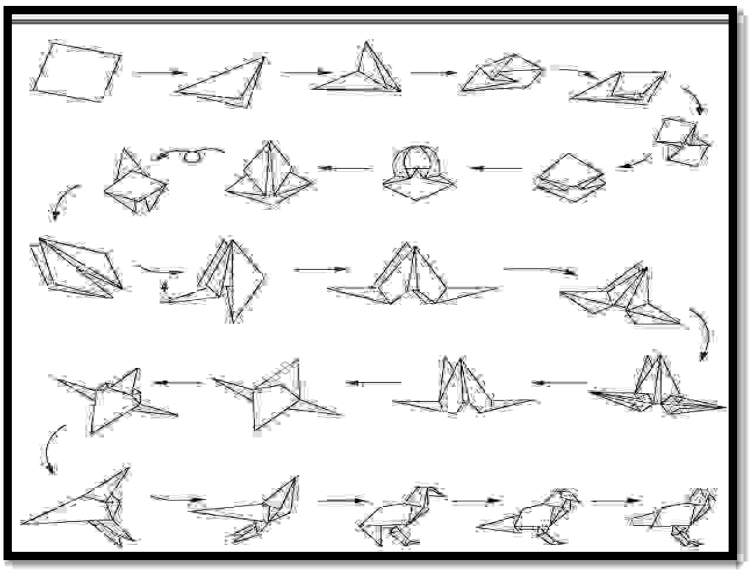


Figure 78: Folding a bird from a square piece of paper

Computer science approaches these problems by establishing a well-defined set of building blocks from which algorithm representations can be constructed. Such a building block is called a **primitive.** Assigning precise definitions to these primitives removes many problems of ambiguity and requiring algorithms to be described in terms of these primitives establishes a uniform level of detail. A collection of primitives along with a collection of rules stating how the primitives can be combined to represent more complex ideas constitutes a **programming language.** Each primitive has its own syntax and semantics. Syntax refers to the primitive's symbolic representation; semantics refers to the meaning of the primitive. The syntax of *air* consists of three symbols, whereas the semantics is a gaseous substance that surrounds the world. As an example, Figure 79 presents some of the primitives used in origami.

Copyright Virtual University of Pakistan

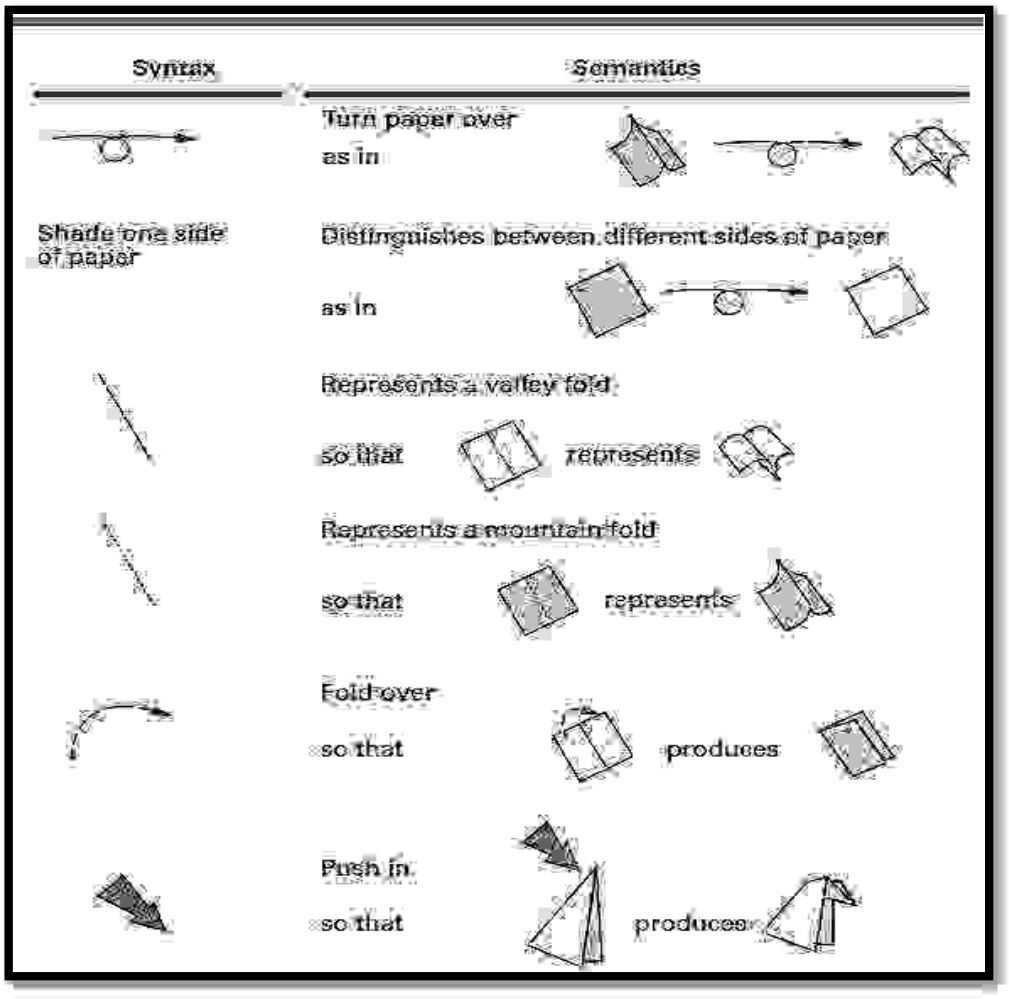


Figure 79: Origami primitives

To obtain a collection of primitives to use in representing algorithms for computer execution, we could turn to the individual instructions that the machine is designed to execute. If an algorithm is expressed at this level of detail, we will certainly have a program suitable for machine execution. However, expressing algorithms at this level is tedious, and so one normally uses a collection of "higher-level" primitives, each being an abstract tool constructed from the lower-level primitives provided in the machine's language. The result is a formal programming language in which algorithms can be expressed at a conceptually higher level than in machine language. We will discuss such programming languages in the next chapter

Copyright Virtual University of Pakistan

Module 89

89. Algorithm: Representation (Pseudocode)

For now, we forgo the introduction of a formal programming language in favor of a less formal, more intuitive notational system known as pseudocode. In general, a pseudocode is a notational system in which ideas can be expressed informally during the algorithm development process.

One way to obtain a pseudocode is simply to loosen the rules of a formal programming language, borrowing the syntax-semantic structures of the language, intermixed with less formal constructs. There are many such pseudocode variants, because there are many programming languages in existence. Two particularly popular choices are loose versions of the languages Algol and Pascal, largely because these were widely used in textbooks and academic papers for decades. More recently, pseudocode reminiscent of the Java and C languages has proliferated, again because most programmers will have at least a reading knowledge of these languages. Regardless of where a pseudocode borrows its syntax from, one essential property is required for it to serve its purpose in expressing algorithms: A pseudocode must have a consistent, concise notation for representing recurring semantic structures.

One semantic structure is the saving of a computed value. For example, if we have computed the sum of our checking and savings account balances, we may want to save the result so we can refer to it later. In such cases we will use the form

name = expression

where name is the name by which we will refer to the result and expression describes the computation whose result is to be saved. This pseudocode structure directly follows the equivalent Python assignment statement, which we introduced in Chapter 1 for storing a value into a Python variable. For example, the statement

RemainingFunds = CheckingBalance + SavingsBalance

is an assignment statement that assigns the sum of CheckingBalance and SavingsBalance to the name RemainingFunds? Thus, the term RemainingFunds can be used in future statements to refer to that sum.

Another recurring semantic structure is the selection of one of two possible activities depending on the truth or falseness of some condition. Examples include:

If the gross domestic product has increased, buy common stock otherwise sell common stock.

Buy common stock if the gross domestic product has increased and sell it otherwise.

Buy or sell common stock depending on whether the gross domestic product has increased or decreased, respectively.

Each of these statements could be rewritten to conform to the structure

if (condition):

activity

else:

activity

where we have used the keywords if and else to announce the different sub- structures within the main structure and have used colons and indentation to delineate the boundaries of these substructures. The condition and the else will always be followed immediately by a colon. The corresponding activity will be indented. If an activity consists of multiple steps, they will all be similarly indented. By adopting this

Copyright Virtual University of Pakistan

syntactic structure for our pseudocode, we acquire a uniform way in which to express this common semantic structure. Thus, whereas the statement

Depending on whether the year is a leap year, divide the total by 366 or 365, respectively might possess a more creative literary style, we will consistently opt for the straightforward condition:

if (year is leap year): daily total = total / 366

else:

daily total = total / 365

Copyright Virtual University of Pakistan

Module 90

90. Algorithm: Representation (Pseudocode) While-Structure

Another common semantic structure is the repeated execution of a statement or sequence of statements as long as some condition remains true. Informal examples include:

As long as there are tickets to sell, continue selling tickets.

And

While there are tickets to sell, keep selling tickets.

For such cases, we adopt the uniform pattern

while (condition):

Activity

For our pseudocode. In short, such a statement means to check the condition and, if it is true, perform the activity and return to check the condition again. If, however, the condition is found to be false, move on to the next instruction following the while structure. Thus, both of the preceding statements are reduced to:

while (tickets remain to be sold):

sell a ticket

Copyright Virtual University of Pakistan

Module 91

91. Algorithm: Representation (Pseudocode) Function-Structure

We want to use our pseudocode to describe activities that can be used as abstract tools in other applications. Computer science has a variety of terms for such program units, including subprogram, subroutine, procedure, method, and function, each with its own variation of meaning. We will follow Python convention, using the term **function** for our pseudocode and using the Python keyword def to announce the title by which the pseudocode unit will be known. More precisely, we will begin a pseudocode unit with a statement of the form

def name():

where name is the particular name of the unit. We will then follow this introductory statement with the statements that define the unit's action. For example, Figure 80 is a pseudocode representation of a function called Greetings that prints the message "Hello" three times.

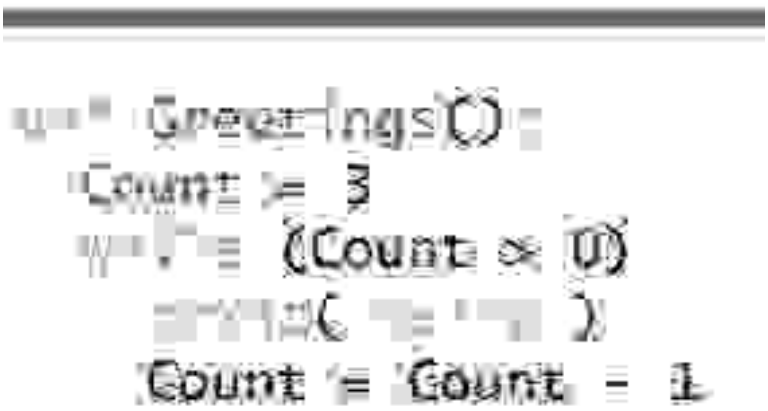


Figure 80: The function Greetings in pseudocode

When the task performed by a function is required elsewhere in our pseudo code, we will merely request it by name. For example, if two functions were named **ProcessLoan** and **RejectApplication**, then we could request their services within an if-else structure by writing

if (. . .):

ProcessLoan()

else:

RejectApplication()

which would result in the execution of the function **ProcessLoan** if the tested condition were true or in the execution of **RejectApplication** if the condition were false.

Copyright Virtual University of Pakistan

Module 92

92. Algorithm: Discovery (The Art of Problem Solving)

The techniques of problem solving and the need to learn more about them are not unique to computer science but rather are topics pertinent to almost any field. The close association between the process of algorithm discovery and that of general problem solving has caused computer scientists to join with those of other disciplines in the search for better problem-solving techniques. Ultimately, one would like to reduce the process of problem solving to an algorithm in itself, but this has been shown to be impossible. Thus the ability to solve problems remains more of an artistic skill to be developed than a precise science to be learned.

As evidence of the elusive, artistic nature of problem solving, the following loosely defined problem-solving phases presented by the mathematician G. Polya in 1945 remain the basic principles on which many attempts to teach problem-solving skills are based today.

Phase 1. **Understand the problem.**

Phase 2. **Devise a plan for solving the problem.**

Phase 3. **Carry out the plan.**

Phase 4. **Evaluate the solution for accuracy and for its potential as a tool for solving other problems.**

Translated into the context of program development, these phases become

Phase 1. **Understand the problem.**

Phase 2. **Get an idea of how an algorithmic function might solve the problem.**

Phase 3. **Formulate the algorithm and represent it as a program.**

Phase 4. **Evaluate the program for accuracy and for its potential as a tool for solving other problems.**

As an example, consider the following problem:

Person A is charged with the task of determining the ages of person B's three children. B tells A that the product of the children's ages is 36. After considering this clue, A replies that another clue is required, so B tells A the sum of the children's ages. Again, A replies that another clue is needed, so B tells A that the oldest child plays the piano. After hearing this clue, A tells B the ages of the three children.

How old are the three children?

At first glance the last clue seems to be totally unrelated to the problem, yet it is apparently this clue that allows A to finally determine the ages of the children. How can this be? Let us proceed by formulating a plan of attack and following this plan, even though we still have many questions about the problem. Our plan will be to trace the steps described by the problem statement while keeping track of the information available to person A as the story progresses.

The first clue given A is that the product of the children's ages is 36. This means that the triple representing the three ages is one of those listed in Figure 81(a). The next clue is the sum of the desired triple. We are not told what this sum is but we are told that this information is not enough for A to isolate the correct triple; therefore the desired triple must be one whose sum appears at least twice in the table of Figure 81(b). But the only triples appearing in Figure 81(b) with identical sums are (1,6,6) and (2,2,9), both of which produce the sum 13. This is the information available to A at the time the last clue is given. It is at this point that we finally understand the significance of the last clue. It has nothing to do with playing the piano; rather

Copyright Virtual University of Pakistan

it is the fact that there is an oldest child. This rules out the triple (1,6,6) and thus allows us to conclude that the children's ages are 2, 2, and 9.

In this case, then, it is not until we attempt to implement our plan for solving the problem (Phase 3) that we gain a complete understanding of the problem (Phase 1). Had we insisted on completing Phase 1 before proceeding, we would probably never have found the children's ages. Such irregularities in the problem-solving process are fundamental to the difficulties in developing systematic approaches to problem solving.

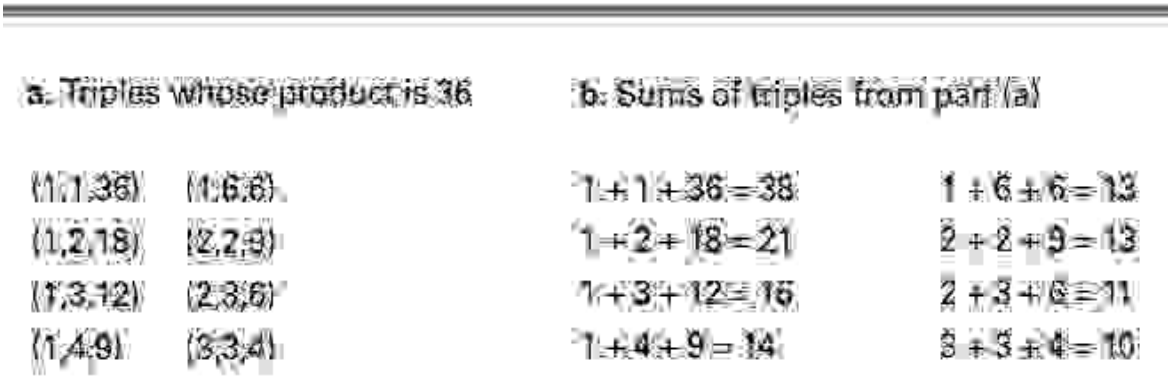


Figure 81: Analyzing the possibilities

Copyright Virtual University of Pakistan

Module 93

93. Algorithm: Getting your Foot in the Door

We have been discussing problem solving from a somewhat philosophical point of view while avoiding a direct confrontation with the question of how we should go about trying to solve a problem. There are, of course, numerous problem-solving approaches, each of which can be successful in certain settings. We will identify some of them shortly. For now, we note that there seems to be a common thread running through these techniques, which simply stated is "get your foot in the door." As an example, let us consider the following simple problem:

Before A, B, C, and D ran a race they made the following predictions:

A predicted that B would win.

B predicted that D would be last.

C predicted that A would be third

D predicted that A's prediction would be correct.

Only one of these predictions was true, and this was the prediction made by the winner. In what order did A, B, C, and D finish the race?

After reading the problem and analyzing the data, it should not take long to realize that since the predictions of A and D were equivalent and only one prediction was true, the predictions of both A and D must be false. Thus, neither A nor D were winners. At this point we have our foot in the door and obtaining the complete solution to our problem is merely a matter of extending our knowledge from here. If A's prediction was false, then B did not win either. The only remaining choice for the winner is C. Thus, C won the race, and C's prediction was true. Consequently, we know that A came in third. That means that the finishing order was either CBAD or CDAB. But the former is ruled out because B's prediction must be false. Therefore, the finishing order was CDAB.

Copyright Virtual University of Pakistan

Module 94

94. Algorithm: Algorithm Discovery Strategies (I)

Of course, being told to get our foot in the door is not the same as being told how to do it. Obtaining this toehold, as well as realizing how to expand this initial thrust into a complete solution to the problem, requires creative input from the problem solver. There are, however, several general approaches that have been proposed by Polya and others for how one might go about getting a foot in the door. One is to try working the problem backward. For instance, if the problem is to find a way of producing a particular output from a given input, one might start with that output and attempt to back up to the given input. This approach is typical of people trying to discover the bird-folding algorithm in the previous section. They tend to unfold a completed bird in an attempt to see how it is constructed.

Another general problem-solving approach is to look for a related problem that is either easier to solve or has been solved before and then try to apply its solution to the current problem. This technique is of particular value in the context of program development. Generally, program development is not the process of solving a particular instance of a problem but rather of finding a general algorithm that can be used to solve all instances of the problem. More precisely, if we were faced with the task of developing a program for alphabetizing lists of names, our task would not be to sort a particular list but to find a general algorithm that could be used to sort any list of names. Thus, although the instructions

1. Interchange the names David and Alice.
2. Move the name Carol to the position between Alice and David.
3. Move the name Bob to the position between Alice and Carol.

correctly sort the list David, Alice, Carol, and Bob, they do not constitute the general-purpose algorithm we desire. What we need is an algorithm that can sort this list as well as other lists we might encounter. This is not to say that our solution for sorting a particular list is totally worthless in our search for a general-purpose algorithm. We might, for instance, get our foot in the door by considering such special cases in an attempt to find general principles that can in turn be used to develop the desired general-purpose algorithm. In this case, then, our solution is obtained by the technique of solving a collection of related problems.

Copyright Virtual University of Pakistan

Module 95

95. Algorithm: Algorithm Discovery Strategies (II)

Another approach to getting a foot in the door is to apply **stepwise refinement,** which is essentially the technique of not trying to conquer an entire task (in all its detail) at once. Rather, stepwise refinement proposes that one first view the problem at hand in terms of several subproblems. The idea is that by breaking the original problem into subproblems, one is able to approach the overall solution in terms of steps, each of which is easier to solve than the entire original problem. In turn, stepwise refinement proposes that these steps be decomposed into smaller steps and these smaller steps be broken into still smaller ones until the entire problem has been reduced to a collection of easily solved subproblems.

In this light, stepwise refinement is a **top-down methodology** in that it progresses from the general to the specific. In contrast, a **bottom-up methodology** progresses from the specific to the general. Although contrasting in theory, the two approaches often complement each other in creative problem solving. The decomposition of a problem proposed by the top-down methodology of stepwise refinement is often guided by the problem solver's intuition, which might be working in a bottom-up mode.

Copyright Virtual University of Pakistan

Module 96

96. Algorithm: Iterative Structures (Sequential Search Algorithm)

Consider the problem of searching within a list for the occurrence of a particular target value. We want to develop an algorithm that determines whether that value is in the list. If the value is in the list, we consider the search a success; otherwise we consider it a failure. We assume that the list is sorted according to some rule for ordering its entries. For example, if the list is a list of names, we assume the names appear in alphabetical order, or if the list consists of numeric values, we assume its entries appear in order of increasing magnitude.

To get our foot in the door, we imagine how we might search a guest list of perhaps 20 entries for a particular name. In this setting we might scan the list from its beginning, comparing each entry with the target name. If we find the target name, the search terminates as a success. However, if we reach the end of the list without finding the target value, our search terminates as a failure. In fact, if we reach a name greater than (alphabetically) the target name without finding the target, our search terminates as a failure. (Remember, the list is arranged in alphabetical order, so reaching a name greater than the target name indicates that the target does not appear in the list.) In summary, our rough idea is to continue searching down the list as long as there are more names to be investigated and the target name is greater than the name currently being considered.

In our pseudocode, this process can be represented as

Select the first entry in the list as TestEntry. while (TargetValue > TestEntry and entries remain):

Select the next entry in the list as TestEntry

Upon terminating this while structure, one of two conditions will be true; Either the target value has been found or the target value is not in the list. In either case we can detect a successful search by comparing the test entry to the target value. If they are equal, the search has been successful. Thus, we add the statement

if (TargetValue == TestEntry):

Declare the search a success.

else:

Declare the search a failure.

to the end of our pseudocode routine.

Finally, we observe that the first statement in our routine, which selects the first entry in the list as the test entry, is based on the assumption that the list in question contains at least one entry. We might reason that this is a safe guess, but just to be sure, we can position our routine as the else option of the statement

if (List is empty):

Declare search a failure. else:

. . .


This produces the function shown in Figure 82. Note that this function can be used from within other functions by using statements such as

Search() the passenger list using Darrel Baker as the target value.

to find out if Darrel Baker is a passenger and

Copyright Virtual University of Pakistan

Search() the list of ingredients using nutmeg as the target value. to find out if nutmeg appears in the list of ingredients.

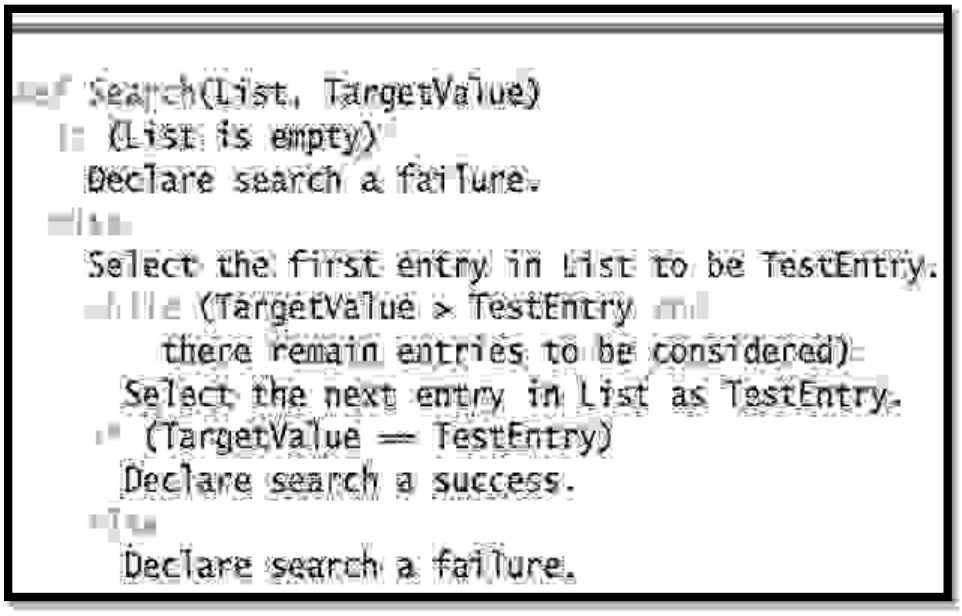

```
Search(List, TargetValue)
  (List is empty)
  Declare search a failure.

  Select the first entry in List to be TestEntry.
  While (TargetValue > TestEntry
     there remain entries to be considered)
    Select the next entry in List as TestEntry.
    (TargetValue == TestEntry)
    Declare search a success.

    Declare search a failure.
```

Figure 82: The sequential search algorithm in pseudocode

Copyright Virtual University of Pakistan

Module 97

97. Algorithm: Iterative Structures (Loop Control)

The repetitive use of an instruction or sequence of instructions is an important algorithmic concept. One method of implementing such repetition is the iterative structure known as the **loop,** in which a collection of instructions, called the **body** of the loop, is executed in a repetitive fashion under the direction of some control process. A typical example is found in the sequential search algorithm represented in Figure 82. Here we use a while statement to control the repetition of the single statement **Select the next entry in List as the TestEntry**. Indeed, the while statement.

while (condition):

Body

exemplifies the concept of a loop structure in that its execution traces the cyclic pattern

check the condition.

execute the body.

check the condition.

execute the body.

.

.

.

check the condition.

until the condition fails.

As a general rule, the use of a loop structure produces a higher degree of flexibility that would be obtained merely by explicitly writing the body several times. For example, to execute the statement

Add a drop of sulfuric acid, three times, we could write:

Add a drop of sulfuric acid. Add a drop of sulfuric acid. Add a drop of sulfuric acid.

But we cannot produce a similar sequence that is equivalent to the loop structure.

while (the pH level is greater than 4):

add a drop of sulfuric acid

because we do not know in advance how many drops of acid will be required.

Let us now take a closer look at the composition of loop control. You might be tempted to view this part of a loop structure as having minor importance. After all, it is typically the body of the loop that actually performs the task at hand (for example, adding drops of acid)—the control activities appear merely as the overhead involved because we chose to execute the body in a repetitive fashion. However, experience has shown that the control of a loop is the more error-prone part of the structure and therefore deserves our attention.

Copyright Virtual University of Pakistan

Module 98

98. Algorithm: Iterative Structures (Components of Repetitive Control)

The control of a loop consists of the three activities initialize, test, and modify (Figure 83), with the presence of each being required for successful loop control. The test activity has the obligation of causing the termination of the looping process by watching for a condition that indicates termination should take place. This condition is known as the **termination condition.** It is for the purpose of this test activity that we provide a condition within each while statement of our pseudocode. In the case of the while statement, however, the condition stated is the condition under which the body of the loop should be executed—the termination condition is the negation of the condition appearing in the while structure.

Thus, in the statement

while (the pH level is greater than 4): add a drop of sulfuric acid

the termination condition is "the pH level is *not* greater than 4," and in the while

statement of Figure 82, the termination condition could be stated as

(TargetValue <= TestEntry) or (there are no more entries to be considered)

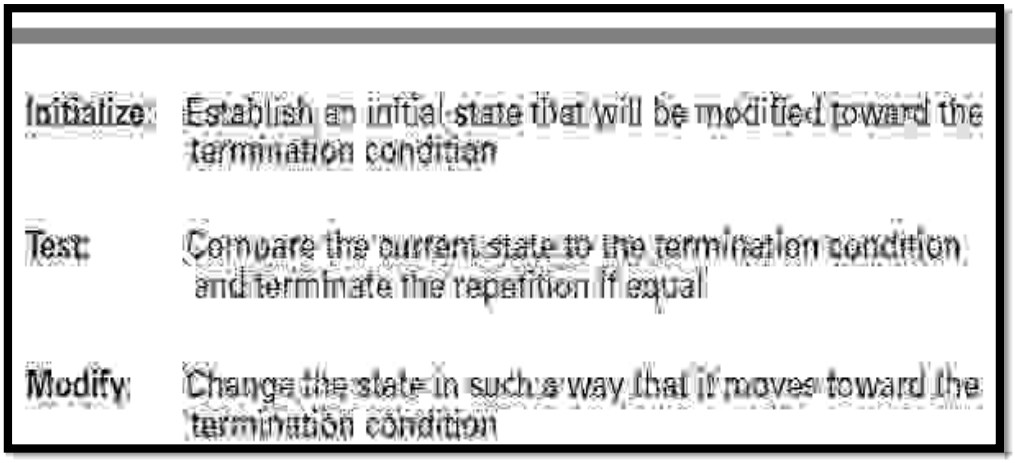


Figure 83: Components of repetitive control

The other two activities in the loop control ensure that the termination condition will ultimately occur. The initialization step establishes a starting condition, and the modification step moves this condition toward the termination condition. For instance, in Figure 82, initialization takes place in the statement preceding the while statement, where the current test entry is established as the first list entry. The modification step in this case is actually accomplished within the loop body, where our position of interest (identified by the test entry) is moved towards the end of the list. Thus, having executed the initialization step, repeated application of the modification step results in the termination condition being reached. (Either we will reach a test entry that is greater than or equal to the target value or we ultimately reach the end of the list.)

Copyright Virtual University of Pakistan

Module 99

99. Algorithm: Iterative Structures: Loop Execution (Examples-1)

Let's write a pseudo-code for finding maximum number from a list. Let's assume the following numbers



def FindMax():

max = first number in the list

Current = second number in the list

While (elements in the list exist)

If (max<current)

max=current

Current = next value in the list

This function will keep on going until we reach at the last value (45) each time, the Max would be compared with the current value. As soon as the max remains small than the compared value, the value in comparison will be given to the max.

Copyright Virtual University of Pakistan

Module 100

100. Algorithm: Iterative Structures: Loop Execution (Examples-II)

Let's write a pseudo-code to find a factorial of a number n.

```
def FindFactorial():
f = 1
i=1;
While (i<=n)
f=f*i;
i=i+1;
```

Initially "f" and "i" both will have a value of one. The loop will keep executing until "i" remains smaller or equal to n. In each iteration of "i", the current value of "i" will be multiplied with the current value of f.

Let's execute it for n=5:

f=1

i=1

First iteration

f= f * I

f=1

i=2

Second iteration

f= f * I

f=2

i=3

Third iteration

f= f * I

f=6

i=4

Forth Iteration

f= f * I

f=24

Copyright Virtual University of Pakistan

i=5

Fifth Iteration

f= f * I

f=120

i=6

when “i” is 6, the loop will terminate as the condition is now false (i<=n)

Copyright Virtual University of Pakistan

Module 101

101. Algorithm: Iterative Structures (Pretest and Posttest loops)

Following the terminology of our pseudocode, we will usually refer to these structures as the while loop structure or the repeat loop structure. In a more generic context you might hear the while loop structure referred to as a **pretest loop** (since the test for termination is performed before the body is executed) and the repeat loop structure referred to as a **posttest loop** (since the test for termination is performed after the body is executed). This has been shown the Figure 84.

a. Pretest b. Posttest

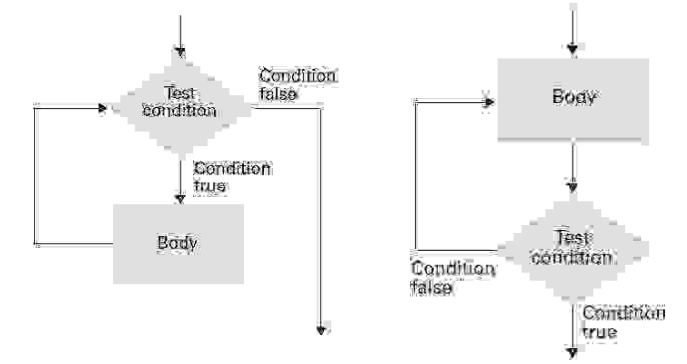


Figure 84: Pretest and Posttest loop

Copyright Virtual University of Pakistan

Module 102

102. Algorithm: Insertion Sort Algorithm

As an additional example of using iterative structures, let us consider the problem of sorting a list of names into alphabetical order. But before proceeding, we should identify the constraints under which we will work. Simply stated, our goal is to sort the list "within itself." In other words, we want to sort the list by shuffling its entries as opposed to moving the list to another location. Our situation is analogous to the problem of sorting a list whose entries are recorded on separate index cards spread out on a crowded desktop. We have cleared off enough space for the cards but are not allowed to push additional materials back to make more room. This restriction is typical in computer applications, not because the workspace within the machine is necessarily crowded like our desktop, but simply because we want to use the storage space available in an efficient manner.

Let us get a foot in the door by considering how we might sort the names on the desktop. Consider the list of names

Fred

Alex

Diana

Byron

Carol

One approach to sorting this list is to note that the sublist consisting of only the top name, Fred, is sorted but the sublist consisting of the top two names, Fred and Alex, is not. Thus we might pick up the card containing the name Alex, slide the name Fred down into the space where Alex was, and then place the name Alex in the hole at the top of the list. This example will continue in the next module.

Copyright Virtual University of Pakistan

Module 103

103. Algorithm: Insertion Sort Algorithm Example

One approach to sorting this list is to note that the sublist consisting of only the top name, Fred, is sorted but the sublist consisting of the top two names, Fred and Alex, is not. Thus we might pick up the card containing the name Alex, slide the name Fred down into the space where Alex was, and then place the name Alex in the hole at the top of the list as represented by the first row in Figure 85. At this point our list would be

Alex

Fred

Diana

Byron

Carol

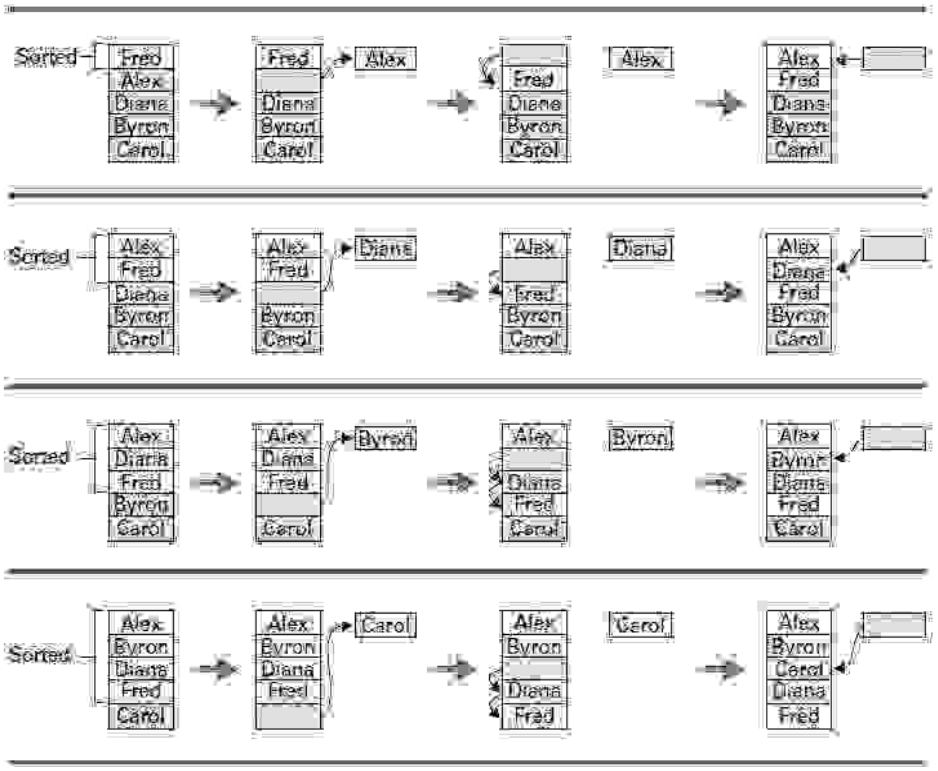


Figure 85: Sorting the list Fred, Alex, Diana, Byron, and Carol alphabetically

Now the top two names form a sorted sublist, but the top three do not. Thus, we might pick up the third name, Diana, slide the name Fred down into the hole where Diana was, and then insert Diana in the hole left by Fred, as summarized in the second row of Figure 5.10. The top three entries in the list would now be sorted. Continuing in this fashion, we could obtain a list in which the top four entries are sorted by picking up the fourth name, Byron, sliding the names Fred and Diana down, and then inserting Byron in the hole (see the third row of Figure 5.10). Finally, we can complete the sorting process by picking up Carol, sliding Fred and Diana down, and then inserting Carol in the remaining hole (see the fourth row of Figure 85).

Copyright Virtual University of Pakistan

Module 104

104. Algorithm: Recursive Structure (The Binary Search Algorithm)

Recursive structures provide an alternative to the loop paradigm for implementing the repetition of activities. Whereas a loop involves repeating a set of instructions in a manner in which the set is completed and then repeated, recursion involves repeating the set of instructions as a subtask of itself. As an analogy, consider the process of conducting telephone conversations with the call waiting feature. There, an incomplete telephone conversation is set aside while another incoming call is processed. The result is that two conversations take place. However, they are not performed one-after-the-other as in a loop structure, but instead one is performed within the other.

As a way of introducing recursion, let us again tackle the problem of searching to see whether a particular entry is in a sorted list, but this time we get our foot in the door by considering the procedure we follow when searching a dictionary. In this case we do not perform a sequential entry-by-entry or even a page-by-page procedure. Rather, we begin by opening the directory to a page in the area where we believe the target entry is located. If we are lucky, we will find the target value there; otherwise, we must continue searching. But at this point we will have narrowed our search considerably.

Of course, in the case of searching a dictionary, we have prior knowledge of where words are likely to be found. If we are looking for the word somnambulism, we would start by opening to the latter portion of the dictionary. In the case of generic lists, however, we do not have this advantage, so let us agree to always start our search with the "middle" entry in the list. Here we write the word middle in quotation marks because the list might have an even number of entries and thus no middle entry in the exact sense. In this case, let us agree that the "middle" entry refers to the first entry in the second half of the list. If the middle entry in the list is the target value, we can declare the search a success. Otherwise, we can at least restrict the search process to the first or last half of the list depending on whether the target value is less than or greater than the entry we have considered. (Remember that the list is sorted.)

To search the remaining portion of the list, we could apply the sequential search, but instead let us apply the same approach to this portion of the list that we used for the whole list. That is, we select the middle entry in the remaining portion of the list as the next entry to consider. As before, if that entry is the target value, we are finished. Otherwise we can restrict our search to an even smaller portion of the list.

This approach to the searching process is summarized in Figure 86, where we consider the task of searching the list on the left of the figure for the entry John. We first consider the middle entry Harry. Since our target belongs after this entry, the search continues by considering the lower half of the original list. The middle of this sublist is found to be Larry. Since our target should precede Larry, we turn our attention to the first half of the current sublist. When we interrogate the middle of that secondary sublist, we find our target John and declare the search a success. In short, our strategy is to successively divide the list in question into smaller segments until the target is found or the search is narrowed to an empty segment.

Copyright Virtual University of Pakistan

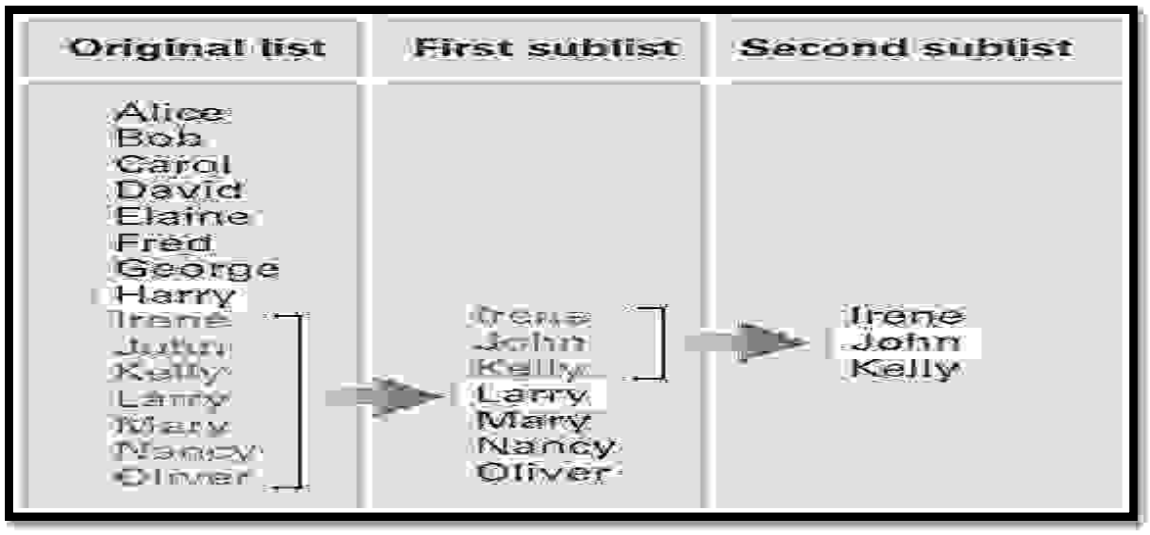


Figure 86: Applying our strategy to search a list for the entry John

We need to emphasize this last point. If the target value is not in the original list, our approach to searching the list will proceed by dividing the list into smaller segments until the segment under consideration is empty. At this point our algorithm should recognize that the search is a failure.

Figure 87 is a first draft of our thoughts using our pseudocode. It directs us to begin a search by testing to see if the list is empty. If so, we are told to report that the search is a failure. Otherwise, we are told to consider the middle entry in the list. If this entry is not the target value, we are told to search either the front half or the back half of the list. Both of these possibilities require a secondary search. It would be nice to perform these searches by calling on the services of an abstract tool. In particular, our approach is to apply a function named Search to carry out these secondary searches. To complete our program, therefore, we must provide such a function.

```
If (List is empty)
 Report that the search failed.
Else
 TestEntry = the "middle" entry in the List
 If (TargetValue == TestEntry)
   Report that the search succeeded.
 If (TargetValue < TestEntry)
   Search() the portion of List preceding TestEntry for TargetValue,
     and report the result of that search.
 If (TargetValue > TestEntry)
   Search() the portion of List following TestEntry for TargetValue,
     and report the result of that search.
```

Figure 87: A first draft of the binary search technique

But this function should perform the same task that is expressed by the pseudocode we have already written. It should first check to see if the list it is given is empty, and if it is not, it should proceed by considering the middle entry of that list. Thus we can supply the function we need merely by identifying the current routine as being the function named Search and inserting references to that function where the secondary searches are required. The result is shown in Figure 88.

Copyright Virtual University of Pakistan

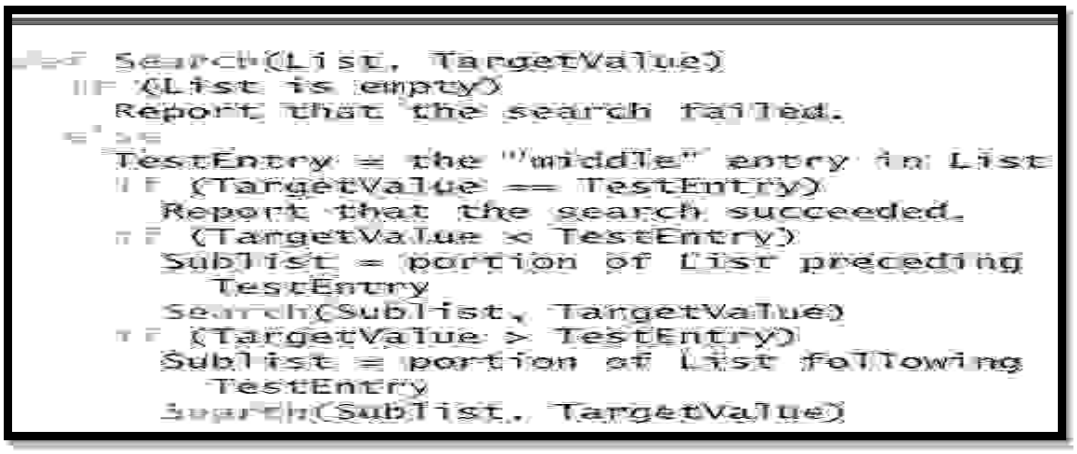


Figure 88: The binary search algorithm in pseudocode

Copyright Virtual University of Pakistan

Module 105

105. Algorithm: Recursive Control

The binary search algorithm is similar to the sequential search in that each algorithm requests the execution of a repetitive process. However, the implementation of this repetition is significantly different. Whereas the sequential search involves a circular form of repetition, the binary search executes each stage of the repetition as a subtask of the previous stage. This technique is known as **recursion.**

As we have seen, the illusion created by the execution of a recursive function is the existence of multiple copies of the function, each of which is called an activation of the function. These activations are created dynamically in a telescoping manner and ultimately disappear as the algorithm advances. Of those activations existing at any given time, only one is actively progressing. The others are effectively in limbo, each waiting for another activation to terminate before it can continue.

Being a repetitive process, recursive systems are just as dependent on proper control as are loop structures. Just as in loop control, recursive systems are dependent on testing for a termination condition and on a design that ensures this condition will be reached. In fact, proper recursive control involves the same three ingredients such as: initialization, modification, and test for termination – that are required in loop control.

In general, a recursive function is designed to test for the termination condition (often called the **base case** or **degenerative case**) before requesting further activations. If the termination condition is not met, the routine creates another activation of the function and assigns it the task of solving a revised problem that is closer to the termination condition than that assigned to the current activation. However, if the termination condition is met, a path is taken that causes the current activation to terminate without creating additional activations.

Let us see how the initialization and modification phases of repetitive control are implemented in our binary search function of Figure 88. In this case, the creation of additional activations is terminated once the target value is found or the task is reduced to that of searching an empty list. The process is initialized implicitly by being given an initial list and a target value. From this initial configuration the function modifies its assigned task to that of searching a smaller list. Since the original list is of finite length and each modification step reduces the length of the list in question, we are assured that the target value ultimately is found, or the task is reduced to that of searching the empty list. We can therefore conclude that the repetitive process is guaranteed to cease.

Copyright Virtual University of Pakistan

Module 106

106. Algorithm: Algorithm Efficiency

Even though today's machines are capable of executing millions or billions of instructions each second, efficiency remains a major concern in algorithm design. Often the choice between efficient and inefficient algorithms can make the difference between a practical solution to a problem and an impractical one.

Let us consider the problem of a university registrar faced with the task of retrieving and updating student records. Although the university has an actual enrollment of approximately 10,000 students during any one semester, its "current student" file contains the records of more than 30,000 students who are considered current in the sense that they have registered for at least one course in the past few years but have not completed a degree. For now, let us assume that these records are stored in the registrar's computer as a list ordered by student identification numbers. To find any student record, the registrar would therefore search this list for a particular identification number.

We have presented two algorithms for searching such a list: the sequential search and the binary search. Our question now is whether the choice between these two algorithms makes any difference in the case of the registrar. We consider the sequential search first.

Given a student identification number, the sequential search algorithm starts at the beginning of the list and compares the entries found to the identification number desired. Not knowing anything about the source of the target value, we cannot conclude how far into the list this search must go. We can say, though, that after many searches we expect the average depth of the searches to be halfway through the list; some will be shorter, but others will be longer. Thus, we estimate that over a period of time, the sequential search will investigate roughly 15,000 records per search. If retrieving and checking each record for its identification number requires 10 milliseconds (10 one-thousandths of a second), such a search would require an average of 150 seconds or 2.5 minutes—an unbearably long time for the registrar to wait for a student's record to appear on a computer screen. Even if the time required to retrieve and check each record were reduced to only 1 millisecond, the search would still require an average of 15 seconds, which is still a long time to wait.

In contrast, the binary search proceeds by comparing the target value to the middle entry in the list. If this is not the desired entry, then at least the remaining search is restricted to only half of the original list. Thus, after interrogating the middle entry in the list of 30,000 student records, the binary search has at most 15,000 records still to consider. After the second inquiry, at most 7,500 remain, and after the third retrieval, the list in question has dropped to no more than 3,750 entries. Continuing in this fashion, we see that the target record will be found after retrieving at most 15 entries from the list of 30,000 records. Thus, if each of these retrievals can be performed in 10 milliseconds, the process of searching for a particular record requires only 0.15 of a second—meaning that access to any particular student record will appear to be instantaneous from the registrar's point of view. We conclude that the choice between the sequential search algorithm and the binary search algorithm would have a significant impact in this application.

This example indicates the importance of the area of computer science known as algorithm analysis that encompasses the study of the resources, such as time or storage space, that algorithms require. A major application of such studies is the evaluation of the relative merits of alternative algorithms. Algorithm analysis often involves best-case, worst-case, and average-case scenarios. In our example, we performed an average-case analysis of the sequential search algorithm and a worst-case analysis of the binary search algorithm in order to estimate the time required to search through a list of 30,000 entries. In general such analysis is performed in a more generic context. That is, when considering algorithms for searching lists, we do not focus on a list of a particular length, but instead try to identify a formula that would indicate the algorithm's performance for lists of arbitrary lengths. It is not difficult to generalize our previous reasoning to lists of arbitrary lengths. In particular, when applied to a list with *n* entries, the sequential search

Copyright Virtual University of Pakistan

algorithm will interrogate an average of $n/2$ entries, whereas the binary search algorithm will interrogate at most $log_2 n$ entries in its worst-case scenario. ($log_2 n$ represents the base two logarithm of n. Unless otherwise stated, computer scientists usually mean base two when talking about logarithms.

Copyright Virtual University of Pakistan

Module 107

107. Algorithm: Software Verification

Recall that the fourth phase in Polya's analysis of problem solving (module 92) is to evaluate the solution for accuracy and for its potential as a tool for solving other problems. The significance of the first part of this phase is exemplified by the following example:

"A traveler with a gold chain of seven links must stay in an isolated hotel for seven nights. The rent each night consists of one link from the chain. What is the fewest number of links that must be cut so that the traveler can pay the hotel one link of the chain each morning without paying for lodging in advance?"

To solve this problem, we first realize that not every link in the chain must be cut. If we cut only the second link, we could free both the first and second links from the other five. Following this insight, we are led to the solution of cutting only the second, fourth, and sixth links in the chain, a process that releases each link while cutting only three (Figure 89). Furthermore, any fewer cuts leaves two links connected, so we might conclude that the correct answer to our problem is three.

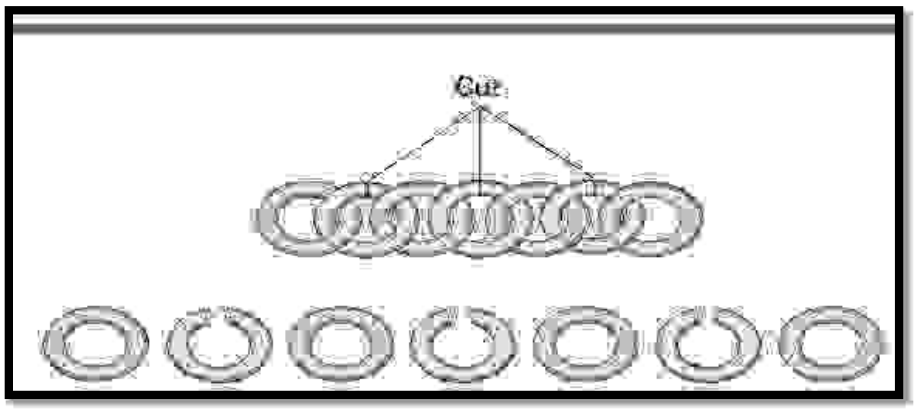


Figure 89: Separating the chain using only three cuts

Upon reconsidering the problem, however, we might make the observation that when only the third link in the chain is cut, we obtain three pieces of chain of lengths one, two, and four (Figure 90). With these pieces we can proceed as follows:

First morning: Give the hotel the single link.

Second morning: Retrieve the single link and give the hotel the two-link piece.

Third morning: Give the hotel the single link.

Fourth morning: Retrieve the three links held by the hotel and give the hotel the four-link piece.

Fifth morning: Give the hotel the single link.

Sixth morning: Retrieve the single link and give the hotel the double-link piece.

Seventh morning: Give the hotel the single link

Copyright Virtual University of Pakistan

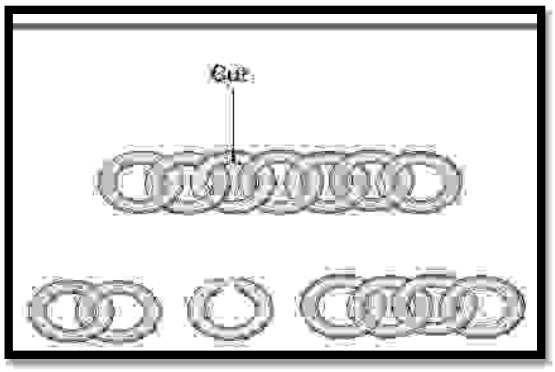


Figure 90: Solving the problem with only one cut

Consequently, our first answer, which we thought was correct, is incorrect. How, then, can we be sure that our new solution is correct? We might argue as follows: Since a single link must be given to the hotel on the first morning, at least one link of the chain must be cut, and since our new solution requires only one cut, it must be optimal.

Translated into the programming environment, this example emphasizes the distinction between a program that is believed to be correct and a program that is correct. The two are not necessarily the same. The data processing community is rich in horror stories involving software that although "known" to be correct, still failed at a critical moment because of some unforeseen situation. Verification of software is therefore an important undertaking, and the search for efficient verification techniques constitutes an active field of research in computer science.

Copyright Virtual University of Pakistan

Module 108

108. Algorithm: Software Verification Examples

Software Verification?

- ✓ Distinction between Program believed to be correct and the program that is correct.

Example #1 – Software Failure

- ✓ Fatal Therac-25 X-ray Radiation
- ✓ In 1986, a man in Texas received between 16,500-25,000 radiations in less than 10 sec, over an area of about 1 cm.
- ✓ He passed away 5 months later.
- ✓ The root cause of the incident was a SW failure

Example #2 – Welsch NHS IT Failure

- ✓ In 2018, doctors and staff were unable to access patients files in UK.
- ✓ This was a technical issue of software not the security issue.
- ✓ Hospitals and GP surgeries were affected.

Module 109

109. Programming Languages: Early Generations-I

As we learned in Figure 46, programs for modern computers consist of sequences of instructions that are encoded as numeric digits. Such an encoding system is known as a machine language. Unfortunately, writing programs in a machine language is a tedious task that often leads to errors that must be located and corrected (a process known as **debugging**) before the job is finished.

In the 1940s, researchers simplified the programming process by developing notational systems by which instructions could be represented in mnemonic rather than numeric form. For example, the instruction move the contents of register 5 to register 6 would be expressed as:

4056

using the machine language introduced in Figure 46, whereas in a mnemonic system it might appear as:

MOV R5, R6

As a more extensive example, the machine language routine

156C
166D
5056
306E
C000

which adds the contents of memory cells 6C and 6D and stores the result at location 6E (Figure 46) might be expressed as

LD R5,Price
LD R6, ShippingCharge
ADDI R0,R5 R6
ST R0,TotalCost
HLT

using mnemonics. (Here we have used LD, ADDI, ST, and HLT to represent *load*, *add*, *store*, and *halt*. Moreover, we have used the descriptive names Price, ShippingCharge, and TotalCost to refer to the memory

Copyright Virtual University of Pakistan

cells at locations 6C, 6D, and 6E, respectively. Such descriptive names are often called program variables or **identifiers.**) Note that the mnemonic form, although still lacking, does a better job of representing the meaning of the routine than does the numeric form.

Copyright Virtual University of Pakistan

Module 110

110. Programming Languages: Early Generations-II

In the continuation of the previous module.

Once such a mnemonic system was established, programs called **assemblers** were developed to convert mnemonic expressions into machine language instructions. Thus, rather than being forced to develop a program directly in machine language, a human could develop a program in mnemonic form and then have it converted into machine language by means of an assembler.

A mnemonic system for representing programs is collectively called an **assembly language.** At the time assembly languages were first developed, they represented a giant step forward in the search for better programming techniques. In fact, assembly languages were so revolutionary that they became known as second-generation languages, the first generation being the machine languages themselves.

Although assembly languages have many advantages over their machine language counterparts, they still fall short of providing the ultimate programming environment. After all, the primitives used in an assembly language are essentially the same as those found in the corresponding machine language. The difference is simply in the syntax used to represent them. Thus, a program written in an assembly language is inherently machine dependent – that is, the instructions within the program are expressed in terms of a particular machine's attributes. In turn, a program written in assembly language cannot be easily transported to another computer design because it must be rewritten to conform to the new computer's register configuration and instruction set.

Another disadvantage of an assembly language is that a programmer, although not required to code instructions in numeric form, is still forced to think in terms of the small, incremental steps of the machine's language. The situation is analogous to designing a house in terms of boards, nails, bricks, and so on. It is true that the actual construction of the house ultimately requires a description based on these elementary pieces, but the design process is easier if we think in terms of larger units such as rooms, windows, doors, and so on.

In short, the elementary primitives in which a product must ultimately be constructed are not necessarily the primitives that should be used during the product's design. The design process is better suited to the use of high-level primitives, each representing a concept associated with a major feature of the product. Once the design is complete, these primitives can be translated to lower-level concepts relating to the details of implementation.

Following this philosophy, computer scientists began developing programming languages that were more conducive to software development than were the low-level assembly languages. The result was the emergence of a third generation of programming languages that differed from previous generations in that their primitives were both higher level (in that they expressed instructions in larger increments) and **machine independent** (in that they did not rely on the characteristics of a particular machine). The best-known early examples are FORTRAN (FORmula TRANslator), which was developed for scientific and engi- neering applications, and COBOL (COmmon Business-Oriented Language), which was developed by the U.S. Navy for business applications.

In general, the approach to third-generation programming languages was to identify a collection of high-level primitives in which software could be developed. Each of these primitives was designed so that it could be implemented as a sequence of the low-level primitives available in machine languages. For example, the statement

assign TotalCost the value Price + ShippingCharge

Copyright Virtual University of Pakistan

expresses a high-level activity without reference to how a particular machine should perform the task, yet it can be implemented by the sequence of machine instructions discussed earlier. Thus, our pseudocode structure

identifier = expression

is a potential high-level primitive.

Once this collection of high-level primitives had been identified, a program, called a **translator,** was written that translated programs expressed in these high-level primitives into machine-language programs. Such a translator was similar to the second-generation assemblers, except that it often had to compile several machine instructions into short sequences to simulate the activity requested by a single high-level primitive. Thus, these translation programs were often called **compilers.**

An alternative to translators, called **interpreters,** emerged as another means of implementing third-generation languages. These programs were similar to translators except that they executed the instructions as they were translated instead of recording the translated version for future use. That is, rather than producing a machine-language copy of a program that would be executed later, an interpreter actually executed a program from its high-level form.

As a side issue, we should note that the task of promoting third-generation programming languages was not as easy as might be imagined. The thought of writing programs in a form similar to a natural language was so revolutionary that many in managerial positions fought the notion at first. Grace Hopper, who is recognized as the developer of the first compiler, often told the story of demonstrating a translator for a third-generation language in which German terms, rather than English, were used. The point was that the programming language was constructed around a small set of primitives that could be expressed in a variety of natural languages with only simple modifications to the translator. But she was surprised to find that many in the audience were shocked that, in the years surrounding World War II, she would be teaching a computer to "understand" German. Today we know that understanding a natural language involves much, much more than responding to a few rigorously defined primitives. Indeed, **natural languages** (such as English, German, and Latin) are distinguished from **formal languages** (such as programming languages) in that the latter are precisely defined by grammars, whereas the former evolved over time without formal grammatical analysis.

Copyright Virtual University of Pakistan

Module 111

111. Programming Languages: Machine Independence

With the development of third-generation languages, the goal of machine independence was largely achieved. Since the statements in a third-generation language did not refer to the attributes of any particular machine, they could be compiled as easily for one machine as for another. A program written in a third-generation language could theoretically be used on any machine simply by applying the appropriate compiler.

Reality, however, has not proven to be this simple. When a compiler is designed, particular characteristics of the underlying machine are sometimes reflected as conditions on the language being translated. For example, the different ways in which machines handle I/O operations have historically caused the "same" language to have different characteristics, or dialects, on different machines. Consequently, it is often necessary to make at least minor modifications to a program to move it from one machine to another.

Compounding this problem of portability is the lack of agreement in some cases as to what constitutes the correct definition of a particular language. To aid in this regard, the American National Standards Institute and the International Organization for Standardization have adopted and published standards for many of the popular languages. In other cases, informal standards have evolved because of the popularity of a certain dialect of a language and the desire of other compiler writers to produce compatible products. However, even in the case of highly standardized languages, compiler designers often provide features, sometimes called language extensions, that are not part of the standard version of the language. If a programmer takes advantage of these features, the program produced will not be compatible with environments using a compiler from a different vendor. In the overall history of programming languages, the fact that third-generation languages fell short of true machine independence is actually of little significance for two reasons. First, they were close enough to being machine independent that software could be transported from one machine to another with relative ease. Second, the goal of machine independence turned out to be only a seed for more demanding goals. Indeed, the realization that machines could respond to such high-level statements as

assign TotalCost the value Price + ShippingCharge

led computer scientists to dream of programming environments that would allow humans to communicate with machines in terms of abstract concepts rather than forcing them to translate these concepts into machine-compatible form.

Moreover, computer scientists wanted machines that could perform much of the algorithm discovery process rather than just algorithm execution. The result has been an ever-expanding spectrum of programming languages that challenges a clear-cut classification in terms of generations.

Copyright Virtual University of Pakistan

Module 112

112. Programming Languages: Imperative Paradigms

The generation approach to classifying programming languages is based on a linear scale (Figure 91) on which a language's position is determined by the degree to which the user of the language is freed from the world of computer gibberish and allowed to think in terms associated with the problem being solved. In reality, the development of programming languages has not progressed in this manner but has developed along different paths as alternative approaches to the programming process (called **programming paradigms**) have surfaced and been pursued. Consequently, the historical development of programming languages is better represented by a multiple-track diagram as shown in Figure 92, in which different paths resulting from different paradigms are shown to emerge and progress independently. In particular, the figure presents four paths representing the functional, object-oriented, imperative, and declarative paradigms, with various languages associated with each paradigm positioned in a manner that indicates their births relative to other languages. (It does not imply that one language necessarily evolved from a previous one.)

We should note that although the paradigms identified in Figure 92 are called *programming* paradigms, these alternatives have ramifications beyond the programming process. They represent fundamentally different approaches to building solutions to problems and therefore affect the entire software development process. In this sense, the term *programming paradigm* is a misnomer. A more realistic term would be *software development paradigm*.

The **imperative paradigm,** also known as the **procedural paradigm,** represents the traditional approach to the programming process. It is the paradigm on which Python and our pseudocode are based as well as the machine language. As the name suggests, the imperative paradigm defines the programming process to be the development of a sequence of commands that, when followed, manipulate data to produce the desired result. Thus, the imperative paradigm tells us to approach the programming process by finding an algorithm to solve the problem at hand and then expressing that algorithm as a sequence of commands.

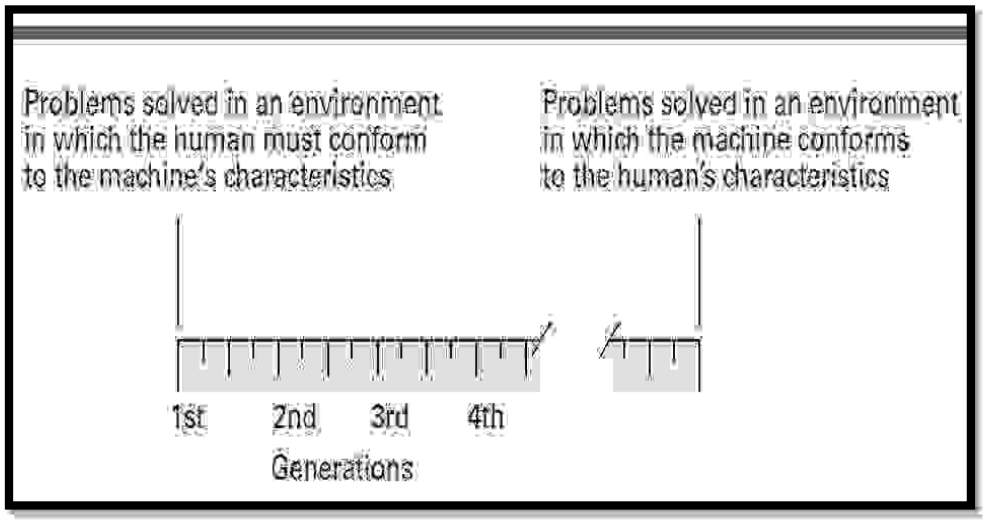


Figure 91: Generations of programming languages

Copyright Virtual University of Pakistan

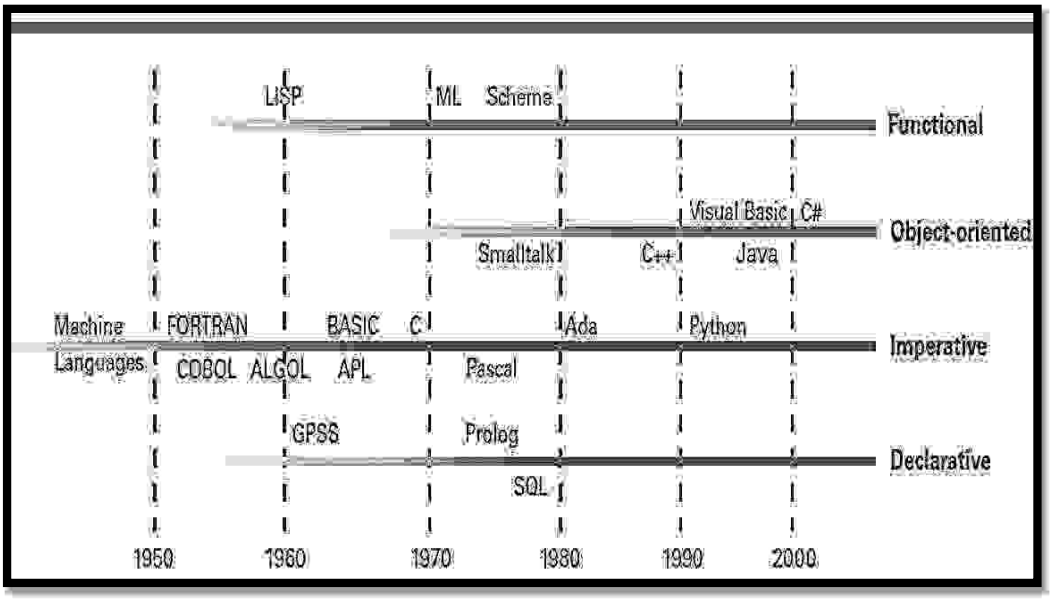


Figure 92: The evolution of programming paradigms

Copyright Virtual University of Pakistan

Module 113

113. Programming Languages: Declarative Paradigms

In contrast to the imperative paradigm is the **declarative paradigm,** which asks a programmer to describe the problem to be solved rather than an algorithm to be followed. More precisely, a declarative programming system applies a pre-established general-purpose problem-solving algorithm to solve problems presented to it. In such an environment the task of a programmer becomes that of developing a precise statement of the problem rather than of describing an algorithm for solving the problem.

A major obstacle in developing programming systems based on the declarative paradigm is the need for an underlying problem-solving algorithm. For this reason, early declarative programming languages tended to be special-purpose in nature, designed for use in particular applications. For example, the declarative approach has been used for many years to simulate a system (political, economic, environmental, and so on) in order to test hypotheses or to obtain predictions. In these settings, the underlying algorithm is essentially the process of simulating the passage of time by repeatedly re-computing values of parameters (gross domestic product, trade deficit, and so on) based on the previously computed values. Thus, implementing a declarative language for such simulations requires that one first implement an algorithm that performs this repetitive function. Then the only task required of a programmer using the system is to describe the situation to be simulated. In this manner, a weather forecaster does not need to develop an algorithm for forecasting the weather but merely describes the current weather status, allowing the underlying simulation algorithm to produce weather predictions for the near future.

A tremendous boost was given to the declarative paradigm with the discovery that the subject of formal logic within mathematics provides a simple problem- solving algorithm suitable for use in a general-purpose declarative programming system. The result has been increased attention to the declarative paradigm and the emergence of **logic programming.**

Copyright Virtual University of Pakistan

Module 114

114. Programming Languages: Functional Paradigm

Another programming paradigm is the **functional paradigm.** Under this paradigm a program is viewed as an entity that accepts inputs and produces outputs. Mathematicians refer to such entities as functions, which is the reason this approach is called the functional paradigm. Under this paradigm a program is constructed by connecting smaller predefined program units (predefined functions) so that each unit's outputs are used as another unit's inputs in such a way that the desired overall input-to-output relationship is obtained. In short, the programming process under the functional paradigm is that of building functions as nested complexes of simpler functions.

As an example, Figure 93 shows how a function for balancing your checkbook can be constructed from two simpler functions. One of these, called Find_sum, accepts values as its input and produces the sum of those values as its output. The other, called Find_diff, accepts two input values and computes their difference. The structure displayed in Figure 6.3 can be represented in the LISP programming language (a prominent functional programming language) by the expression

(Find_diff (Find_sum Old_balance Credits) (Find_sum Debits))

The nested structure of this expression (as indicated by parentheses) reflects the fact that the inputs to the function Find_diff are produced by two applications of Find_sum. The first application of Find_sum produces the result of adding all the Credits to the Old_balance. The second application of Find_sum computes the total of all Debits. Then, the function Find_diff uses these results to obtain the new checkbook balance.

To more fully understand the distinction between the functional and imperative paradigms, let us compare the functional program for balancing a checkbook to the following pseudocode program obtained by following the imperative paradigm:

Total_credits = sum of all Credits
Temp_balance = Old_balance + Total_credits
Total_debits = sum of all Debits
Balance = Temp_balance - Total_debits

Copyright Virtual University of Pakistan

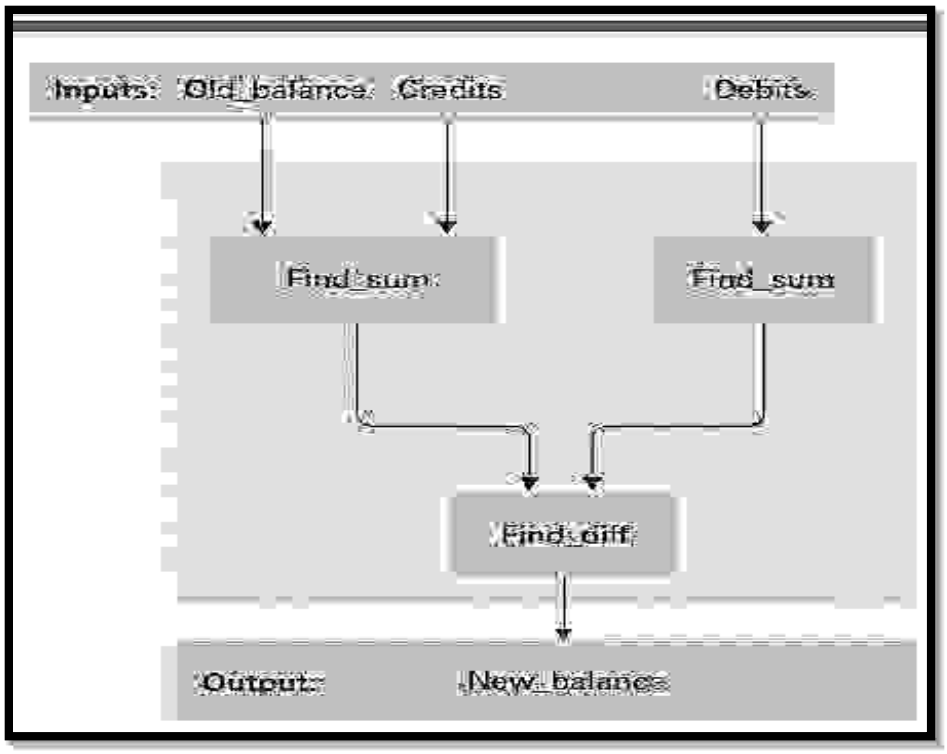


Figure 93: A function for checkbook balancing constructed from simpler functions

Note that this imperative program consists of multiple statements, each of which requests that a computation be performed and that the result be stored for later use. In contrast, the functional program consists of a single statement in which the result of each computation is immediately channeled into the next. In a sense, the imperative program is analogous to a collection of factories, each converting its raw materials into products that are stored in warehouses. From these warehouses, the products are later shipped to other factories as they are needed. But the functional program is analogous to a collection of factories that are coordinated so that each produces only those products that are ordered by other factories and then immediately ships those products to their destinations without intermediate storage. This efficiency is one of the benefits proclaimed by proponents of the functional paradigm.

Copyright Virtual University of Pakistan

Module 115

115. Programming Languages: Object Oriented Paradigm

Another programming paradigm (and the most prominent one in today's software development) is the **object-oriented paradigm,** which is associated with the programming process called **object-oriented programming (OOP).** Following this paradigm, a software system is viewed as a collection of units, called **objects,** each of which is capable of performing the actions that are immediately related to itself as well as requesting actions of other objects. Together, these objects interact to solve the problem at hand.

As an example of the object-oriented approach at work, consider the task of developing a graphical user interface. In an object-oriented environment, the icons that appear on the screen would be implemented as objects. Each of these objects would encompass a collection of functions (called **methods** in the object-oriented vernacular) describing how that object is to respond to the occurrence of various events, such as being selected by a click of the mouse button or being dragged across the screen by the mouse. Thus, the entire system would be constructed as a collection of objects, each of which knows how to respond to the events related to it.

To contrast the object-oriented paradigm with the imperative paradigm, consider a program involving a list of names. In the traditional imperative paradigm, this list would merely be a collection of data. Any program unit accessing the list would have to contain the algorithms for performing the required manipulations. In the object-oriented approach, however, the list would be constructed as an object that consisted of the list together with a collection of methods for manipulating the list. (This might include functions for inserting a new entry in the list, deleting an entry from the list, detecting if the list is empty, and sorting the list.) In turn, another program unit that needed to manipulate the list would not contain algorithms for performing the pertinent tasks. Instead, it would make use of the functions provided in the object. In a sense, rather than sorting the list as in the imperative paradigm, the program unit would ask the list to sort itself. Its significance in today's software development arena dictates that we include the concept of a class in this introduction. To this end, recall that an object can consist of data (such as a list of names) together with a collection of methods for per- forming activities (such as inserting new names in the list). These features must be described by statements in the written program. This description of the object's properties is called a **class.** Once a class has been constructed, it can be applied anytime an object with those characteristics is needed. Thus, several objects can be based on (that is, built from) the same class. Just like identical twins, these objects would be distinct entities but would have the same characteristics because they are constructed from the same template (the same class). (An object that is based on a particular class is said to be an **instance** of that class.)

Copyright Virtual University of Pakistan

Module 116

116. Programming Languages: Variable and Data Types

High-level programming languages allow locations in main memory to be referenced by descriptive names rather than by numeric addresses. Such a name is known as a **variable,** in recognition of the fact that by changing the value stored at the location, the value associated with the name changes as the program executes. Unlike Python, our example languages in this chapter require that variables be identified via a declarative statement prior to being used elsewhere in the program. These declarative statements also require that the programmer describe the type of data that will be stored at the memory location associated with the variable.

Such a type is known as a **data type** and encompasses both the manner in which the data item is encoded and the operations that can be performed on that data. For example, the type **integer** refers to numeric data consisting of whole numbers, probably stored using two's complement notation. Operations that can be performed on integer data include the traditional arithmetic operations and comparisons of relative size, such as determining whether one value is greater than another. The type **float** (sometimes called **real**) refers to numeric data that might contain values other than whole numbers, probably stored in floating-point notation. Operations performed on data of type float are similar to those performed on data of type integer. Recall, however, that the activity required for adding two items of type float differs from that for adding two items of type integer.

Suppose, then, that we wanted to use the variable WeightLimit in a program to refer to an area of main memory containing a numeric value encoded in two's complement notation. In the languages C, C++, Java, and C# we would declare our intention by inserting the statement

int WeightLimit;

toward the beginning of the program. This statement means "The name WeightLimit will be used later in the program to refer to a memory area containing a value stored in two's complement notation." Multiple variables of the same type can normally be declared in the same declaration statement. For example, the statement

int Height, Width;

would declare both Height and Width to be variables of type integer. Moreover, most languages allow a variable to be assigned an initial value when it is declared. Thus,

int WeightLimit = 100;

would not only declare WeightLimit to be a variable of type integer but also assign it the starting value 100. In contrast, dynamically typed languages like Python allow variables to be assigned without first declaring their type; such variables are checked for correct type later, when operations are performed upon them.

Other common data types include character and Boolean. The type character refers to data consisting of symbols, probably stored using ASCII or Unicode. Operations performed on such data include comparisons such as determining whether one symbol occurs before another in alphabetical order, testing to see whether one string of symbols appears inside another, and concatenating one string of symbols at the end of another to form one long string. The statement

char Letter, Digit;

could be used in the languages C, C++, C#, and Java to declare the variables

Letter and Digit to be of type character.

Copyright Virtual University of Pakistan

The type **Boolean** refers to data items that can take on only the values true or false. Operations on data of type Boolean include inquiries as to whether the current value is true or false. For example, if the variable LimitExceeded was declared to be of type Boolean, then a statement of the form

if (LimitExceeded) then (...) else (...)

would be reasonable.

The data types that are included as primitives in a programming language, such as int for integer and char for character, are called **primitive data types.** As we have learned, the data types such as: integer, float, character, and boolean are common primitives. Other data types that have not yet become widespread primitives include images, audio, video, and hypertext. However, types such as GIF, JPEG, and HTML might soon become as common as integer and float.

Copyright Virtual University of Pakistan

Module 117

117. Programming Languages: Data Structure

In addition to data type, variables in a program are often associated with **data structure,** which is the conceptual shape or arrangement of data. For example, text is normally viewed as a long string of characters, whereas sales records might be envisioned as a rectangular table of numeric values, where each row represents the sales made by a particular employee and each column represents the sales made on a particular day.

One common data structure is the **array,** which is a block of elements of the same type such as a one-dimensional list, a two-dimensional table with rows and columns, or tables with higher dimensions. To establish such an array in a program, many programming languages require that the declaration statement declaring the name of the array also specify the length of each dimension of the array. For example, Figure 94 displays the conceptual structure declared by the statement

int Scores[2][9];

in the language C, which means "The variable Scores will be used in the following program unit to refer to a two-dimensional array of integers having two rows and nine columns." The same statement in FORTRAN would be written as

INTEGER Scores (2, 9)

Once an array has been declared, it can be referenced elsewhere in the program by its name, or an individual element can be identified by means of integer values called **indices** that specify the row, column, and so on, desired. However, the range of these indices varies from language to language. For example, in C (and its derivatives C++, Java, and C#) indices start at 0, meaning that the entry in the second row and fourth column of the array called Scores (as declared above) would be referenced by Scores[1][3], and the entry in the first row and first column would be Scores[0][0]. In contrast, indices start at 1 in a FORTRAN program so the entry in the second row and fourth column would be referenced by Scores(2,4) (see again Figure 94).

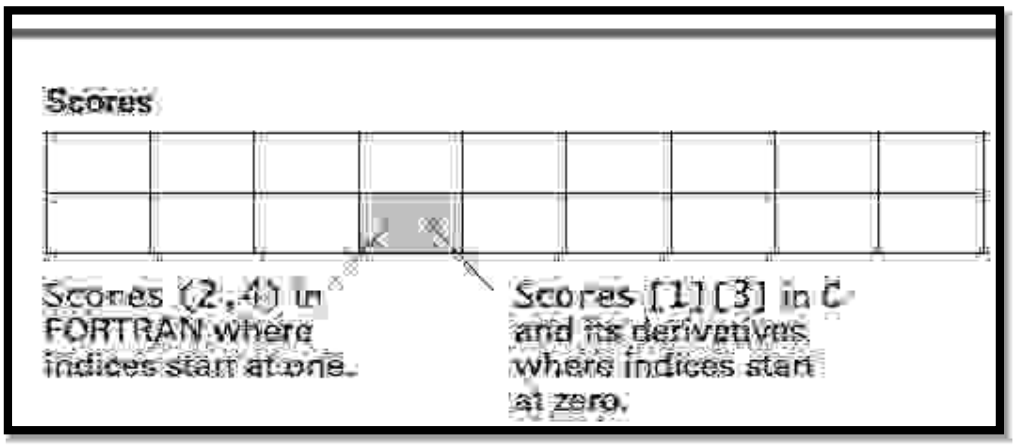


Figure 94: A two-dimensional array with two rows and nine columns

In contrast to an array in which all data items are the same type, an **aggregate type** (also called a **structure,** a **record,** or sometimes a **heterogeneous array**) is a block of data in which different elements can have different types. For instance, a block of data referring to an employee might consist of an entry called Name

Copyright Virtual University of Pakistan

of type character, an entry called Age of type integer, and an entry called SkillRating of type float. Such an aggregate type would be declared in C by the statement

```
struct
{char  Name[25];
int Age;
float SkillRating;
} Employee;
```

which says that the variable Employee is to refer to a structure (abbreviated struct) consisting of three components called Name (a string of 25 characters), Age, and SkillRating (Figure 95). Once such an aggregate has been declared, a programmer can use the structure name (Employee) to refer to the entire aggregate or can reference individual **fields** within the aggregate by means of the structure name followed by a period and the field name (such as Employee.Age).

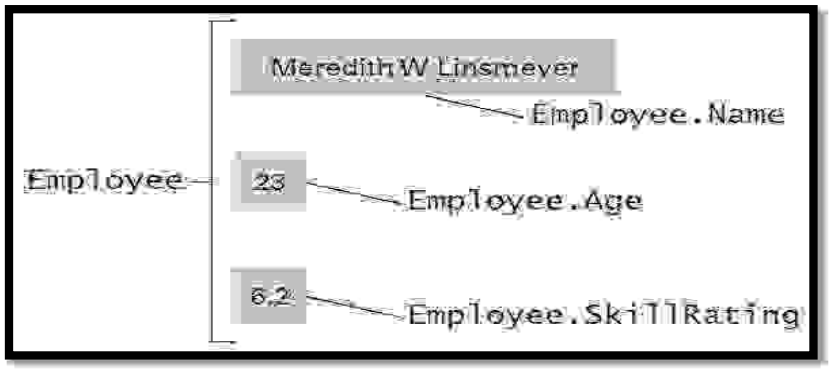


Figure 95: The conceptual layout of the structure Employee

Copyright Virtual University of Pakistan

Module 118

118. Programming Languages: Assignment Statement

Once the special terminology to be used in a program (such as the variables and constants) has been declared, a programmer can begin to describe the algorithms involved. This is done by means of imperative statements. The most basic imperative statement is the **assignment statement,** which requests that a value be assigned to a variable (or more precisely, stored in the memory area identified by the variable). Such a statement normally takes the syntactic form of a variable, followed by a symbol representing the assignment operation, and then by an expression indicating the value to be assigned. The semantics of such a statement is that the expression is to be evaluated and the result stored as the value of the variable. For example, the statement:

Z = X + Y;

in C, C++, C#, and Java requests that the sum of X and Y be assigned to the variable Z. The semicolon at the end of the line, which is used to separate statements in many imperative languages, is the only syntactic difference from an equivalent Python assignment statement. In some other languages (such as Ada) the equiva- lent statement would appear as:

Z := X + Y;

Copyright Virtual University of Pakistan

Module 119

119. Programming Languages: Control Structures (if-statement)

A **control statement** alters the execution sequence of the program. Of all the programming constructs.

if (condition)

StatementA

else

StatementB.

For example, if a student's gets more than or equal to 50 marks, the student passes the examination. To denote this using the if-statement, we will proceed as follow:

if (marks>=50)

You have passed the examination

Else

You have failed the examination

Copyright Virtual University of Pakistan

Module 120

120. Programming Languages: Control Structures (if-statement examples)

In this module, we will learn another example. Suppose a university wants to give a scholarship, if a student gets more than 3.0 CGPA in a given semester. We can write the program in the following way and you have also seen its implementation in the videos in the online compiler.

```
float f=3.5;
if (CGPA>=3.0)
cout<<"Give Scholarship";
else
cout<<"Sorry you do not qualify for the scholarship";
```


Copyright Virtual University of Pakistan

Module 121

121. Programming Languages: Control Structures (Loops)

There is another type of control structure known as loop. The loop control structure iterates a set of instructions based on the provided condition.

Consider the following example, we are interested to print the counting from 1 to 5. One way of doing this is as follows:

```
cout<<"1";
cout<<"2";
cout<<"3";
cout<<"4";
cout<<"5";
```

Doing this using loop is easier, you just need to give one statement that is printing counting and you need to tell that how many times, you want to do it. One can write the loop as follows:

```
int i=1;
while(i<=5)
{
cout<<i;
i=i+1;
}
```

This loop will execute 5 times as follows:

First the value of "i" would be 1. The condition would be checked and based on the condition as true (i<=5 i.e 1<=5), the loop will continue and will print the value of "i" which is 1. Then it will increment the value of "i". The new value of "i" would be 2. Then again condition would be checked, and the condition would be true as 2<=5. This will print "2" on the screen and will continue for "i" as 3, 4, and 5, and will print 3, 4, 5 on the screen as well. When the value of "i" would be 6, the loop will find the condition as false (as 6<=5). This would be the termination for the loop.

Copyright Virtual University of Pakistan

Module 122

122. Programming Languages: Programming Concurrent Activities

Suppose we were asked to design a program to produce animation for an action computer game involving multiple attacking enemy spaceships. One approach would be to design a single program that would control the entire animation screen. Such a program would be charged with drawing each of the spaceships, which (if the animation is to appear realistic) would mean that the program would have to keep up with the individual characteristics of numerous spacecraft. An alternate approach would be to design a program to control the animation of a single spaceship whose characteristics are determined by parameters assigned at the beginning of the program's execution. Then the animation could be constructed by creating multiple activations of this program, each with its own set of parameters. By executing these activations simultaneously, we could obtain the illusion of many individual spaceships streaking across the screen at the same time.

Such simultaneous execution of multiple activations is called **parallel processing** or **concurrent processing.** True parallel processing requires multiple CPU cores, one to execute each activation. When only one CPU is available, the illusion of parallel processing is obtained by allowing the activations to share the time of the single processor in a manner similar to that implemented by multiprogramming systems.

Many modern computer applications are more easily solved in the context of parallel processing than in the more traditional context involving a single sequence of instructions. In turn, newer programming languages provide syntax for expressing the semantic structures involved in parallel computations. The design of such a language requires the identification of these semantic structures and the development of a syntax for representing them.

Each programming language tends to approach the parallel processing paradigm from its own point of view, resulting in different terminology. For example, what we have informally referred to as an *activation* is called a *task* in the Ada vernacular and a *thread* in Java. That is, in an Ada program, simultaneous actions are performed by creating multiple *tasks*, whereas in Java one creates multiple *threads*. In either case, the result is that multiple activities are generated and executed in much the same way as processes under the control of a multitasking operating system. We will adopt the Java terminology and refer to such "processes" as threads.

Perhaps the most basic action that must be expressed in a program involving parallel processing is that of creating new threads. If we want multiple activations of the spaceship program to be executed at the same time, we need a syntax for saying so. Such spawning of new threads is similar to that of requesting the execution of a traditional function. The difference is that, in the traditional setting, the program unit that requests the activation of a function does not progress any further until the requested function terminates (recall Figure 6.8), whereas in the parallel context the requesting program unit continues execution while the requested function performs its task (Figure 96). Thus, to create multiple space- ships streaking across the screen, we would write a main program that simply generates multiple activations of the spaceship program, each provided with the parameters describing the distinguishing characteristics of that spaceship.

Copyright Virtual University of Pakistan

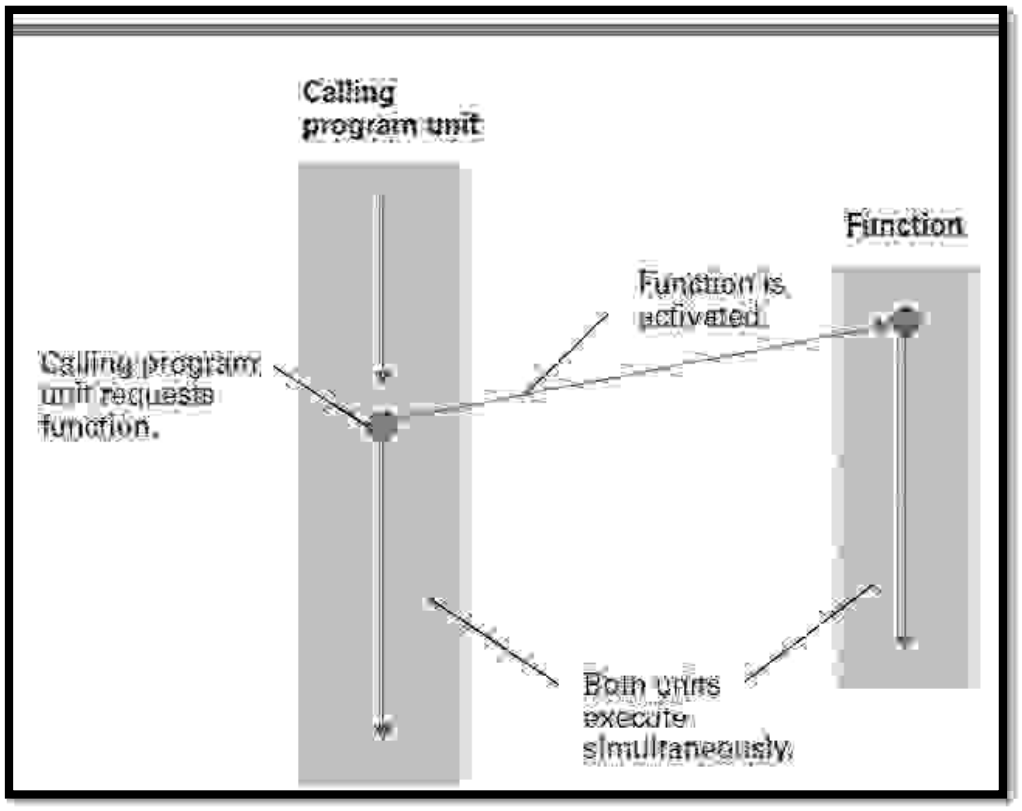


Figure 96: Spawning threads

A more complex issue associated with parallel processing involves handling communication between threads. For instance, in our spaceship example, the threads representing the different spaceships might need to communicate their locations among themselves in order to coordinate their activities. In other cases, one thread might need to wait until another reaches a certain point in its computation, or one thread might need to stop another one until the first has accomplished a particular task.

Such communication needs have long been a topic of study among computer scientists, and many newer programming languages reflect various approaches to thread interaction problems. As an example, let us consider the communication problems encountered when two threads manipulate the same data. If each of two threads that are executing concurrently need to add the value three to a common item of data, a method is needed to ensure that one thread is allowed to complete its transaction before the other is allowed to perform its task. Otherwise they could both start their individual computations with the same initial value, which would mean that the final result would be incremented by only three rather than six. Data that can be accessed by only one thread at a time is said to have mutually exclusive access.

One way to implement mutually exclusive access is to write the program units that describe the threads involved so that when a thread is using shared data, it blocks other threads from accessing that data until such access is safe.

Copyright Virtual University of Pakistan

Module 123

123. Programming Languages: Arithmetic Operators Examples

C-language has the following arithmetic operators:

+	Addition
-	Subtraction
*****	Multiplication
/	Division
%	Modulus

+, -, and * are the same as used in the mathematics. However, the "/" has a difference. If one of the operands is decimal number, then it results in the same way as in mathematics, for example:

5.0/2.0 would result into 2.5.

However, when both operands are integers, then it would truncate the decimal point and

5/2 would result into 2.

The remaining "1" can be acquired by using the modulus operator (%).

5%2 would give 1.

Module 124

124. Programming Languages: Relational Operators Examples

C-language has the following relational operators:

<	Less than
<=	Less than or equal to
>	Greater than
>=	Greater than or equal to
= =	Equal to
!=	Not Equal to

C++ Relational Operators are used to compare values of two variables. Here in example we used the operators in if statement.

Now if the result after comparison of two variables is True, then if statement returns value 1.

And if the result after comparison of two variables is False, then if statement returns value 0.

```
#include<iostream>
using namespace std;
void main()
{
  int a=10,b=20,c=10;

  if(a>b)
```


Copyright Virtual University of Pakistan

```
    cout<<"a is greater"<<endl;

  if(a<b)
    cout<<"a is smaller"<<endl;

  if(a<=c)
    cout<<"a is less than/equal to c"<<endl;

  if(a>=c)
    cout<<"a is less than/equal to c"<<endl;
  }
```

Output

```
a is smaller
a is less than/equal to c
a is greater than/equal to c
```

In C++ Relational operators, two operators that is = = (Is Equal to) and != (is Not Equal To), are used to check whether the two variables to be compared are equal or not.

Let us take one example which demonstrate these two operators.

```
#include<iostream>
using namespace std;
void main()
{
  int num1 = 30;
  int num2 = 40;
  int num3 = 40;

  if(num1!=num2)
    cout<<"num1 Is Not Equal To num2"<<endl;

  if(num2==num3)
    cout<<"num2 Is Equal To num3"<<endl;

  }
```

Output

```
num1 Is Not Equal To num2
num2 Is Equal To num3
```


Copyright Virtual University of Pakistan

Module 125

125. Programming Languages: Logical Operators Examples

1. C-language Logical Operators are used if we want to compare more than one condition.
2. Depending upon the requirement, proper logical operator is used.
3. Following table shows us the different C++ operators available

Operators	Name of the Operator	Type
&&	AND Operator	Binary
||	OR Operator	Binary
!	NOT Operator	Unary

According to names of the Logical Operators, the condition satisfied in following situation and expected outputs are given

Operator	Output
AND	Output is 1 only when conditions on both sides of Operator become True
OR	Output is 0 only when conditions on both sides of Operator become False
NOT	It gives inverted Output

Let us look at all logical operators with example-

```
#include<iostream>
using namespace std;

int main()
{
  int num1=30;
  int num2=40;

  if(num1>=40 || num2>=40)
    cout<<"OR If Block Gets Executed"<<endl;

  if(num1>=20 && num2>=20)
    cout<<"AND If Block Gets Executed"<<endl;

  if(!(num1>=40))
    cout<<"NOT If Block Gets Executed"<<endl;

  return 0;
}
```

Output:

```
OR If Block Gets Executed
```


Copyright Virtual University of Pakistan

```
AND If Block Gets Executed
NOT If Block Gets Executed
```

Explanation of the Program

Or statement gives output = 1 when any of the two condition is satisfied.

```
if(num1>40 || num2>=40)
```

Here in above program , num2=40. So, one of the two conditions is satisfied. So, statement is executed.

For AND operator, output is 1 only when both conditions are satisfied.

```
if(num1>=20 && num2>=20)
```

Thus, in above program, both the conditions are True so if block gets executed.

Truth Table

Operator	1st Condition	2nd Condition	Output
AND	True	True	True
	True	False	False
	False	True	False
	False	False	False
OR	True	True	True
	True	False	True
	False	True	True
	False	False	False
NOT	True	–	False
	False	–	True

Copyright Virtual University of Pakistan

Module 126

126. Software Engineering: Software Engineering Discipline

To appreciate the problems involved in software engineering, it is helpful to select a large complex device (an automobile, a multistory office building, or perhaps a cathedral) and imagine being asked to design it and then to supervise its construction. How can you estimate the cost in time, money, and other resources to complete the project? How can you divide the project into manageable pieces? How can you ensure that the pieces produced are compatible? How can those working on the various pieces communicate? How can you measure progress? How can you cope with the wide range of detail (the selection of the doorknobs, the design of the gargoyles, the availability of blue glass for the stained glass windows, the strength of the pillars, the design of the duct work for the heating system)? Questions of the same scope must be answered during the development of a large software system.

Because engineering is a well-established field, you might think that there is a wealth of previously developed engineering techniques that can be useful in answering such questions. This reasoning is partially true, but it overlooks fundamental differences between the properties of software and those of other fields of engineering. These distinctions have challenged software engineering projects, leading to cost overruns, late delivery of products, and dissatisfied customers. In turn, identifying these distinctions has proven to be the first step in advancing the software engineering discipline.

One such distinction involves the ability to construct systems from generic prefabricated components. Traditional fields of engineering have long benefited from the ability to use "off-the-shelf" components as building blocks when constructing complex devices. The designer of a new automobile does not have to design a new engine or transmission but instead uses previously designed versions of these components. Software engineering, however, lags in this regard. In the past, previously designed software components were domain specific that is, their internal design was based on a specific application and thus their use as generic components was limited. The result is that complex software systems have historically been built from scratch. As we will see in this chapter, significant progress is being made in this regard, although more work remains to be done.

Another distinction between software engineering and other engineering disciplines is the lack of quantitative techniques, called **metrics,** for measuring the properties of software. For example, to project the cost of developing a software system, one would like to estimate the complexity of the proposed product, but methods for measuring the "complexity" of software are evasive. Similarly, evaluating the quality of a software product is challenging. In the case of mechanical devices, an important measure of quality is the mean time between failures, which is essentially a measurement of how well a device endures wear. Software, in contrast, does not wear out, so this method of measuring quality is not as applicable in software engineering.

The difficulties involved in measuring software properties in a quantitative manner is one of the reasons that software engineering has struggled to find a rigorous footing in the same sense as mechanical and electrical engineering. Whereas these latter subjects are founded on the established science of physics, software engineering continues to search for its roots.

Thus, research in software engineering is currently progressing on two levels: Some researchers, sometimes called practitioners, work toward developing techniques for immediate application, whereas others, called theoreticians, search for underlying principles and theories on which more stable techniques can someday be constructed. Being based on a subjective foundation, many methodologies developed and promoted by practitioners in the past have been replaced by other approaches that may themselves become obsolete with time. Meanwhile, progress by theoreticians continues to be slow.

Copyright Virtual University of Pakistan

The need for progress by both practitioners and theoreticians is enormous. Our society has become addicted to computer systems and their associated software. Our economy, healthcare, government, law enforcement, transportation, and defense depend on large software systems. Yet there continue to be major problems with the reliability of these systems. Software errors have caused such disasters and near disasters as the rising moon being interpreted as a nuclear attack, a one-day loss of $5 million by the Bank of New York, the loss of space probes, radiation overdoses that have killed and paralyzed, and the simultaneous disruption of telephone communications over large regions.

This is not to say that the situation is all bleak. Much progress is being made in overcoming such problems as the lack of prefabricated components and metrics. Moreover, the application of computer technology to the software development process, resulting in what is called **computer-aided software engineering (CASE),** is continuing to streamline and otherwise simplify the software development process. CASE has led to the development of a variety of computerized systems, known as **CASE tools,** which include project planning systems (to assist in cost estimation, project scheduling, and personnel allocation), project management systems (to assist in monitoring the progress of the development project), documentation tools (to assist in writing and organizing documentation), prototyping and simulation systems (to assist in the development of prototypes), interface design systems (to assist in the development of GUIs), and programming systems (to assist in writing and debugging programs). Some of these tools are little more than the word processors, spreadsheet software, and email communication systems that were originally developed for generic use and adopted by software engineers. Others are quite sophisticated packages designed primarily for the software engineering environment. Indeed, systems known as **integrated development environments (IDEs)** combine tools for developing software (editors, compilers, debugging tools, and so on) into a single, integrated package. Prime examples of such systems are those for developing applications for smartphones. These not only provide the programming tools necessary to write and debug the software but also provide simulators that, by means of graphical displays, allow a programmer to see how the software being developed would actually perform on a phone.

Copyright Virtual University of Pakistan

Module 127

127. Software Engineering: Software Life cycle

The most fundamental concept in software engineering is the software life cycle. The software life cycle is shown in Figure 97. This figure represents the fact that once software is developed, it enters a cycle of being used and maintained—a cycle that continues for the rest of the software's life. Such a pattern is common for many manufactured products as well. The difference is that, in the case of other products, the maintenance phase tends to be a repair process, whereas in the case of software, the maintenance phase tends to consist of correcting or updating. Indeed, software moves into the maintenance phase because errors are discovered, changes in the software's application occur that require corresponding changes in the software, or changes made during a previous modification are found to induce problems elsewhere in the software.

Regardless of why software enters the maintenance phase, the process requires that a person (often not the original author) study the underlying program and its documentation until the program, or at least the pertinent part of the program, is understood. Otherwise, any modification could introduce more problems than it solves. Acquiring this understanding can be a difficult task, even when the software is well-designed and documented. In fact, it is often within this phase that a piece of software is discarded under the pretense (too often true) that it is easier to develop a new system from scratch than to modify the existing package successfully.

Experience has shown that a little effort during the development of software can make a tremendous difference when modifications are required.

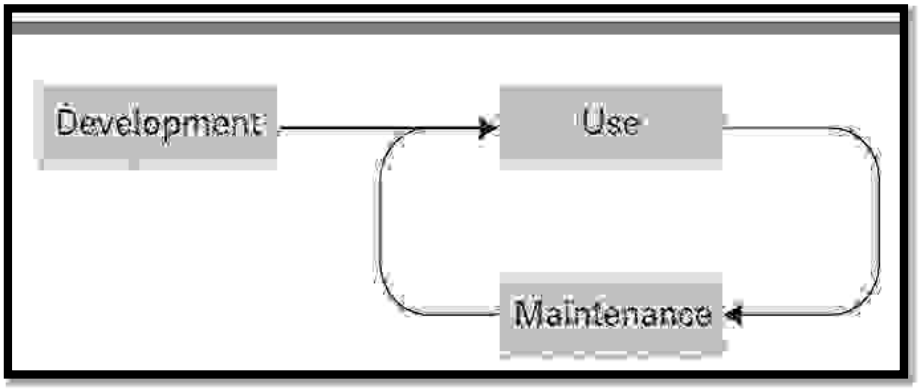


Figure 97: The software life cycle

Copyright Virtual University of Pakistan

Module 128

128. Software Engineering: Requirement Analysis Phase

The major steps in the traditional software development life cycle are requirements analysis, design, implementation, and testing (Figure 98).

Requirements Analysis: The software life cycle begins with requirements analysis— the goal of which is to specify what services the proposed system will provide, to identify any conditions (time constraints, security, and so on) on those services, and to define how the outside world will interact with the system.

Requirements analysis involves significant input from the **stakeholders** (future users as well as those with other ties, such as legal or financial interests) of the proposed system. In fact, in cases where the ultimate user is an entity, such as a company or government agency, that intends to hire a software developer for the actual execution of the software project, requirements analysis may start by a feasibility study conducted solely by the user. In other cases, the software developer may be in the business of producing **commercial off-the-shelf (COTS)** software for the mass market, perhaps to be sold in retail stores or downloaded via the Internet. In this setting the user is a less precisely defined entity, and requirements analysis may begin with a market study by the software developer. In any case, the requirements analysis process consists of compiling and analyzing the needs of the software user; negotiating with the project's stakeholders over trade-offs between wants, needs, costs, and feasibility; and finally developing a set of requirements that identify the features and services that the finished software system must have. These requirements are recorded in a document called a **software requirements specification.** In a sense, this document is a written agreement between all parties concerned, which is intended to guide the software's development and provide a means of resolving disputes that may arise later in the development process. The significance of the software requirements specification is demonstrated by the fact that professional organizations such as IEEE and large software clients such as the U.S. Department of Defense have adopted standards for its composition.

From the software developer's perspective, the software requirements specification should define a firm objective toward which the software's development can proceed. Too often, however, the document fails to provide this stability. Indeed, most practitioners in the software engineering field argue that poor communication and changing requirements are the major causes of cost overruns and late product delivery in the software engineering industry. Few customers would insist on major changes to a building's floor plan once the foundation has been constructed, but instances abound of organizations that have expanded, or otherwise altered, the desired capabilities of a software system well after the software's construction was underway. This may have been because a company decided that the system that was originally being developed for only a subsidiary should instead apply to the entire corporation or that advances in technology supplanted the capabilities available during the initial requirements analysis. In any case, software engineers have found that straightforward and frequent communication with the project's stakeholders is mandatory.

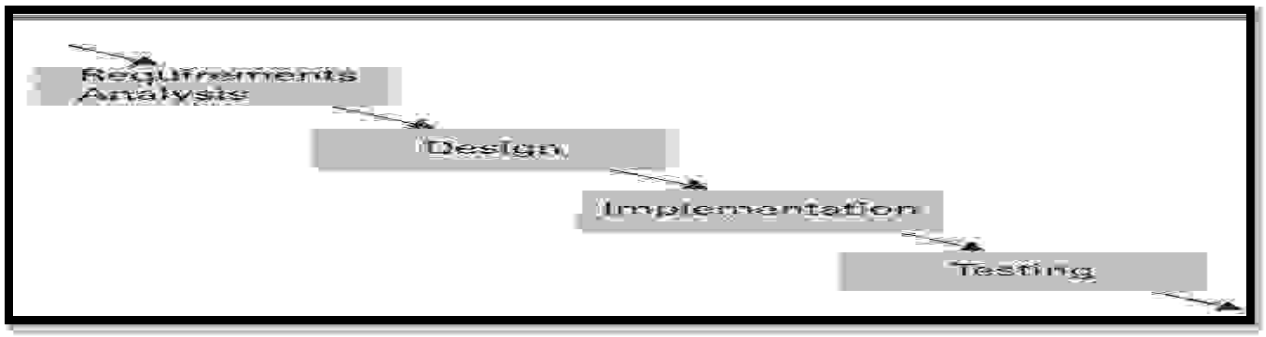


Figure 98: The traditional development phase of the software life cycle

Copyright Virtual University of Pakistan

Module 129

129. Software Engineering: Design Phase

Whereas requirements analysis provides a description of the proposed software product, design involves creating a plan for the construction of the proposed system. In a sense, requirements analysis is about identifying the problem to be solved, while design is about developing a solution to the problem. From a lay- person's perspective, requirements analysis is often equated with deciding *what* a software system is to do, whereas design is equated with deciding *how* the system will do it. Although this description is enlightening, many software engineers argue that it is flawed because, in actuality, there is a lot of *how* considered during requirements analysis and a lot of *what* considered during design.

It is in the design stage that the internal structure of the software system is established. The result of the design phase is a detailed description of the software system's structure that can be converted into programs.

If the project were to construct an office building rather than a software system, the design stage would consist of developing detailed structural plans for a building that meets the specified requirements. For example, such plans would include a collection of blueprints describing the proposed building at various levels of detail. It is from these documents that the actual building would be constructed. Techniques for developing these plans have evolved over many years and include standardized notational systems and numerous modeling and diagramming methodologies.

Copyright Virtual University of Pakistan

Module 130

130. Software Engineering: Implementation Phase

Implementation involves the actual writing of programs, creation of data files, and development of databases. It is at the implementation stage that we see the distinction between the tasks of a **software analyst** (sometimes referred to as a system analyst) and a **programmer.** The former is a person involved with the entire development process, perhaps with an emphasis on the requirements analysis and design steps. The latter is a person involved primarily with the implementation step. In its narrowest interpretation, a programmer is charged with writing programs that implement the design produced by a software analyst. Having made this distinction, we should note again that there is no central authority controlling the use of terminology throughout the computing community. Many who carry the title of software analyst are essentially programmers, and many with the title programmer (or perhaps senior programmer) are actually software analysts in the full sense of the term. This blurring of terminology is founded in the fact that today the steps in the software development process are often intermingled.

Copyright Virtual University of Pakistan

Module 131

131. Software Engineering: Testing Phase

In the traditional development phase of the past, testing was essentially equated with the process of debugging programs and confirming that the final software product was compatible with the software requirements specification. Today, however, this vision of testing is considered far too narrow. Programs are not the only artifacts that are tested during the software development process. Indeed, the result of each intermediate step in the entire development process should be "tested" for accuracy. Testing is now recognized as only one segment in the overall struggle for quality assurance, which is an objective that permeates the entire software life cycle. Thus, many software engineers argue that testing should no longer be viewed as a separate step in software development, but instead it, and its many manifestations, should be incorporated into the other steps, producing a three-step development process whose components might have names such as "requirements analysis *and confirmation,*" "design *and validation,*" and "implementation *and testing.*"

Unfortunately, even with modern quality assurance techniques, large software systems continue to contain errors, even after significant testing. Many of these errors may go undetected for the life of the system, but others may cause major malfunctions. The elimination of such errors is one of the goals of software engineering. The fact that they are still prevalent indicates that a lot of research remains to be done.

Copyright Virtual University of Pakistan

Module 132

132. Software Engineering: Software Engineering Methodologies (I)

Early approaches to software engineering insisted on performing requirements analysis, design, implementation, and testing in a strictly sequential manner. The belief was that too much was at risk during the development of a large software system to allow for variations. As a result, software engineers insisted that the entire requirements specification of the system be completed before beginning the design and, likewise, that the design be completed before beginning implementation. The result was a development process now referred to as the **water- fall model,** an analogy to the fact that the development process was allowed to flow in only one direction.

In recent years, software engineering techniques have changed to reflect the contradiction between the highly structured environment dictated by the water- fall model and the "free-wheeling," trial-and-error process that is often vital to creative problem solving. This is illustrated by the emergence of the **incremental model** for software development. Following this model, the desired software system is constructed in increments, the first being a simplified version of the final product with limited functionality. Once this version has been tested and perhaps evaluated by the future user, more features are added and tested in an incremental manner until the system is complete. For example, if the system being developed is a patient records system for a hospital, the first increment may incorporate only the ability to view patient records from a small sample of the entire record system. Once that version is operational, additional features, such as the ability to add and update records, would be added in a stepwise manner.

Another model that represents the shift away from strict adherence to the waterfall model is the **iterative model,** which is similar to, and in fact sometimes equated with, the incremental model, although the two are distinct. Whereas the incremental model carries the notion of *extending* each preliminary version of a product into a larger version, the iterative model encompasses the concept of *refining* each version. In reality, the incremental model involves an underlying iterative process, and the iterative model may incrementally add features.

A significant example of iterative techniques is the **rational unified process** (**RUP,** rhymes with "cup") that was created by the Rational Software Corporation, which is now a division of IBM. RUP is essentially a software development paradigm that redefines the steps in the development phase of the software life cycle and provides guidelines for performing those steps. These guidelines, along with CASE tools to support them, are marketed by IBM. Today, RUP is widely applied throughout the software industry. In fact, its popularity has led to the development of a nonproprietary version, called the **unified process,** that is available on a noncommercial basis.

Copyright Virtual University of Pakistan

Module 133

133. Software Engineering: Software Engineering Methodologies (II)

Incremental and iterative models sometimes make use of the trend in software development toward **prototyping** in which incomplete versions of the proposed system, called prototypes, are built and evaluated. In the case of the incremental model these prototypes evolve into the complete, final system, a process known as **evolutionary prototyping.** In a more iterative situation, the prototypes may be discarded in favor of a fresh implementation of the final design. This approach is known as **throwaway prototyping.** An example that normally falls within this throwaway category is **rapid prototyping** in which a simple example of the proposed system is quickly constructed in the early stages of development. Such a prototype may consist of only a few screen images that give an indication of how the system will interact with its users and what capabilities it will have. The goal is not to produce a working version of the product but to obtain a demonstration tool that can be used to clarify communication between the parties involved in the software development process. For example, rapid prototypes have proved advantageous in clarifying system requirements during requirements analysis or as aids during sales presentations to potential clients.

A less formal incarnation of incremental and iterative ideas that has been used for years by computer enthusiasts/hobbyists is known as **open-source development.** This is the means by which much of today's free software is produced. Perhaps the most prominent example is the Linux operating system whose open-source development was originally led by Linus Torvalds. The open-source development of a software package proceeds as follows: A single author writes an initial version of the software (usually to fulfill his or her own needs) and posts the source code and its documentation on the Internet. From there it can be downloaded and used by others without charge. Because these other users have the source code and documentation, they are able to modify or enhance the software to fit their own needs or to correct errors that they find. They report these changes to the original author, who incorporates them into the posted version of the software, making this extended version available for further modifications. In practice, it is possible for a software package to evolve through several extensions in a single week.

Perhaps the most pronounced shift from the waterfall model is represented by the collection of methodologies known as **agile methods,** each of which pro- poses early and quick implementation on an incremental basis, responsiveness to changing requirements, and a reduced emphasis on rigorous requirements analysis and design. One example of an agile method is **extreme programming (XP).** Following the XP model, software is developed by a team of less than a dozen individuals working in a communal workspace where they freely share ideas and assist each other in the development project. The software is developed incrementally by means of repeated daily cycles of informal requirements analysis, designing, implementing, and testing. Thus, new expanded versions of the software package appear on a regular basis, each of which can be evaluated by the project's stakeholders and used to point toward further increments. In summary, agile methods are characterized by flexibility, which is in stark contrast to the waterfall model that conjures the image of managers and programmers working in individual offices while rigidly performing well-defined portions of the overall software development task.

The contrasts depicted by comparing the waterfall model and XP reveal the breadth of methodologies that are being applied to the software development process in the hopes of finding better ways to construct reliable software in an efficient manner. Research in the field is an ongoing process. Progress is being made, but much work remains to be done.

Copyright Virtual University of Pakistan

Module 134

134. Software Engineering: Software Engineering Methodologies (II)

A key point is that to modify software one must understand the program or at least the pertinent parts of the program. Gaining such an understanding is often difficult enough in the case of small programs and would be close to impossible when dealing with large software systems if it were not for **modularity** that is, the division of software into manageable units, generically called **modules,** each of which deals with only a part of the software's overall responsibility.

Modules come in a variety of forms. We have already seen that in the context of the imperative paradigm, modules appear as functions. In contrast, the object-oriented paradigm uses objects as the basic modular constituents. These distinctions are important because they determine the underlying goal during the initial software design process. Is the goal to represent the overall task as individual, manageable processes or to identify the objects in the system and understand how they interact?

To illustrate, let us consider how the process of developing a simple modular program to simulate a tennis game might progress in the imperative and the object-oriented paradigms. In the imperative paradigm we begin by considering the actions that must take place. Because each volley begins with a player serving the ball, we might start by considering a function named Serve that (based on the player's characteristics and perhaps a bit of probability) would compute the initial speed and direction of the ball. Next, we would need to determine the path of the ball (Will it hit the net? Where will it bounce?). We might plan on placing these computations in another function named ComputePath. The next step might be to determine if the other player is able to return the ball, and if so, we must compute the ball's new speed and direction. We might plan on placing these computations in a function named Return.

Continuing in this fashion, we might arrive at the modular structure depicted by the **structure chart** shown in Figure 99, in which functions are represented by rectangles and function dependencies (implemented by function calls) are represented by arrows. In particular, the chart indicates that the entire game is overseen by a function named ControlGame, and to perform its task, ControlGame calls on the services of the functions Serve, Return, ComputePath, and UpdateScore.

Note that the structure chart does not indicate how each function is to perform its task. Rather, it merely identifies the functions and indicates the dependencies among the functions. In reality, the function ControlGame might perform its task by first calling the Serve function, then repeatedly calling on the functions ComputePath and Return until one reports a miss, and finally calling on the services of UpdateScore before repeating the whole process by again calling on Serve.

At this stage we have obtained only a very simplistic outline of the desired program, but our point has already been made. In accordance with the imperative paradigm, we have been designing the program by considering the activities that must be performed and are therefore obtaining a design in which the modules are functions.

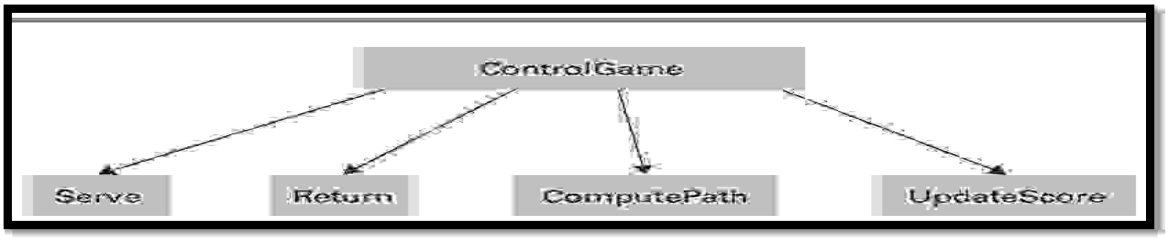


Figure 99: A simple structure chart

Copyright Virtual University of Pakistan

Module 135

135. Software Engineering: Coupling

We have introduced modularity as a way of producing manageable software. The idea is that any future modification will likely apply to only a few of the modules, allowing the person making the modification to concentrate on that portion of the system rather than struggling with the entire package. This, of course, depends on the assumption that changes in one module will not unknowingly affect other modules in the system. Consequently, a goal when designing a modular system should be to maximize independence among modules or, in other words, to minimize the linkage between modules (known as intermodule **coupling**). Indeed, one metric that has been used to measure the complexity of a software system (and thus obtain a means of estimating the expense of maintaining the software) is to measure its intermodule coupling.

Intermodule coupling occurs in several forms. One is **control coupling,** which occurs when a module passes control of execution to another, as in a function call. The structure chart in Figure 99 represents the control coupling that exists between functions. In particular, the arrow from the module ControlGame to Serve indicates that the former passes control to the latter. It is also control coupling that is represented in Figure 100, where the arrows trace the path of control as it is passed from object to object.

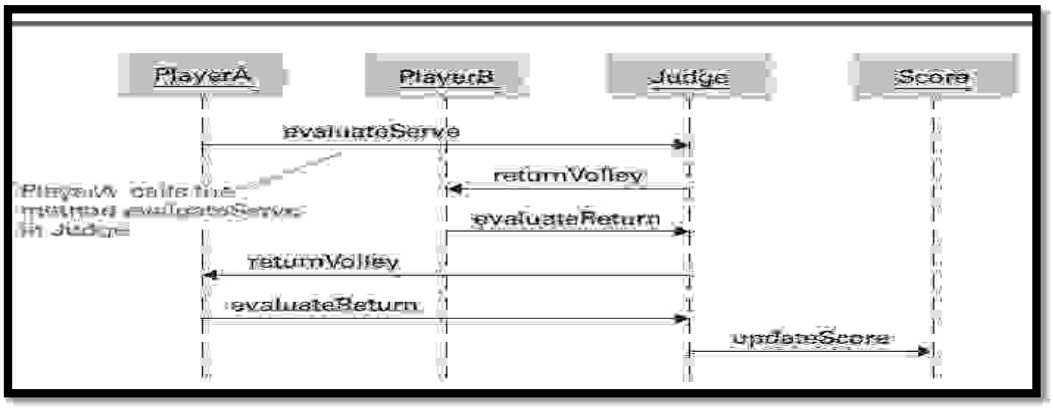


Figure 100: The interaction between objects resulting from PlayerA's serve.

Another form of intermodule coupling is **data coupling,** which refers to the sharing of data between modules. If two modules interact with the same item of data, then modifications made to one module may affect the other, and modifications to the format of the data itself could have repercussions in both modules.

Data coupling between functions can occur in two forms. One is by explicitly passing data from one function to another in the form of parameters. Such coupling is represented in a structure chart by an arrow between the functions that is labeled to indicate the data being passed. The direction of the arrow indicates the direction in which the item is transferred.

Similar data coupling occurs between objects in an object-oriented design. For example, when PlayerA asks the object Judge to evaluate its serve (see Figure 100), it must pass the trajectory information to Judge. On the other hand, one of the benefits of the object-oriented paradigm is that it inherently tends to reduce data coupling between objects to a minimum. This is because the methods within an object tend to include all those functions that manipulate the object's internal data. For example, the object PlayerA will contain information regarding that player's characteristics as well as all the methods that require that information. In turn, there is no need to pass that information to other objects and thus interobject data coupling is minimized.

Copyright Virtual University of Pakistan

In contrast to passing data explicitly as parameters, data can be shared among modules implicitly in the form of **global data,** which are data items that are automatically available to all modules throughout the system, as opposed to local data items that are accessible only within a particular module unless explicitly passed to another. Most high-level languages provide ways of implementing both global and local data, but the use of global data should be employed with caution. The problem is that a person trying to modify a module that is dependent on global data may find it difficult to identify how the module in question interacts with other modules. In short, the use of global data can degrade the module's usefulness as an abstract tool.

Copyright Virtual University of Pakistan

Module 136

136. Software Engineering: Cohesion

Just as important as minimizing the coupling between modules is maximizing the internal binding within each module. The term **cohesion** refers to this internal binding or, in other words, the degree of relatedness of a module's internal parts. To appreciate the importance of cohesion, we must look beyond the initial development of a system and consider the entire software life cycle. If it becomes necessary to make changes in a module, the existence of a variety of activities within it can confuse what would otherwise be a simple process. Thus, in addition to seeking low intermodule coupling, software designers strive for high intramodule cohesion. A weak form of cohesion is known as **logical cohesion.** This is the cohesion within a module induced by the fact that its internal elements perform activities logically similar in nature. For example, consider a module that performs all of a system's communication with the outside world. The "glue" that holds such a module together is that all the activities within the module deal with communication. However, the topics of the communication can vary greatly. Some may deal with obtaining data, whereas others deal with reporting results.

A stronger form of cohesion is known as **functional cohesion,** which means that all the parts of the module are focused on the performance of a single activity. In an imperative design, functional cohesion can often be increased by isolating subtasks in other modules and then using these modules as abstract tools. This is demonstrated in our tennis simulation example (see again Figure 99) where the module ControlGame uses the other modules as abstract tools so that it can concentrate on overseeing the game rather than being distracted by the details of serving, returning, and maintaining the score.

In object-oriented designs, entire objects are usually only logically cohesive because the methods within an object often perform loosely related activities—the only common bond being that they are activities performed by the same object. For example, in our tennis simulation example, each player object contains methods for serving as well as returning the ball, which are significantly different activities. Such an object would therefore be only a logically cohesive module. However, software designers should strive to make each individual method within an object functionally cohesive. That is, even though the object in its entirety is only logically cohesive, each method within an object should perform only one functionally cohesive task (Figure 101).

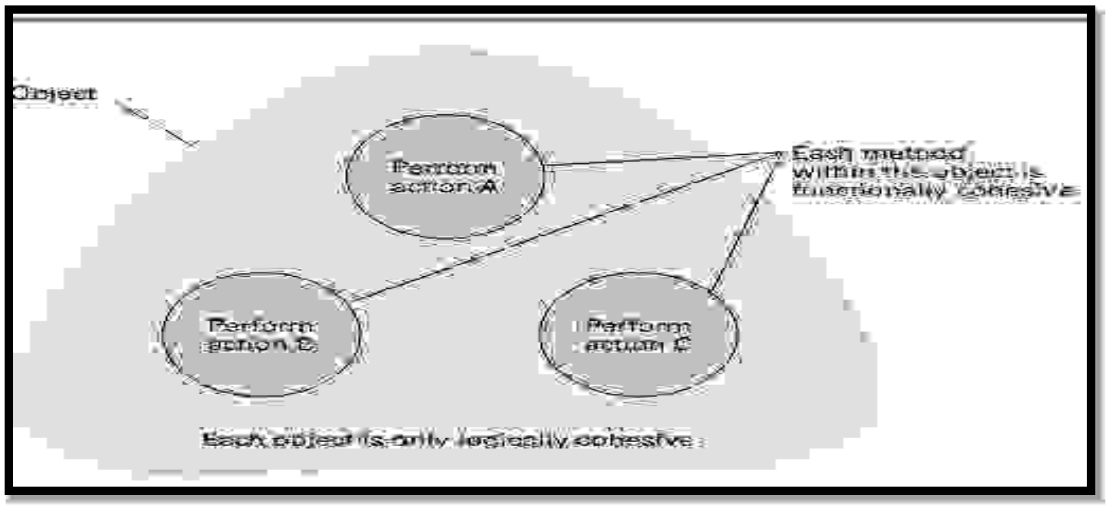


Figure 101: Logical and functional cohesion within an object

Copyright Virtual University of Pakistan

Module 137

137. Software Engineering: Information Hiding

One of the cornerstones of good modular design is captured in the concept of **information hiding,** which refers to the restriction of information to a specific portion of a software system. Here the term *information* should be interpreted in a broad sense, including any knowledge about the structure and contents of a program unit. As such, it includes data, the type of data structures used, encoding systems, the internal compositional structure of a module, the logical structure of a procedural unit, and any other factors regarding the internal properties of a module. The point of information hiding is to keep the actions of modules from having unnecessary dependencies or effects on other modules. Otherwise, the validity of a module may be compromised, perhaps by errors in the development of other modules or by misguided efforts during software maintenance. If, for example, a module does not restrict the use of its internal data from other modules, then that data may become corrupted by other modules. Or, if one module is designed to take advantage of another's internal structure, it could malfunction later if that internal structure is altered.

It is important to note that information hiding has two incarnations—one as a design goal, the other as an implementation goal. A module should be designed so that other modules do not need access to its internal information, and a module should be implemented in a manner that reinforces its boundaries. Examples of the former are maximizing cohesion and minimizing coupling. Examples of the latter involve the use of local variables, applying encapsulation, and using well- defined control structures.

Finally we should note that information hiding is central to the theme of abstraction and the use of abstract tools. Indeed, the concept of an abstract tool is that of a "black box" whose interior features can be ignored by its user, allowing the user to concentrate on the larger application at hand. In this sense then, information hiding corresponds to the concept of sealing the abstract tool in much the same way as a tamperproof enclosure can be used to safeguard complex and potentially dangerous electronic equipment. Both protect their users from the dangers inside as well as protect their interiors from intrusion from their users.

Copyright Virtual University of Pakistan

Module 138

138. Software Engineering: Components

We have already mentioned that one obstacle in the field of software engineering is the lack of prefabricated "off-the-shelf" building blocks from which large software systems can be constructed. The modular approach to software development promises hope in this regard. In particular, the object-oriented programming paradigm is proving especially useful because objects form complete, self-contained units that have clearly defined interfaces with their environments. Once an object, or more correctly a class, has been designed to fulfill a certain role, it can be used to fulfill that role in any program requiring that service. More- over, inheritance provides a means of refining prefabricated object definitions in those cases in which the definitions must be customized to conform to the needs of a specific application. It is not surprising, then, that the object-oriented programming languages C++, Java, and C# are accompanied by collections of prefabricated "templates" from which programmers can easily implement objects for performing certain roles. In particular, C++ is associated with the C++ Standard Template Library, the Java programming environment is accompanied by the Java Application Programmer Interface (API), and C# programmers have access to the .NET Framework Class Library.

The fact that objects and classes have the potential of providing prefabricated building blocks for software design does not mean that they are ideal. One problem is that they provide relatively small blocks from which to build. Thus, an object is actually a special case of the more general concept of a **component,** which is, by definition, a reusable unit of software. In practice, most components are based on the object-oriented paradigm and take the form of a collection of one or more objects that function as a self-contained unit.

Research in the development and use of components has led to the emerging field known as **component architecture** (also known as component-based software engineering) in which the traditional role of a programmer is replaced by a **component assembler** who constructs software systems from prefabricated components that, in many development environments, are displayed as icons in a graphical interface. Rather than be involved with the internal programming of the components, the methodology of a component assembler is to select pertinent components from collections of predefined components and then connect them, with minimal customization, to obtain the desired functionality. Indeed, a property of a well-designed component is that it can be extended to encompass features of a particular application without internal modifications.

An area where component architectures have found fertile ground is in smartphone systems. Due to the resource constraints of these devices, applications are actually a set of collaborating components, each of which provides some discrete function for the application. For example, each display screen within an application is usually a separate component. Behind the scenes, there may exist other service components to store and access information on a memory card, perform some continuous function (such as playing music), or access information over the Internet. Each of these components is individually started and stopped as needed to service the user efficiently; however, the application appears as a seamless series of displays and actions.

Aside from the motivation to limit the use of system resources, the component architecture of smartphones pays dividends in integration between applications. For example, Facebook (a well-known social networking system) when executed on a smartphone may use the components of the contacts application to add all Facebook friends as contacts. Furthermore, the telephony application (the one that handles the functions of the phone), may also access the contacts' components to lookup the caller of an incoming call. Thus, upon receiving a call from a Facebook friend, the friend's picture can be displayed on the phone's screen (along with his or her last Facebook post).

Copyright Virtual University of Pakistan

Module 139

139. Software Engineering: Design Patterns

An increasingly powerful tool for software engineers is the growing collection of design patterns. A **design pattern** is a pre-developed model for solving a recurring problem in software design. For example, the Adapter pattern provides a solution to a problem that often occurs when constructing software from prefabricated modules. In particular, a prefabricated module may have the functionality needed to solve the problem at hand but may not have an interface that is compatible with the current application. In such cases the Adapter pattern provides a standard approach to "wrapping" that module inside another module that translates between the original module's interface and the outside world, thus allowing the original, prefabricated module to be used in the application.

Another well-established design pattern is the Decorator pattern. It provides a means of designing a system that performs different combinations of the same activities depending on the situation at the time. Such systems can lead to an explosion of options that, without careful design, can result in enormously complex software. However, the Decorator pattern provides a standardized way of implementing such systems that leads to a manageable solution.

The identification of recurring problems as well as the creation and cataloging of design patterns for solving them is an ongoing considerations of good design principles such as minimizing coupling and maximizing cohesion play an important role in the development of design patterns.

The results of progress in design pattern development are reflected in the library of tools provided in today's software development packages such as the Java programming environments provided by Oracle and the .NET Framework provided by Microsoft. Indeed, many of the templates found in these tool kits are essentially design pattern skeletons that lead to ready-made, high-quality solutions to design problems.

In closing, we should mention that the emergence of design patterns in software engineering is an example of how diverse fields can contribute to each other. The origins of design patterns lie in the research of Christopher Alexander in traditional architecture. His goal was to identify features that contribute to high-quality architectural designs for buildings or building complexes and then to develop design patterns that incorporated those features. Today, many of his ideas have been incorporated into software design and his work continues to be an inspiration for many software engineers process in software engineering.

Copyright Virtual University of Pakistan

Module 140

140. Software Engineering: Design Patterns Examples

Factory design Pattern:

The Factory Design Pattern (Figure 102) is a commonly used design pattern where we need to create Loosely Coupled System. Basically, it comes under Creational Pattern and it is used to create instance and reuse it. Factory Pattern is based on real time factory concept. As we know, a factory is used to manufacture something as per the requirement and if new items are added in the manufacturing process, the factory starts manufacturing those items as well. Factory class provides abstraction between Client and Car when creating the instance of the Car [Honda, BMW etc] increasingly powerful tool for software engineers is the growing collection of design

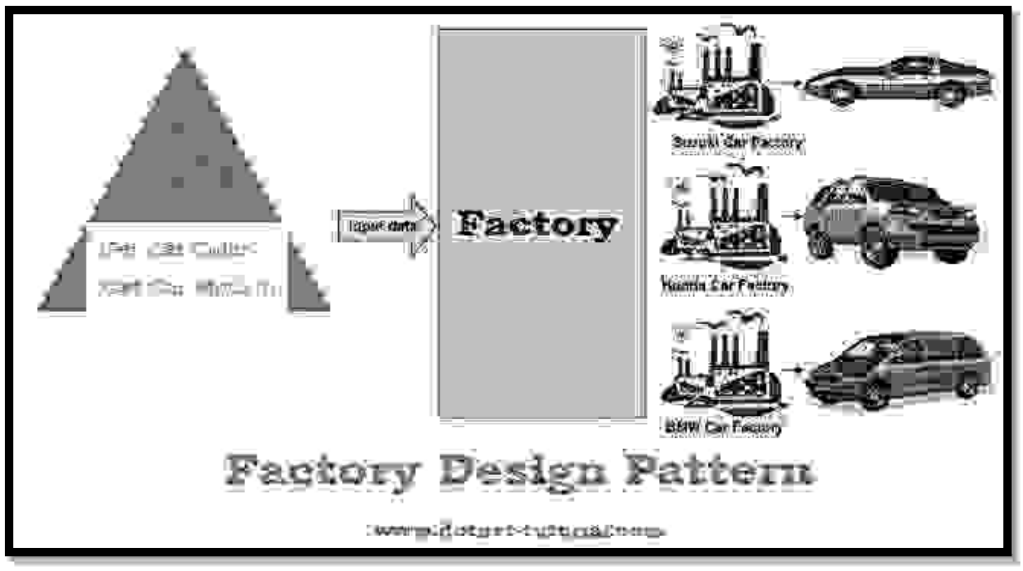


Figure 102: Factory Design Pattern

Shopping Cart Design Pattern:

- It has been shown in the Figure 103.
- Use when the user can possibly buy more than one product.
- Use when the user can possibly buy more than one instance of a product.
- Use when the user may want to return later to carry on shopping
- Use when the user may want to return at a later time to conduct payment
- Do not use when you only have one product to sell.
- Do not use when your site is arranged in a way, so that it does not make sense for the user to buy more than one product at a time (for instance for Application Service Providers (ASPs) allowing a user to upgrade his service).

Copyright Virtual University of Pakistan



Figure 103: Shopping Cart Design Pattern

Copyright Virtual University of Pakistan

Module 141

141. Software Engineering: Scope of Quality Assurance

In the early years of computing, the problem of producing quality software focused on removing programming errors that occurred during implementation. Later in this section we will discuss the progress that has been made in this direction. However, today, the scope of software quality control extends far beyond the debugging process, with branches including the improvement of software engineering procedures, the development of training programs that in many cases lead to certification, and the establishment of standards on which sound software engineering can be based. In this regard, we have already noted the role of organizations such as ISO, IEEE, and ACM in improving professionalism and establishing standards for assessing quality control within software development companies. A specific example is the ISO 9000 series of standards, which address numerous industrial activities such as design, production, installation, and servicing. Another example is ISO/IEC 15504, which is a set of standards developed jointly by the ISO and the International Electrotechnical Commission (IEC).

Many major software contractors now require that the organizations they hire to develop software meet such standards. As a result, software development companies are establishing **software quality assurance (SQA)** groups, which are charged with overseeing and enforcing the quality control systems adopted by the organization. Thus, in the case of the traditional waterfall model, the SQA group would be charged with the task of approving the software requirements specification before the design stage began or approving the design and its related documents before implementation was initiated.

Several themes underlie today's quality control efforts. One is record keeping. It is paramount that each step in the development process be accurately documented for future reference. However, this goal conflicts with human nature. An issue is the temptation to make decisions or change decisions without updating the related documents. The result is the chance that records will be incorrect and hence their use at future stages will be misleading. Herein lies an important benefit of CASE tools. They make such tasks as redrawing diagrams and updating data dictionaries much easier than with manual methods. Consequently, updates are more likely to be made and the final documentation is more likely to be accurate. (This example is only one of many instances in which software engineering must cope with the faults of human nature. Others include the inevitable personality conflicts, jealousies, and ego clashes that arise when people work together.)

Another quality-oriented theme is the use of reviews in which various parties involved in a software development project meet to consider a specific topic. Reviews occur throughout the software development process, taking the form of requirements reviews, design reviews, and implementation reviews. They may appear as a prototype demonstration in the early stages of requirements analysis, as a structured walkthrough among members of the software design team, or as coordination among programmers who are implementing related portions of the design. Such reviews, on a recurring basis, provide communication channels through which misunderstandings can be avoided and errors can be corrected before they grow into disasters. The significance of reviews is exemplified by the fact that they are specifically addressed in the IEEE Standard for Software Reviews, known as IEEE 1028.

Some reviews are pivotal in nature. An example is the review between representatives of a project's stakeholders and the software development team at which the final software requirements specification is approved. Indeed, this approval marks the end of the formal requirements analysis phase and is the basis on which the remaining development will progress. However, all reviews are significant, and for the sake of quality control, they should be documented as part of the ongoing record maintenance process.

Copyright Virtual University of Pakistan

Module 142

142. Software Engineering: Software Testing

Whereas software quality assurance is now recognized as a subject that permeates the entire development process, testing and verification of the programs themselves continues to be a topic of research. In module 107, we discussed techniques for verifying the correctness of algorithms in a mathematically rigorous manner but concluded that most software today is "verified" by means of testing. Unfortunately, such testing is inexact at best. We cannot guarantee that a piece of software is correct via testing unless we run enough tests to exhaust all possible scenarios. But, even in simple programs, there may be billions of different paths that could potentially be traversed. Thus, testing all possible paths within a complex program is an impossible task.

On the other hand, software engineers have developed testing methodologies that improve the odds of revealing errors in software with a limited number of tests. One of these is based on the observation that errors in software tend to be clumped. That is, experience has shown that a small number of modules within a large software system tend to be more problematic than the rest. Thus, by identifying these modules and testing them more thoroughly, more of the system's errors can be discovered than if all modules were tested in a uniform, less-thorough manner. This is an instance of the proposition known as the **Pareto principle,** in reference to the economist and sociologist Vilfredo Pareto (1848−1923) who observed that a small part of Italy's population controlled most of Italy's wealth. In the field of software engineering, the Pareto principle states that results can often be increased most rapidly by applying efforts in a concentrated area.

Another software testing methodology, called **basis path testing,** is to develop a set of test data that insures that each instruction in the software is executed at least once. Techniques using an area of mathematics known as graph theory have been developed for identifying such sets of test data. Thus, although it may be impossible to ensure that every path through a software system is tested, it is possible to ensure that every statement within the system is executed at least once during the testing process.

Techniques based on the Pareto principle and basis path testing rely on knowledge of the internal composition of the software being tested. They therefore fall within the category called **glass-box testing,** meaning that the software tester is aware of the interior structure of the software and uses this knowledge when designing the test. In contrast is the category called **black-box testing,** which refers to tests that do not rely on knowledge of the software's interior composition. In short, black-box testing is performed from the user's point of view. In black-box testing, one is not concerned with how the software goes about its task but merely with whether the software performs correctly in terms of accuracy and timeliness.

An example of black-box testing is the technique, called **boundary value analysis,** that consists of identifying ranges of data, called **equivalence classes,** over which the software should perform in a similar manner and then testing the software on data close to the edge of those ranges. For example, if the software is supposed to accept input values within a specified range, then the software would be tested at the lowest and highest values in that range, or if the software is supposed to coordinate multiple activities, then the software would be tested on the largest possible collection of activities. The underlying theory is that by identifying equivalence classes, the number of test cases can be minimized because correct operation for a few examples within an equivalence class tends to validate the software for the entire class. Moreover, the best chance of identifying an error within a class is to use data at the class edges.

Another methodology that falls within the black-box category is **beta testing** in which a preliminary version of the software is given to a segment of the intended audience with the goal of learning how the software performs in real-life situations before the final version of the product is solidified and released to the market. (Similar testing performed at the developer's site is called **alpha testing.**) The advantages of beta testing extend far beyond the traditional discovery of errors. General customer feedback (both positive and negative) is obtained that may assist in refining market strategies. Moreover, early distribution of beta

Copyright Virtual University of Pakistan

software assists other software developers in designing compatible products. For example, in the case of a new operating system for the PC market, the distribution of a beta version encourages the development of compatible utility software so that the final operating system ultimately appears on store shelves surrounded by companion products. Moreover, the existence of beta testing can generate a feeling of anticipation within the marketplace—an atmosphere that increases publicity and sales.

Copyright Virtual University of Pakistan

Module 143

143. Software Engineering: Documentation

A software system is of little use unless people can learn to use and maintain it. Hence, documentation is an important part of a final software package, and its development is, therefore, an important topic in software engineering.

Software documentation serves three purposes, leading to three categories of documentation: user documentation, system documentation, and technical documentation. The purpose of **user documentation** is to explain the features of the software and describe how to use them. It is intended to be read by the user of the software and is therefore expressed in the terminology of the application. Today, user documentation is recognized as an important marketing tool. Good user documentation combined with a well-designed user interface makes a software package accessible and thus increases its sales. Recognizing this, many soft- ware developers hire technical writers to produce this part of their product, or they provide preliminary versions of their products to independent authors so that how-to books are available in bookstores when the software is released to the public. User documentation traditionally takes the form of a physical book or booklet, but in many cases the same information is included as part of the software itself. This allows a user to refer to the documentation while using the software. In this case the information may be broken into small units, sometimes called help packages, that may appear on the display screen automatically if the user dallies too long between commands.

The purpose of **system documentation** is to describe the software's internal composition so that the software can be maintained later in its life cycle. A major component of system documentation is the source version of all the programs in the system. It is important that these programs be presented in a readable format, which is why software engineers support the use of well-designed, high-level programming languages, the use of comment statements for annotating a program, and a modular design that allows each module to be presented as a coherent unit. In fact, most companies that produce software products have adopted conventions for their employees to follow when writing programs. These include indentation conventions for organizing a program on the written page; naming conventions that establish a distinction between names of different program constructs such as variables, constants, objects, and classes; and documentation conventions to ensure that all programs are sufficiently documented. Such conventions establish uniformity throughout a company's software, which ultimately simplifies the software maintenance process.

Another component of system documentation is a record of the design documents including the software requirements specification and records showing how these specifications were obtained during design. This information is useful during software maintenance because it indicates why the software was implemented as it was—information that reduces the chance that changes made during maintenance will disrupt the integrity of the system.

The purpose of **technical documentation** is to describe how a software system should be installed and serviced (such as adjusting operating parameters, installing updates, and reporting problems back to the software's developer). Technical documentation of software is analogous to the documentation provided to mechanics in the automobile industry. This documentation does not discuss how the car was designed and constructed (analogous to system documentation), nor does it explain how to drive the car and operate its heating/cooling system (analogous to user documentation). Instead, it describes how to service the car's components, for example, how to replace the transmission or how to track down an intermittent electrical problem.

The distinction between technical documentation and user documentation is blurred in the PC arena because the user is often the person who also installs and services the software. However, in multiuser environments, the distinction is sharper. Therefore, technical documentation is intended for the system administrator who

Copyright Virtual University of Pakistan

is responsible for servicing all the software under his or her jurisdiction, allowing the users to access the software packages as abstract tools.

Copyright Virtual University of Pakistan

Module 144

144. Software Engineering: Human Machine Interface

One of the tasks during requirements analysis is to define how the proposed software system will interact with its environment. In this section we consider topics associated with this interaction when it involves communicating with humans—a subject with profound significances. After all, humans should be allowed to use a software system as an abstract tool. This tool should be easy to apply and designed to minimize (ideally eliminate) communication errors between the system and its human users. This means that the system's interface should be designed for the convenience of humans rather than merely the expediency of the software system.

The importance of good interface design is further emphasized by the fact that a system's interface is likely to make a stronger impression on a user than any other system characteristic. After all, a human tends to view a system in terms of its usability, not in terms of how cleverly it performs its internal tasks. From a human's perspective, the choice between two competing systems is likely to be based on the systems' interfaces. Thus, the design of a system's interface can ultimately be the determining factor in the success or failure of a software engineering project.

For these reasons, the human-machine interface has become an important concern in the requirements stage of software development projects and is a growing subfield of software engineering. In fact, some would argue that the study of human-machine interfaces is an entire field in its own right.

A beneficiary of research in this field is the smartphone interface. In order to attain the goal of a convenient pocket-sized device, elements of the traditional human-machine interface (full-sized keyboard, mouse, scroll bars, menus) are being replaced with new approaches; such as gestures performed on a touch screen, voice commands, and virtual keyboards with advanced auto-completion of words and phrases. While these represent significant progress, most smartphone users would argue that there is plenty of room for further innovation.

Research in human-machine interface design draws heavily from the areas of engineering called **ergonomics,** which deals with designing systems that harmonize with the physical abilities of humans, and **cognetics,** which deals with designing systems that harmonize with the mental abilities of humans. Of the two, ergonomics is the better understood, largely because humans have been interacting physically with machines for centuries. Examples are found in ancient tools, weaponry, and transportation systems. Much of this history is self-evident; however, at times the application of ergonomics has been counterintuitive. An often-cited example is the design of the typewriter keyboard (now reincarnated as the computer keyboard) in which the keys were intentionally arranged to reduce a typist's speed so that the mechanical system of levers used in the early machines would not jam. Mental interaction with machines, in contrast, is a relatively new phenomenon, and thus, it is cognetics that offers the higher potential for fruitful research and enlightening insights. Often the findings are interesting in their subtlety. For example, humans form habits—a trait that, on the surface, is good because it can increase efficiency. But habits can also lead to errors, even when the design of an interface intentionally addresses the problem. Consider the process of a human asking a typical operating system to delete a file. To avoid unintentional deletions, most interfaces respond to such a request by asking the user to confirm the request—perhaps via a message such as, "Do you really want to delete this file?" At first glance, this confirmation requirement would seem to resolve any problem of unintentional deletions. However, after using the system for an extended period, a human develops the habit of automatically answering the question with "yes." Thus, the task of deleting a file ceases to be a two-step process consisting of a delete command followed by a thoughtful response to a question. Instead, it becomes a one-step "delete-yes" process, meaning that by the time the human realizes that an incorrect delete request has been submitted, the request has already been confirmed and the deletion has occurred.

Copyright Virtual University of Pakistan

The formation of habits may also cause problems when a human is required to use several application software packages. The interfaces of such packages may be similar yet different. Similar user actions may result in different system responses or similar system responses may require different user actions. In these cases habits developed in one application may lead to errors in the other applications.

Another human characteristic that concerns researchers in human-machine interface design is the narrowness of a human's attention, which tends to become more focused as the level of concentration increases. As a human becomes more engrossed in the task at hand, breaking that focus becomes more difficult. In 1972, a commercial aircraft crashed because the pilots became so absorbed with a landing gear problem (actually, with the process of changing the landing gear indicator light bulb) that they allowed the plane to fly into the ground, even though warnings were sounding in the cockpit.

Less critical examples appear routinely in PC interfaces. For example, a "Caps Lock" light is provided on most keyboards to indicate that the keyboard is in "Caps Lock" mode (i.e., the "Caps Lock" key has been pressed). However, if the key is accidentally pressed, a human rarely notices the status of the light until strange characters begin to appear on the display screen. Even then, the user often puzzles over the predicament for a while until realizing the cause of the problem. In a sense, this is not surprising—the light on the keyboard is not in the user's field of view. However, users often fail to notice indicators placed directly in their line of sight. For example, users can become so engaged in a task that they fail to observe changes in the appearance of the cursor on the display screen, even though their task involves watching the cursor.

Still another human characteristic that must be anticipated during interface design is the mind's limited capacity to deal with multiple facts simultaneously. In an article in *Psychological Review* in 1956, George A. Miller reported research indicating that the human mind is capable of dealing with only about seven details at once. Thus, it is important that an interface be designed to present all the relevant information when a decision is required rather than to rely on the human user's memory. In particular, it would be poor design to require that a human remember precise details from previous screen images. Moreover, if an interface requires extensive navigation among screen images, a human can get lost in the maze. Thus, the content and arrangement of screen images becomes an important design issue. Although applications of ergonomics and cognetics give the field of human- machine interface design a unique flavor, the field also encompasses many of the more traditional topics of software engineering. In particular, the search for metrics is just as important in the field of interface design as it is in the more traditional areas of software engineering. Interface characteristics that have been subjected to measurement include the time required to learn an interface, the time required to perform tasks via the interface, the rate of user-interface errors, the degree to which a user retains proficiency with the interface after periods of nonuse, and even such subjective traits as the degree to which users like the interface.

The **GOMS** (rhymes with "Toms") model, originally introduced in 1954, is representative of the search for metrics in the field of human-machine interface design. The model's underlying methodology is to analyze tasks in terms of user goals (such as delete a word from a text), operators (such as click the mouse but- ton), methods (such as double-click the mouse button and press the delete key), and selection rules (such as choose between two methods of accomplishing the same goal). This, in fact, is the origin of the acronym GOMS—goals, operators, methods, and selection rules. In short, GOMS is a methodology that allows the actions of a human using an interface to be analyzed as sequences of elementary steps (press a key, move the mouse, make a decision). The performance of each elementary step is assigned a precise time period, and thus, by adding the times assigned to the steps in a task, GOMS provides a means of comparing different proposed interfaces in terms of the time each would require when performing similar tasks.

Understanding the technical details of systems such as GOMS is not the purpose of our current study. The point in our case is that GOMS is founded on features of human behavior (moving hands, making decisions, and so on). In fact, the development of GOMS was originally considered a topic in psychology. Thus,

Copyright Virtual University of Pakistan

GOMS reemphasizes the role that human characteristics play in the field of human-machine interface design, even in the topics that are carryovers from traditional software engineering.

The design of human-machine interfaces promises to be an active field of research in the foreseeable future. Many issues dealing with today's GUIs are yet unresolved, and a multitude of additional problems lurk in the use of three-dimensional interfaces that are now on the horizon. Indeed, because these interfaces promise to combine audio and tactile communication with three- dimensional vision, the scope of potential problems is enormous.

Copyright Virtual University of Pakistan

Module 145

145. Software Engineering: Software Ownership and Liability

Most would agree that a company or individual should be allowed to recoup, and profit from, the investment needed to develop quality software. Otherwise, it is unlikely that many would be willing to undertake the task of producing the software our society desires. In short, software developers need a level of ownership over the software they produce.

Legal efforts to provide such ownership fall under the category of **intellectual property** law, much of which is based on the well-established principles of copyright and patent law. Indeed, the purpose of a copyright or patent is to allow the developer of a product to release that product (or portions thereof) to intended parties while protecting his or her ownership rights. As such, the developer of a product (whether an individual or a corporation) will assert his or her ownership by including a copyright statement in all produced works; including requirement specifications, design documents, source code, test plans, and in some visible place within the final product. A copyright notice clearly identifies ownership, the personnel authorized to use the work, and other restrictions. Furthermore, the rights of the developer are formally expressed in legal terms in a **software license.**

A software license is a legal agreement between the owner and user of a software product that grants the user certain permissions to use the product without transferring ownership rights to the intellectual property. These agreements spell out, to a fine level of detail, the rights and obligations of both parties. Thus, it is important to carefully read and understand the terms of the software license before installing and using a software product.

While copyrights and software license agreements provide legal avenues to inhibit outright copying and unauthorized use of software, they are generally insufficient to prevent another party from independently developing a product with a nearly identical function. It is sad that over the years there have been many occasions where the developer of a truly revolutionary software product was unable to capitalize fully on his or her invention (two notable examples are spreadsheets and web browsers). In most of these cases, another company was successful in developing a competitive product that secured a dominant share of the market. A legal path to prevent this intrusion by a competitor is found in patent law.

Patent laws were established to allow an inventor to benefit commercially from an invention. To obtain a patent, the inventor must disclose the details of the invention and demonstrate that it is new, useful, and not obvious to others with similar backgrounds (a requirement that can be quite challenging for software). If a patent is granted, the inventor is given the right to prevent others from making, using, selling, or importing the invention for a limited period of time, which is typically 20 years from the date the patent application was filed.

One drawback to the use of patents is that the process to obtain a patent is expensive and time-consuming, often involving several years. During this time a software product could become obsolete, and until the patent is granted the applicant has only questionable authority to exclude others from appropriating the product.

The importance of recognizing copyrights, software licenses, and patents is paramount in the software engineering process. When developing a software product, software engineers often choose to incorporate software from other products, whether it be an entire product, subset of components, or even portions of source code downloaded over the Internet. However, failure to honor intellectual property rights during this process may lead to huge liabilities and consequences. For example, in 2004, a little-known company, NPT Inc., successfully won a lawsuit against Research in Motion (RIM—the makers of the BlackBerry smartphones) for patent infringement of a few key technologies embedded in RIM's email systems. The

Copyright Virtual University of Pakistan

judgment included an injunction to suspend email services to all BlackBerry users in the United States! RIM eventually reached an agreement to pay NPT a total of $612.5 million, thereby averting a shutdown.

Finally, we should address the issue of liability. To protect themselves against liability, software developers often include disclaimers in the software licenses that state the limitations of their liability. Such statements as "In no event will Company X be liable for any damages arising out of the use of this software" are common. Courts, however, rarely recognize a disclaimer if the plaintiff can show negligence on the part of the defendant. Thus, liability cases tend to focus on whether the defendant used a level of care compatible with the product being produced. A level of care that might be deemed acceptable in the case of developing a word processing system may be considered negligent when developing software to control a nuclear reactor. Consequently, one of the best defenses against software liability claims is to apply sound software engineering principles during the software's development, to use a level of care compatible with the software's application, and to produce and maintain records that validate these endeavors.

Copyright Virtual University of Pakistan

Module 146

146. Data Abstraction: Arrays and Aggregates

Recall that an **array** is a "rectangular" block of data whose entries are of the same type. The simplest form of array is the one-dimensional array, a single row of elements with each position identified by an index. A one-dimensional array with 26 elements could be used to store the number of times each alphabet letter occurs in a page of text, for example. A two-dimensional array consists of multiple rows and columns in which positions are identified by pairs of indices—the first index identifies the row associated with the position; the second index identifies the column. An example would be a rectangular array of numbers representing the monthly sales made by members of a sales force—the entries across each row representing the monthly sales made by a particular member and the entries down each column representing the sales by each member for a particular month. Thus, the entry in the third row and first column would represent the sales made by the third salesperson in January.

In contrast to an array, recall that an **aggregate type** is a block of data items that might be of different types and sizes. The items within the block are usually called **fields.** An example of an aggregate type would be the block of data relating to a single employee, the fields of which might be the employee's name (an array of type character), age (of type integer), and skill rating (of type float). Fields in an aggregate type are usually accessed by field name, rather than by a numerical index number.

Module 147

147. Data Abstraction: List, Stacks and Queues

Another basic data structure is a **list,** which is a collection whose entries are arranged sequentially (Figure 104a). The beginning of a list is called the **head** of the list. The other end of a list is called the **tail.**

Almost any collection of data can be envisioned as a list. For example, text can be envisioned as a list of symbols, a two-dimensional array can be envisioned as a list of rows, and music recorded on a CD can be envisioned as a list of sounds. More traditional examples include guest lists, shopping lists, class enrollment lists, and inventory lists. Activities associated with a list vary depending on the situation. In some cases we may need to remove entries from a list, add new entries to a list, "process" the entries in a list one at a time, change the arrangement of the entries in a list, or perhaps search to see if a particular item is in a list. We will investigate such operations later in this chapter.

By restricting the manner in which the entries of a list are accessed, we obtain two special types of lists known as stacks and queues. A **stack** is a list in which entries are inserted and removed only at the head. An example is a stack of books where physical restrictions dictate that all additions and deletions occur at the top (Figure 104b). Following colloquial terminology, the head of a stack is called the **top** of the stack. The tail of a stack is called its **bottom** or **base.** Inserting a new entry at the top of a stack is called **pushing** an entry. Removing an entry from the top of a stack is called **popping** an entry. Note that the last entry placed on a stack will always be the first entry removed—an observation that leads to a stack being known as a **last-in, first-out,** or **LIFO** (pronounced "LIE-foe") structure.

This LIFO characteristic means that a stack is ideal for storing items that must be retrieved in the reverse order from which they were stored, and thus a stack is often used as the underpinning of backtracking activities. (The term **backtracking** refers to the process of backing out of a system in the opposite order from which the system was entered. A classic example is the process of retracing one's steps in order to find one's way out of a forest.) For instance, consider the underlying structure required to support a recursive process. As each new activation is started, the previous activation must be set aside. Moreover, as each activation is completed, the last activation that was set aside must be retrieved. Thus, if the

Copyright Virtual University of Pakistan

activations are pushed on a stack as they are set aside, then the proper activation will be on the top of the stack each time an activation needs to be retrieved.

A **queue** is a list in which the entries are removed only at the head and new entries are inserted only at the tail. An example is a line, or queue, of people waiting to buy tickets at a theater (Figure 104c)—the person at the head of the queue is served while new arrivals step to the rear (or tail) of the queue. A queue is a **first-in, first-out,** or **FIFO** (pronounced "FIE-foe") structure, meaning that the entries are removed from a queue in the order in which they were stored.

Queues are often used as the underlying structure of a buffer, which is a storage area for the temporary placement of data being transferred from one location to another. As the items of data arrive at the buffer, they are placed at the tail of the queue. Then, when it comes time to forward items to their final destination, they are forwarded in the order in which they appear at the head of the queue. Thus, items are forwarded in the same order in which they arrived.

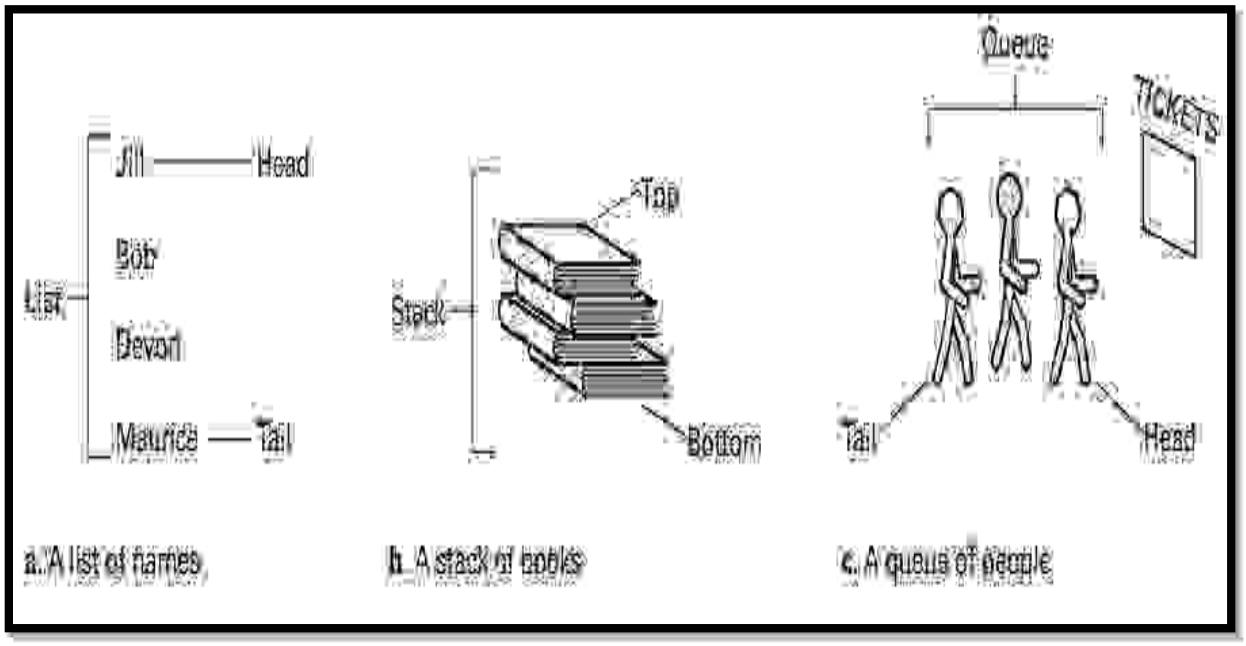


Figure 104: Lists, stacks, and queues

Copyright Virtual University of Pakistan

Module 148

148. Data Abstraction: Trees

A **tree** is a collection whose entries have a hierarchical organization similar to that of an organization chart of a typical company (Figure 105). The president is represented at the top, with lines branching down to the vice presidents, who are followed by regional managers, and so on. To this intuitive definition of a tree structure we impose one additional constraint, which (in terms of an organization chart) is that no individual in the company reports to two different superiors. That is, different branches of the organization do not merge at a lower level. (We have already seen examples of trees in Chapter 6 where they appeared in the form of parse trees.)

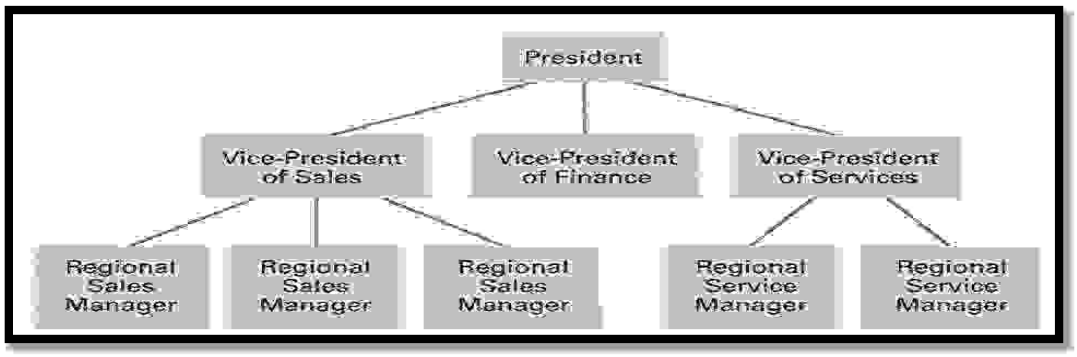


Figure 105: An example of an organization chart

Each position in a tree is called a **node** (Figure 106). The node at the top is called the **root node** (if we turned the drawing upside down, this node would represent the base or root of the tree). The nodes at the other extreme are called **terminal nodes** (or sometimes **leaf nodes**). We often refer to the number of nodes in the longest path from the root to a leaf as the **depth** of the tree. In other words, the depth of a tree is the number of horizontal layers within it.

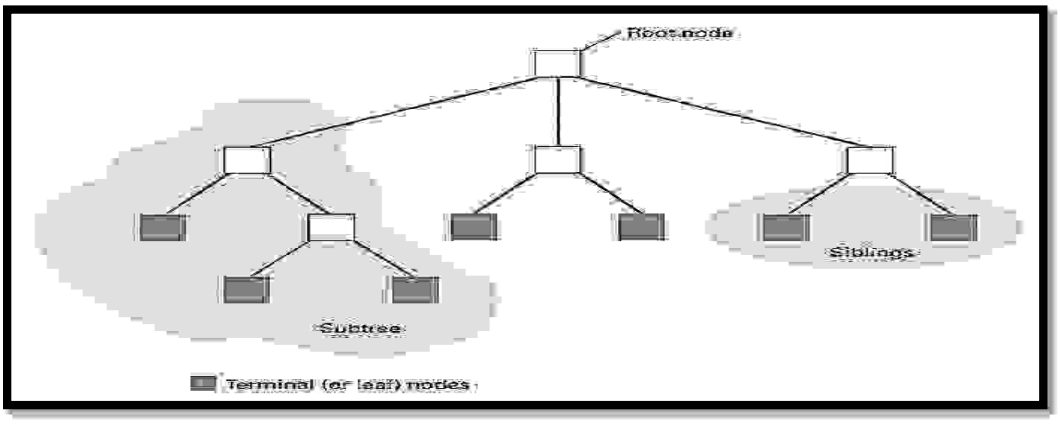


Figure 106: Tree terminology

At times we refer to tree structures as though each node gives birth to those nodes immediately below it. In this sense, we often speak of a node's ancestors or descendants. We refer to its immediate descendants as its **children** and its immediate ancestor as its **parent.** Moreover, we speak of nodes with the same parent as being **siblings.** A tree in which each parent has no more than two children is called a **binary tree.**

Copyright Virtual University of Pakistan

If we select any node in a tree, we find that that node together with the nodes below it also has the structure of a tree. We call these smaller structures **subtrees.** Thus, each child node is the root of a subtree below the child's parent. Each such subtree is called a **branch** from the parent. In a binary tree, we often speak of a node's left branch or right branch in reference to the way the tree is displayed.

Copyright Virtual University of Pakistan

Module 149

149. Data Abstraction: Pointers

Recall that the various cells in a machine's main memory are identified by numeric addresses. Being numeric values, these addresses themselves can be encoded and stored in memory cells. A **pointer** is a storage area that contains such an encoded address. In the case of data structures, pointers are used to record the location where data items are stored. For example, if we must repeatedly move an item of data from one location to another, we might designate a fixed location to serve as a pointer. Then, each time we move the item, we can update the pointer to reflect the new address of the data. Later, when we need to access the item of data, we can find it by means of the pointer. Indeed, the pointer will always "point" to the data.

We have already encountered the concept of a pointer in our study of CPUs in the module 36. There we found that a register called a program counter is used to hold the address of the next instruction to be executed. Thus, the program counter plays the role of a pointer. In fact, another name for a program counter is **instruction pointer.**

As an example of the application of pointers, suppose we have a list of novels stored in a computer's memory alphabetically by title. Although convenient in many applications, this arrangement makes it difficult to find all the novels by a particular author—they are scattered throughout the list. To solve this problem, we can reserve an additional memory cell within each block of cells representing a novel and use this cell as a pointer to another block representing a book by the same author. In this manner the novels with common authorship can be linked in a loop (Figure 8.4). Once we find one novel by a given author, we can find all the others by following the pointers from one book to another.

Many modern programming languages include pointers as a primitive data type. That is, they allow the declaration, allocation, and manipulation of pointers in ways reminiscent of integers and character strings. Using such a language, a programmer can design elaborate networks of data within a machine's memory where pointers are used to link related items to each other.

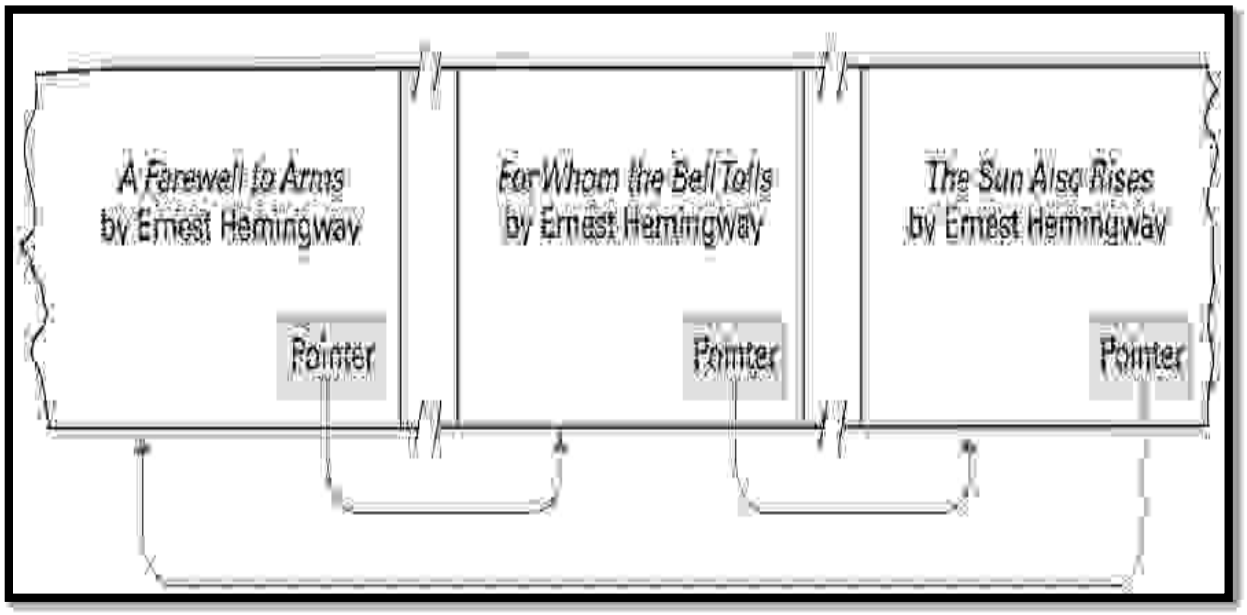


Figure 107: Novels arranged by title but linked according to authorship

Copyright Virtual University of Pakistan

Module 150

150. Database Systems: The Significance of Database Systems

The term **database** refers to a collection of data that is multidimensional in the sense that internal links between its entries make the information accessible from a variety of perspectives. This is in contrast to a traditional file system, sometimes called a **flat file,** which is a one-dimensional storage system, meaning that it presents its information from a single point of view. Whereas a flat file containing information about composers and their compositions might provide a list of compositions arranged by composer, a database might present all the works by a single composer, all the composers who wrote a particular type of music, and perhaps the composers who wrote variations of another composer's work.

Historically, as computing machinery found broader uses in information management, each application tended to be implemented as a separate system with its own collection of data. Payroll was processed using the payroll file, the personnel department maintained its own employee records, and inventory was managed via an inventory file. This meant that much of the information required by an organization was duplicated throughout the company, while many different but related items were stored in separate systems. In this setting, database systems emerged as a means of integrating the information stored and maintained by a particular organization (Figure 108). With such a system, the same sales data could be used to produce restocking orders; create reports on market trends, direct advertisements, and product announcements to customers who are most likely to respond favorably to such information; and generate bonus checks for members of the sales force.

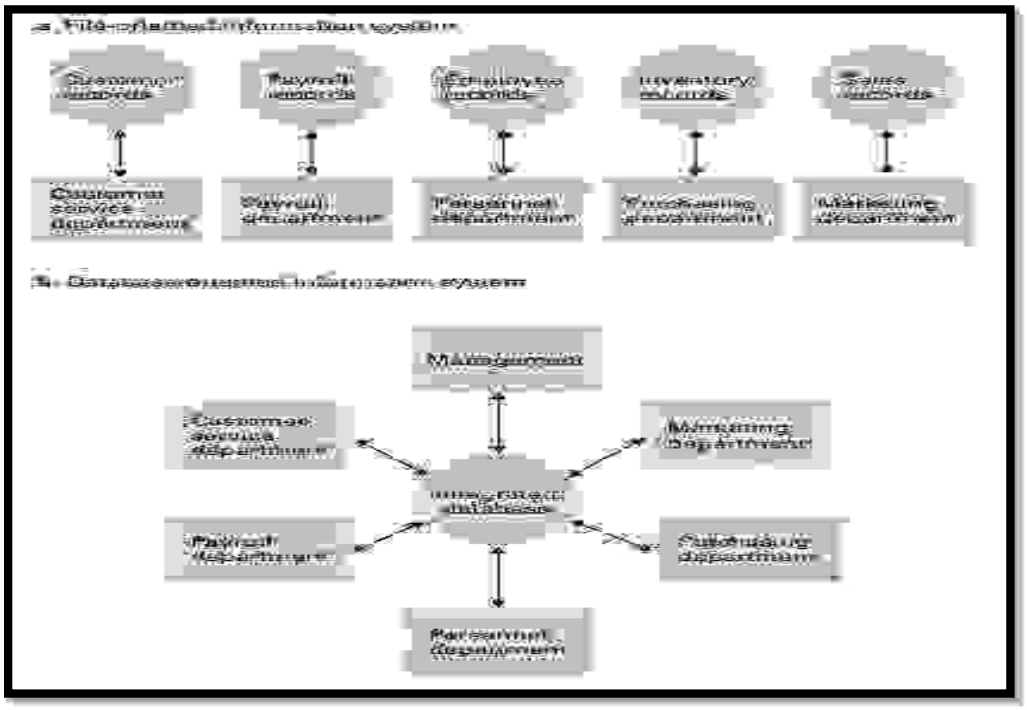


Figure 108: A file versus a database organization

Such integrated pools of information provided a valuable resource with which management decisions could be made, assuming the information could be accessed in a meaningful way. In turn, database research focused on developing techniques by which the information in a database could be brought to the decision-

Copyright Virtual University of Pakistan

making process. Much progress has been made in this regard. Today, database technology, combined with data mining techniques, is an important management tool, allowing the management of an organization to extract pertinent information from enormous amounts of data covering all aspects of the organization and its environment.

Moreover, database systems have become the underlying technology that supports many of the more popular sites on the World Wide Web. The underlying theme of sites such as Google, eBay, and Amazon is to provide an interface between clients and databases. To respond to a client's request, the server interrogates a database, organizes the results in the form of a Web page, and sends that page to the client. Such Web interfaces have popularized a new role for database technology in which a database is no longer a means of storing a company's records but, instead, is the company's product. Indeed, by combining database technology with Web interfaces, the Internet has become a major world-wide information source.

Copyright Virtual University of Pakistan

Module 151

151. Database Systems: Role of Schema

Among the disadvantages of the proliferation of database technology is the potential of sensitive data being accessed by unauthorized personnel. Someone placing an order at a company's website should not have access to the company's financial data; similarly, an employee in a company's benefits department may need access to the company's employee records but should not have access to the corporation's inventory or sales records. Thus, the ability to control access to the information in the database is as important as the ability to share it.

To provide different users access to different information within a database, database systems often rely on schemas and subschemas. A **schema** is a description of the entire database structure that is used by the database software to maintain the database. A **subschema** is a description of only that portion of the database pertinent to a particular user's needs. For example, a schema for a university database would indicate that each student record contains such items as the current address and phone number of that student in addition to the student's academic record. Moreover, it would indicate that each student record is linked to the record of the student's faculty adviser. In turn, the record for each faculty member would contain the person's address, employment history, and so on. Based on this schema, a linkage system would be maintained that ultimately connected the information about a student to the employment history of a faculty member.

To keep the university's registrar from using this linkage to obtain privileged information about the faculty, the registrar's access to the database must be restricted to a subschema whose description of the faculty records does not include employment history. Under this subschema, the registrar could find out which faculty member is a particular student's adviser but could not obtain access to additional information about that faculty member. In contrast, the subschema for the payroll department would provide the employment history of each faculty member but would not include the linkage between students and advisers. Thus the payroll department could modify a faculty member's salary but could not obtain the names of the students advised by that person.

Copyright Virtual University of Pakistan

Module 152

152. Database Systems: Database Management Systems

A typical database application involves multiple software layers, which we will group into two major layers—an application layer and a database management layer (Figure 109). The application software handles the communication with the user of the database and may be quite complex, as exemplified by applications in which users access a database by means of a website. In that case the entire application layer consists of clients throughout the Internet and a server that uses the database to fill the requests from the clients.

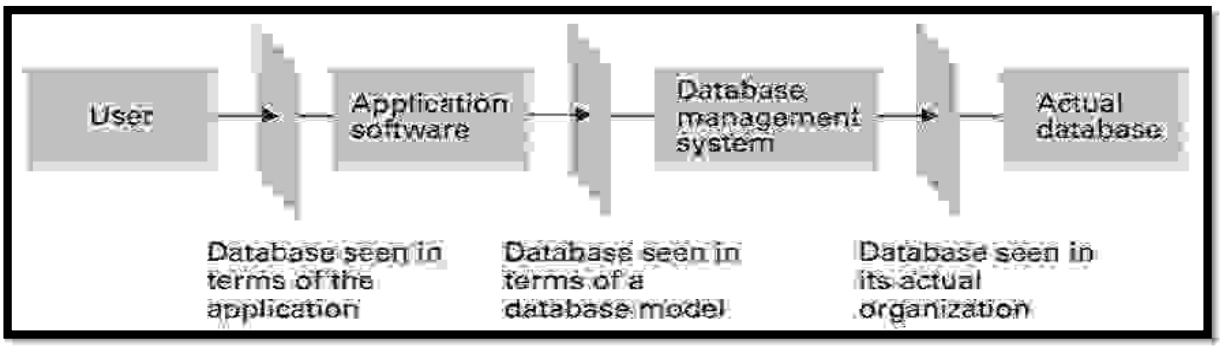


Figure 109: The conceptual layers of a database implementation

Note that the application software does not directly manipulate the data- base. The actual manipulation of the database is accomplished by the **database management system (DBMS).** Once the application software has determined what action the user is requesting, it uses the DBMS as an abstract tool to obtain the results. If the request is to add or delete data, it is the DBMS that actually alters the database. If the request is to retrieve information, it is the DBMS that performs the required searches.

This dichotomy between the application software and the DBMS has sev- eral benefits. One is that it allows for the construction and use of abstract tools, which we have repeatedly found to be a major simplifying concept in software design. If the details of how the database is actually stored are isolated within the DBMS, the design of the application software can be greatly simplified. For instance, with a well-designed DBMS, the application software does not have to be concerned with whether the database is stored on a single machine or scattered among many machines within a network as a **distributed database.** Instead, the DBMS would deal with these issues, allowing the application soft- ware to access the database without concern for where the data is actually stored.

A second advantage of separating the application software from the DBMS is that such an organization provides a means for controlling access to the database. By dictating that the DBMS performs all access to the database, the DBMS can enforce the restrictions imposed by the various subschemas. In particular, the DBMS can use the entire database schema for its internal needs but can require that the application software employed by each user remain within the bounds described by that user's subschema.

Still another reason for separating the user interface and actual data manipulation into two different software layers is to achieve **data independence**—the ability to change the organization of the database itself without changing the application software. For example, the personnel department might need to add an additional field to each employee's record to indicate whether the corresponding employee chose to participate in the company's new health insurance program. If the application software dealt directly with the database, such a change in the data's format could require modifications to all application programs dealing with the database. As a result, the change instigated by the personnel department might cause

Copyright Virtual University of Pakistan

changes to the payroll program as well as to the program for printing mailing labels for the company's newsletter.

The separation between application software and a DBMS removes the need for such reprogramming. To implement a change in the database required by a single user, one needs to change only the overall schema and the subschemas of those users involved in the change. The subschemas of all the other users remain the same, so their application software, which is based on the unaltered subschemas, does not need to be modified.

Copyright Virtual University of Pakistan

Module 153

153. Database Systems: Relational Database model

We have repeatedly seen how abstraction can be used to hide internal complexities. Database management systems provide yet another example. They hide the complexities of a database's internal structure, allowing the user of the database to imagine that the information stored in the database is arranged in a more useful format. In particular, a DBMS contains routines that translate commands stated in terms of a conceptual view of the database into the actions required by the actual data storage system. This conceptual view of the database is called a **database model.**

Relational database model portrays data as being stored in rectangular tables, called **relations,** which are similar to the format in which information is displayed by spreadsheet programs. For example, the relational model allows information regarding the employees of a firm to be represented by a relation such as that shown in Figure 110.

A row in a relation is called a **tuple** (some say "TOO-pul," others say "TUH-pul"). In the relation of Figure 110, tuples consist of the information about a particular employee. Columns in a relation are referred to as **attributes** because each entry in a column describes some characteristic, or attribute, of the entity represented by the corresponding tuple.

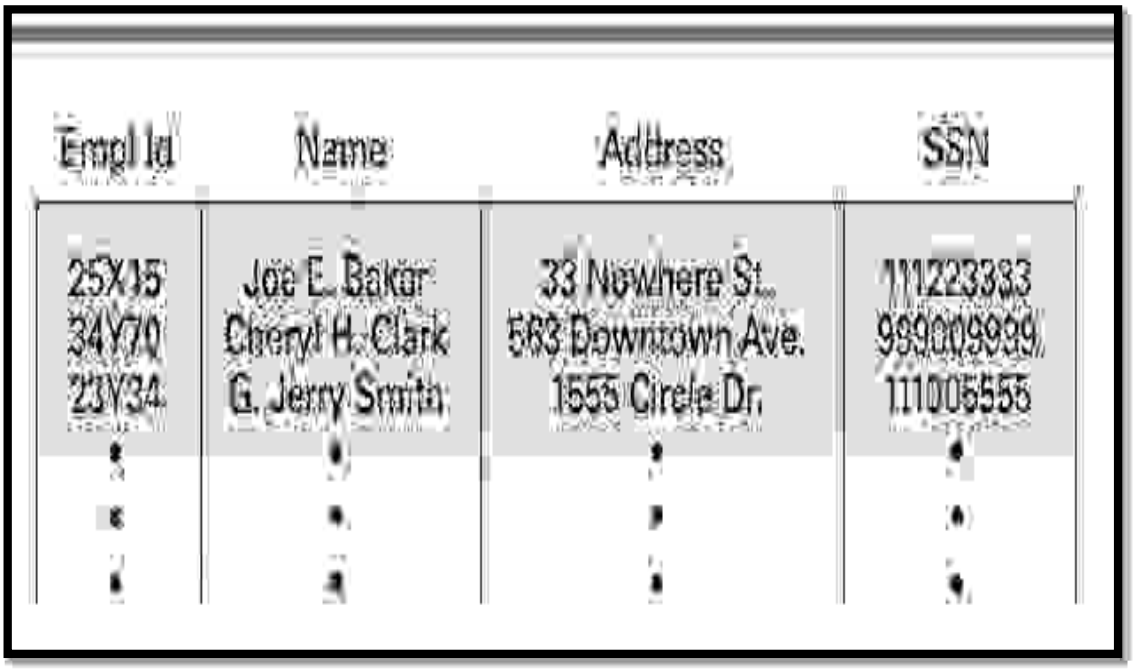


Figure 110: A relation containing employee information

Copyright Virtual University of Pakistan

Module 154

154. Database Systems: Issues of Relational Designs

A pivotal step in designing a relational database is to design the relations making up the database. Although this might appear to be a simple task, many subtleties are waiting to trap the unwary designer.

Suppose that in addition to the information contained in the relation of Figure 110, we want to include information about the jobs held by the employees. We might want to include a job history associated with each employee that consists of such attributes as job title (secretary, office manager, floor supervisor), a job identification code (unique to each job), the skill code associated with each job, the department in which the job exists, and the period during which the employee held the job in terms of a starting date and termination date. (We use an asterisk as the termination date if the job represents the employee's current position.)

One approach to this problem is to extend the relation in Figure 110 to include these attributes as additional columns in the table, as shown in Figure 111. However, close examination of the result reveals several problems. One is a lack of efficiency due to redundancy. The relation no longer contains one tuple for each employee but rather one tuple for each assignment of an employee to a job. If an employee has advanced in the company through a sequence of several jobs, several tuples in the new relation must contain the same information about the employee (name, address, identification number, and Social Security number). For example, the personal information about Baker and Smith is repeated because they have held more than one job. Moreover, when a particular position has been held by numerous employees, the department associated with that job along with the appropriate skill code must be repeated in each tuple representing an assignment of the job. For example, the description of the floor manager job is duplicated because more than one employee has held this position.

Empl Id	Name	Address	SSN	Job Id	Job Title	Skill Code	Dept	Start Date	Term Date
25X15	Joe E. Baker	33 Nowhere St.	111223333	F5	Floor manager	FM3	Sales	9-1-2009	9-30-2010
25X15	Joe E Baker	33 Nowhere St.	111223333	D7	Dept. head	K2	Sales	10-1-2010	*
34Y70	Cheryl H. Clark	563 Downtown Ave.	999009999	F5	Floor manager	FM3	Sales	10-1-2009	*
23Y34	G. Jerry Smith	1555 Circle Dr.	111005555	S25X	Secretary	T5	Personnel	3-1-1989	4-30-2010
23Y34	G. Jerry Smith	1555 Circle Dr.	111005555	S28Z	Secretary	T6	Accounting	5-1-2010	*
.	.	.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.	.	.

Figure 111: A relation containing redundancy

Another, perhaps more serious, problem with our extended relation surfaces when we consider deleting information from the database. Suppose for example that Joe E. Baker is the only employee to hold the job identified as D7. If he were to leave the company and be deleted from the database represented in Figure 111, we would lose the information about job D7. After all, the only tuple containing the fact that job D7 requires a skill level of K2 is the tuple relating to Joe Baker.

You might argue that the ability to erase only a portion of a tuple could solve the problem, but this would in turn introduce other complications. For instance, should the information relating to job F5 also be retained in a partial tuple, or does this information reside elsewhere in the relation? Moreover, the temptation to use partial tuples is a strong indication that the design of the database can be improved.

Copyright Virtual University of Pakistan

The cause of all these problems is that we have combined more than one concept in a single relation. As proposed, the extended relation in Figure 111 contains information dealing directly with employees (name, identification number, address, Social Security number), information about the jobs available in the company (job identification, job title, department, skill code), and information regarding the relationship between employees and jobs (start date, termination date). On the basis of this observation, we can solve our problems by redesigning the system using three relations—one for each of the preceding categories. We can keep the original relation in Figure 110 (which we now call the EMPLOYEE relation) and insert the additional information in the form of the two new relations called JOB and ASSIGNMENT, which produces the database in Figure 112

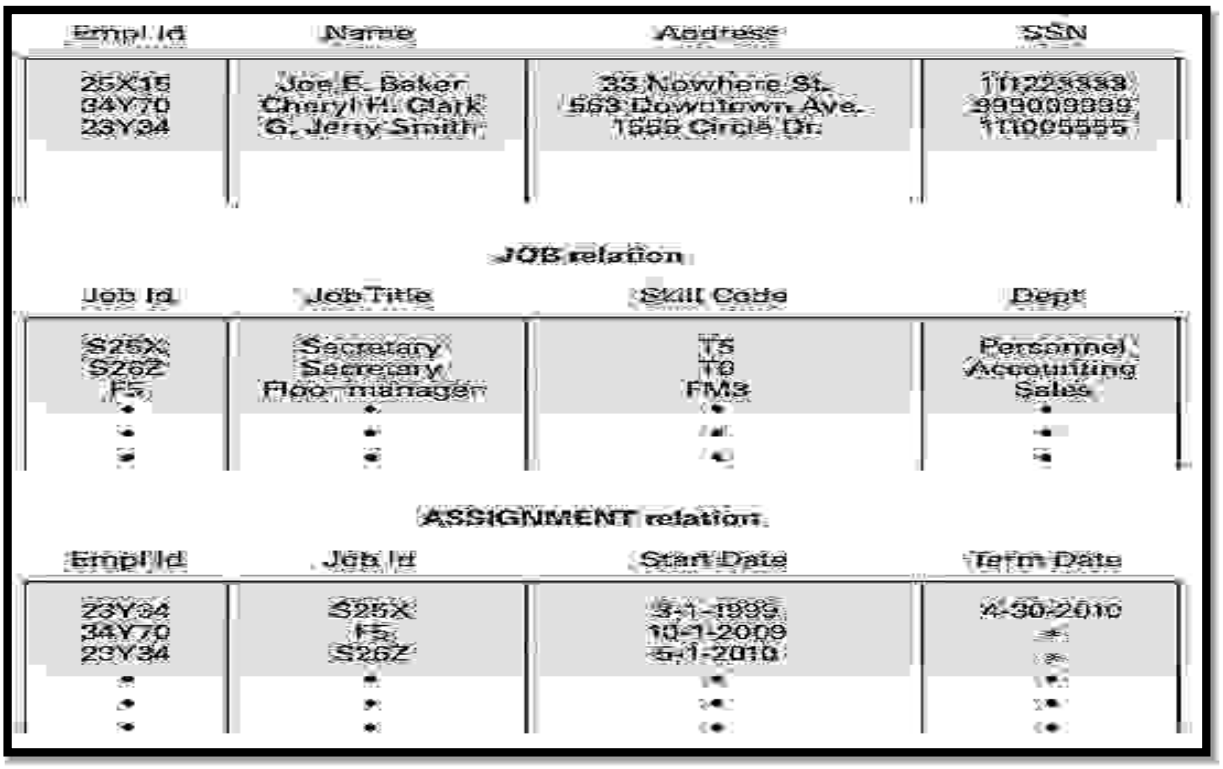


Figure 112: An employee database consisting of three relations

Copyright Virtual University of Pakistan

Module 155

155. Database Systems: Relational operators

Now that you have a basic understanding of how data can be organized in terms of the relational model, it is time to see how information can be extracted from a database consisting of relations. We begin with a look at some operations that we might want to perform on relations.

At times we need to select certain tuples from a relation. To retrieve the information about an employee, we must select the tuple with the appropriate identification attribute value from the EMPLOYEE relation, or to obtain a list of the job titles in a certain department, we must select the tuples from the JOB relation having that department as their department attribute. The result of such a process is another relation consisting of the tuples selected from the parent relation. The outcome of selecting information about a particular employee results in a relation containing only one tuple from the EMPLOYEE relation. The outcome of selecting the tuples associated with a certain department results in a relation that probably contains several tuples from the JOB relation.

Copyright Virtual University of Pakistan

Module 156

156. Database Systems: Select Operation

One operation we might want to perform on a relation is to select tuples possessing certain characteristics and to place these selected tuples in a new relation. To express this operation, we adopt the syntax

NEW <- SELECT from EMPLOYEE where EmplId = '34Y70'

The semantics of this statement is to create a new relation called NEW containing those tuples (there should be only one in this case) from the relation EMPLOYEE whose EmplId attribute equals 34Y70 (Figure 113).

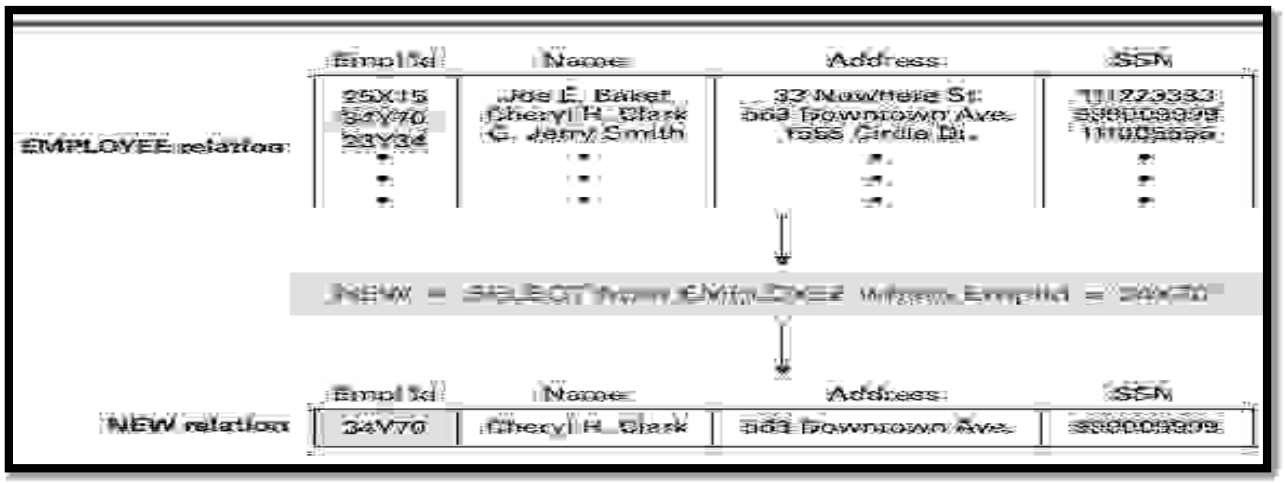


Figure 113: The SELECT operation

Copyright Virtual University of Pakistan

Module 157

157. Database Systems: project Operation

In contrast to the SELECT operation, which extracts rows from a relation, the PROJECT operation extracts columns. Suppose, for example, that in searching for the job titles in a certain department, we had already selected the tuples from the JOB relation that pertained to the target department and placed these tuples in a new relation called NEW1. The list we are seeking is the JobTitle column within this new relation. The PROJECT operation allows us to extract this column (or columns if required) and place the result in a new relation. We express such an operation as

NEW2 <- PROJECT JobTitle from NEW1

The result is the creation of another new relation (called NEW2) that contains the single column of values from the JobTitle column of relation NEW1.

As another example of the PROJECT operation, the statement

MAIL <- PROJECT Name, Address from EMPLOYEE

can be used to obtain a listing of the names and addresses of all employees. This list is in the newly created (two-column) relation called MAIL (Figure 114).

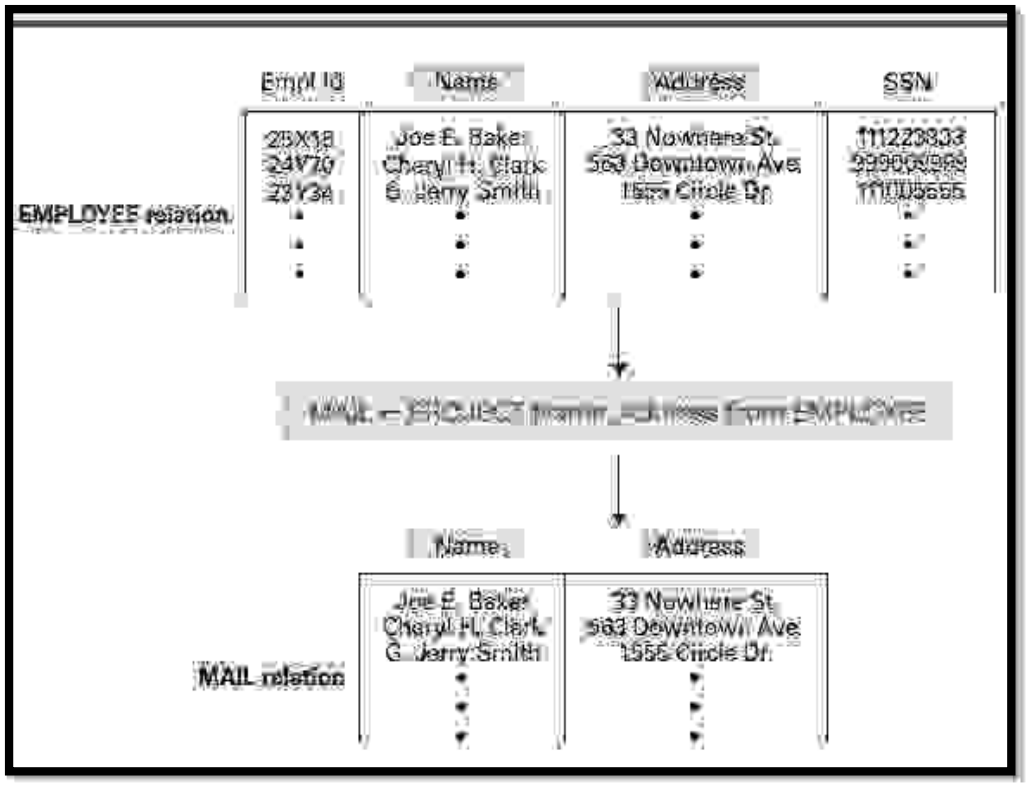


Figure 114: The PROJECT operation

Copyright Virtual University of Pakistan

Module 158

158. Database Systems: Join Operation

Another operation used in conjunction with relational databases is the JOIN operation. It is used to combine different relations into one relation. The JOIN of two relations produces a new relation whose attributes consist of the attributes from the original relations (Figure 115). The names of these attributes are the same as those in the original relations except that each is prefixed by the relation of its origin. (If relation A containing attributes V and W is JOINed with relation B containing attributes X, Y, and Z, then the result has five attributes named A.V, A.W, B.X, B.Y, and B.Z.) This naming convention ensures that the attributes in the new relation have unique names, even though the original relations might have attribute names in common. The tuples (rows) of the new relation are produced by concatenating tuples from the two original relations (see again Figure 115). Which tuples are actually joined to form tuples in the new relation is determined by the condition under which the JOIN is constructed? One such condition is that designated attributes have the same value. This, in fact, is the case represented in Figure 115, where we demonstrate the result of executing the statement

C <- JOIN A and B where A.W = B.X

In this example, a tuple from relation A should be concatenated with a tuple from relation B in exactly those cases where the attributes W and X in the two tuples are equal. Thus the concatenation of the tuple (r, 2) from relation A with the tuple (2, m, q) from relation B appears in the result because the value of attribute W in the first equals the value of attribute X in the second. On the other hand, the result of concatenating the tuple (r, 2) from relation A with the tuple (5, g, p) from relation B does not appear in the final relation because these tuples do not share common values in attributes W and X.

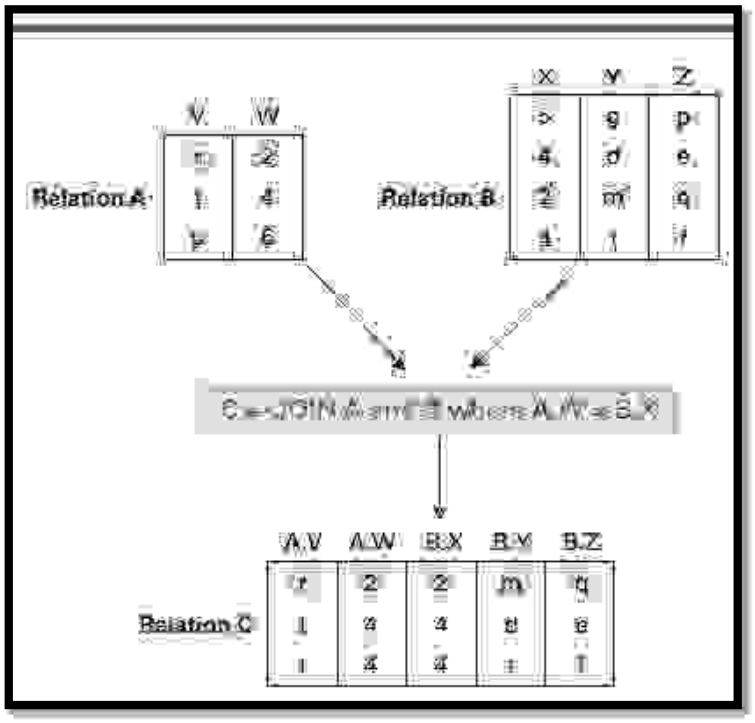


Figure 115: The Join Operation

As another example, Figure 116 represents the result of executing the statement

Copyright Virtual University of Pakistan

C <- JOIN A and B where A.W < B.X

Note that the tuples in the result are exactly those in which attribute W in relation

A is less than attribute X in relation B.

Let us now see how the JOIN operation can be used with the database of Figure 112 to obtain a listing of all employee identification numbers along with the department in which each employee works. Our first observation is that the information required is distributed over more than one relation, and thus the process of retrieving the information must entail more than SELECTions and PROJECTions. In fact, the tool we need is the statement

NEW1 <-JOIN ASSIGNMENT and JOB

where ASSIGNMENT.JobId = JOB.JobId

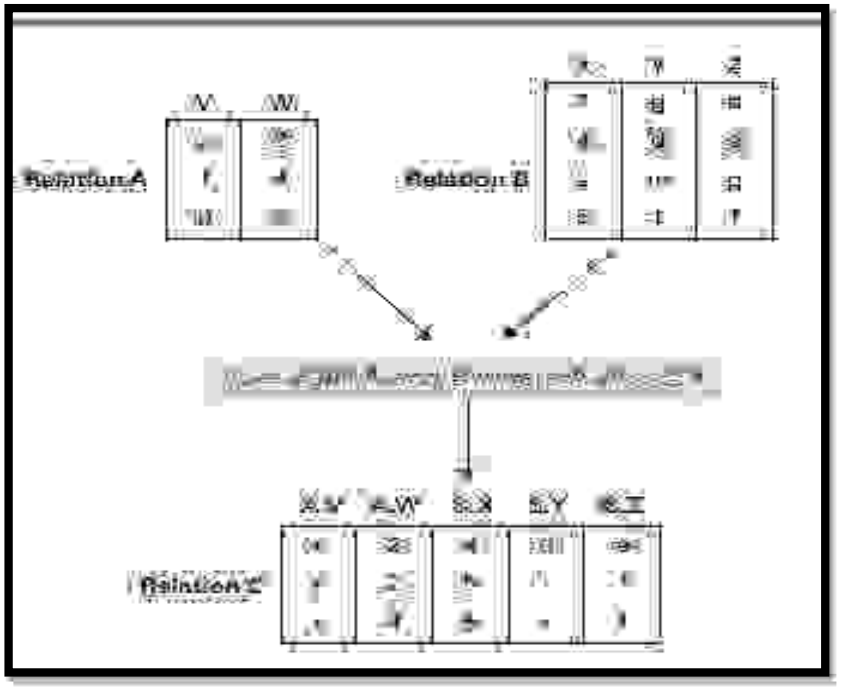


Figure 116: Another example of the JOIN operation

that produces the relation NEW1, as shown in Figure 117. From this relation, our problem can be solved by first SELECTing those tuples in which ASSIGNMENT. TermDate equals '*' (which indicates “still employed”) and then PROJECTing the attributes ASSIGNMENT.EmplId and JOB.Dept. In short, the information we need can be obtained from the database in Figure 112 by executing the sequence

NEW1 <-JOIN ASSIGNMENT and JOB

where ASSIGNMENT.JobId = JOB.JobId

NEW2 <- SELECT from NEW1 where ASSIGNMENT.TermDate = '*'

LIST <- PROJECT ASSIGNMENT.EmplId, JOB.Dept from NEW2

Copyright Virtual University of Pakistan

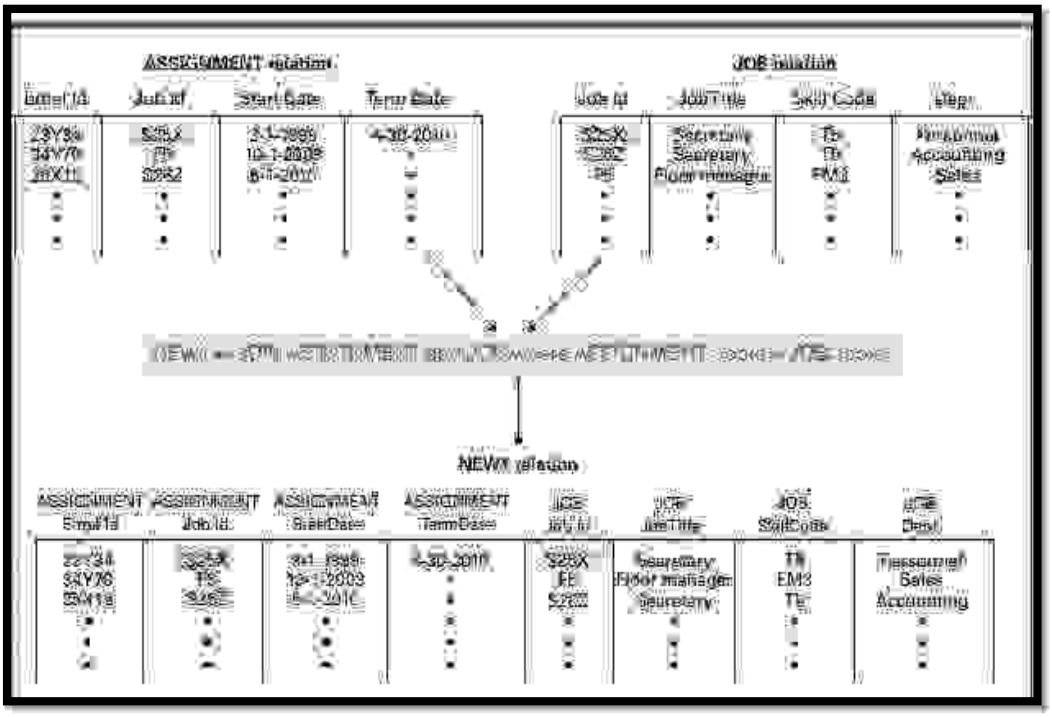


Figure 117: An application of the JOIN operation

Copyright Virtual University of Pakistan

Module 159

159. Database Systems: Object Oriented Databases

Another database model is based on the object-oriented paradigm. This approach leads to an object-oriented database consisting of objects that are linked to each other to reflect their relationships. For example, an object-oriented implementation of the employee database from the previous section could consist of three classes (types of objects): Employee, Job, and Assignment. An object from the Employee class could contain such entries as EmplId, Name, Address, and SSNum; an object from the class Job could contain such entries as JobId, JobTitle, SkillCode, and Dept; and each object from the class Assignment could contain entries such as StartDate and TermDate.

A conceptual representation of such a database is shown in Figure 118 where the links between the various objects are represented by lines connecting the related objects. If we focus on an object of type Employee, we find it linked to a collection of objects of type Assignment representing the various assignments that that particular employee has held. In turn, each of these objects of type Assignment is linked to an object of type Job representing the job associated with that assignment. Thus, all the assignments of an employee can be found by following the links from the object representing that employee. Similarly, all the employees who have held a particular job can be found by following the links from the object representing that job.

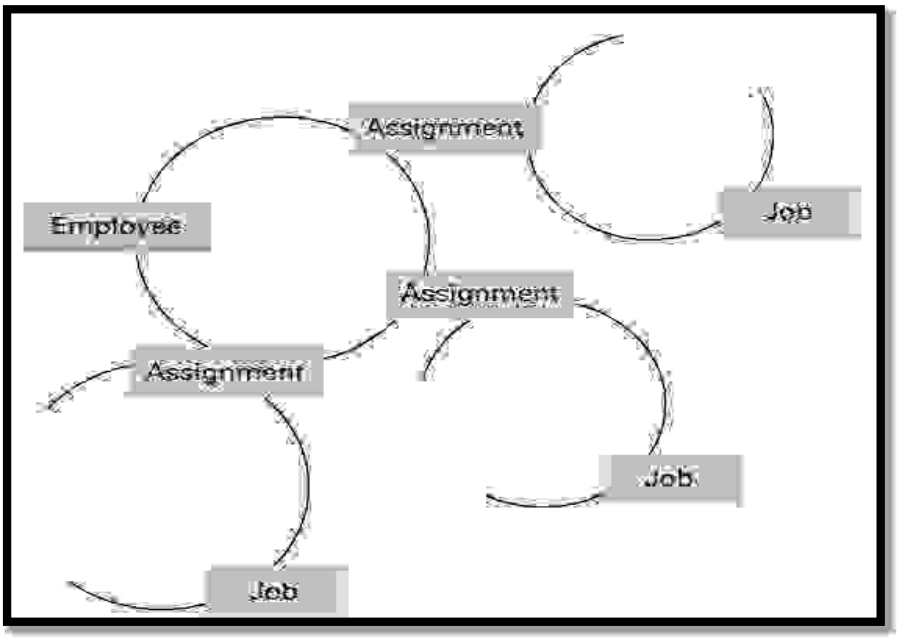


Figure 118: The associations between objects in an object-oriented database

The links between objects in an object-oriented database are normally maintained by the DBMS, so the details of how these links are implemented are not a concern of the programmer writing application software. Instead, when a new object is added to the database, the application software merely specifies the other objects to which it should be linked. The DBMS then creates any linkage system that might be required to record these associations. In particular, a DBMS might link the objects representing the assignments of a given employee in a manner similar to a linked list.

Another task of an object-oriented DBMS is to provide permanent storage for the objects entrusted to it—a requirement that might seem obvious but is inherently distinct from the manner in which objects are normally treated. Normally, when an object-oriented program is executed, the objects created during the program's execution are discarded when the program terminates. In this sense the objects are considered

Copyright Virtual University of Pakistan

transient. But objects that are created and added to a database must be saved after the program that created them terminates. Such objects are said to be **persistent.** Thus, creating persistent objects is a significant departure from the norm.

Proponents of object-oriented databases offer numerous arguments to show why the object-oriented approach to database design is better than the relational approach. One is that the object-oriented approach allows the entire software sys- tem (application software, DBMS, and the database itself) to be designed in the same paradigm. This is in contrast to the historically common practice of using an imperative programming language to develop application software for interrogating a relational database. Inherent in such a task is the clash between imperative and relational paradigms. This distinction is subtle at our level of study, but the difference has been the source of many software errors over the years. Even at our level, we can appreciate that an object-oriented database combined with an objected-oriented application program produces a homogeneous image of objects communicating with each other throughout the system. On the other hand, a relational database combined with an imperative application program conjures an image of two inherently different organizations trying to find a common interface. To appreciate another advantage that object-oriented databases have over their relational counterparts, consider the problem of storing employee names in a relational database. If an entire name is stored as a single attribute in a relation, then inquiries regarding only surnames are awkward. However, if the name is stored as individual attributes, such as first name, middle name, and surname, then the number of attributes becomes problematic because not all names con- form to a specific structure—even when the population is restricted to a single culture. In an object-oriented database, these issues can be hidden within the object that holds the employee's name. An employee's name can be stored as an intelligent object that is capable of reporting the related employee's name in a variety of formats. Thus, from outside these objects, it would be just as easy to deal with only surnames as with entire names, maiden names, or nicknames. The details involved with each perspective would be encapsulated within the objects. This ability to encapsulate the technicalities of different data formats is advantageous in other cases as well. In a relational database, the attributes in a relation are part of the overall design of the database, and thus the types associated with these attributes permeate the entire DBMS. (Variables for temporary storage must be declared to be the appropriate type, and functions for manipulating data of the various types must be designed.) Thus, extending a relational database to include attributes of new types (audio and video) can be problematic. In particular, a variety of functions throughout the database design might need to be expanded to incorporate these new data types. In an object-oriented design, however, the same functions used to retrieve an object representing an employee's name can be used to retrieve an object representing a motion picture because the distinctions in type can be hidden within the objects involved. Thus, the object-oriented approach appears to be more compatible with the construction of multimedia databases—a feature that is already proving to be a great advantage.

Still another advantage the object-oriented paradigm offers to database design is the potential for storing intelligent objects rather than merely data. That is, an object can contain methods describing how it should respond to messages regarding its contents and relationships. For example, each object of the class Employee in Figure 118 could contain methods for reporting and updating the information in the object as well as a method for reporting that employee's job history and perhaps a method for changing that employee's job assignment. Likewise, each object from the Job class could have a method for reporting the specifics of the job and perhaps a method for reporting those employees who have held that particular job. Thus, to retrieve an employee's job history, we would not need to construct an elaborate function. Instead, we could merely ask the appropriate employee object to report its job history. This ability to construct databases whose components respond intelligently to inquiries offers an exciting array of possibilities beyond those of more traditional relational databases.

Copyright Virtual University of Pakistan

Module 160

160. Database Systems: Maintaining DB Integrity

Inexpensive database management systems for personal use are relatively simple systems. They tend to have a single objective—to shield the user from the technical details of the database implementation. The databases maintained by these systems are relatively small and generally contain information whose loss or corruption would be inconvenient rather than disastrous. When a problem does arise, the user can usually correct the erroneous items directly or reload the database from a backup copy and manually make the modifications required to bring that copy up to date. This process might be inconvenient, but the cost of avoiding the inconvenience tends to be greater than the inconvenience itself. In any case, the inconvenience is restricted to only a few people, and any financial loss is generally limited.

In the case of large, multiuser, commercial database systems, however, the stakes are much higher. The cost of incorrect or lost data can be enormous and can have devastating consequences. In these environments, a major role of the DBMS is to maintain the database's integrity by guarding against problems such as operations that for some reason are only partially completed or different operations that might interact inadvertently to cause inaccurate information in the database.

Copyright Virtual University of Pakistan

Module 161

161. Database Systems: The Commit/Rollback Protocol

A single transaction, such as the transfer of funds from one bank account to another, the cancellation of an airline reservation, or the registration of a student in a university course, might involve multiple steps at the database level. For example, a transfer of funds between bank accounts requires that the balance in one account be decremented and the balance in the other be incremented. Between such steps the information in the database might be inconsistent. Indeed, funds are missing during the brief period after the first account has been decremented but before the other has been incremented. Likewise, when reassigning a passenger's seat on a flight, there might be an instant when the passenger has no seat or an instant when the passenger list appears to be one passenger greater than it actually is.

In the case of large databases that are subject to heavy transaction loads, it is highly likely that a random snapshot will find the database in the middle of some transaction. A request for the execution of a transaction or an equipment malfunction will therefore likely occur at a time when the database is in an inconsistent state.

Let us first consider the problem of a malfunction. The goal of the DBMS is to ensure that such a problem will not freeze the database in an inconsistent state. This is often accomplished by maintaining a log containing a record of each transaction's activities in a nonvolatile storage system, such as a magnetic disk. Before a transaction is allowed to alter the database, the alteration to be performed is first recorded in the log. Thus the log contains a permanent record of each transaction's actions.

The point at which all the steps in a transaction have been recorded in the log is called the **commit point.** It is at this point that the DBMS has the information it needs to reconstruct the transaction on its own if that should become necessary. At this point the DBMS becomes committed to the transaction in the sense that it accepts the responsibility of guaranteeing that the transaction's activities will be reflected in the database. In the case of an equipment malfunction, the DBMS can use the information in its log to reconstruct the transactions that have been completed (committed) since the last backup was made.

If problems should arise before a transaction has reached its commit point, the DBMS might find itself with a partially executed transaction that cannot be completed. In this case the log can be used to **roll back** (undo) the activities actually performed by the transaction. In the case of a malfunction, for instance, the DBMS could recover by rolling back those transactions that were incomplete (non-committed) at the time of the malfunction.

Rollbacks of transactions are not restricted, however, to the process of recovering from equipment malfunctions. They are often a part of a DBMS's normal operation. For example, a transaction might be terminated before it has completed all its steps because of an attempt to access privileged information, or it might be involved in a deadlock in which competing transactions find themselves waiting for data being used by each other. In these cases, the DBMS can use the log to roll back a transaction and thus avoid an erroneous database due to incomplete transactions.

To emphasize the delicate nature of DBMS design, we should note that there are subtle problems lurking within the rollback process. The rolling back of one transaction might affect database entries that have been used by other transactions. For example, the transaction being rolled back might have updated an account balance, and another transaction might have already based its activities on this updated value. This might mean that these additional transactions must also be rolled back, which might adversely affect still other transactions. The result is the problem known as **cascading rollback.**

Copyright Virtual University of Pakistan

Module 162

162. Database Systems: Locking

We now consider the problem of a transaction being executed while the database is in a state of flux from another transaction, a situation that can lead to inadvertent interaction between the transactions and produce erroneous results. For instance, the problem known as the **incorrect summary problem** can arise if one transaction is in the middle of transferring funds from one account to another when another transaction tries to compute the total deposits in the bank. This could result in a total that is either too large or too small depending on the order in which the transfer steps are performed. Another possibility is known as the **lost update problem,** which is exemplified by two transactions, each of which makes a deduction from the same account. If one transaction reads the account's current balance at the point when the other has just read the balance but has not yet calculated the new balance, then both transactions will base their deductions on the same initial balance. In turn, the effect of one of the deductions will not be reflected in the database.

To solve such problems, a DBMS could force transactions to execute in their entirety on a one-at-a-time basis by holding each new transaction in a queue until those preceding it have completed. But a transaction often spends a lot of time waiting for mass storage operations to be performed. By inter- weaving the execution of transactions, the time during which one transaction is waiting can be used by another transaction to process data it has already retrieved. Most large database management systems therefore contain a scheduler to coordinate time-sharing among transactions in much the same way that a multiprogramming operating system coordinates interweaving of processes.

To guard against such anomalies as the incorrect summary problem and the lost update problem, these schedulers incorporate a **locking protocol** in which the items within a database that are currently being used by some transaction are marked as such. These marks are called locks; marked items are said to be locked. Two types of locks are common—**shared locks** and **exclusive locks.** They correspond to the two types of access to data that a transaction might require—shared access and exclusive access. If a transaction is not going to alter a data item, then it requires shared access, meaning that other transactions are also allowed to view the data. However, if the transaction is going to alter the item, it must have exclusive access, meaning that it must be the only transaction with access to that data.

In a locking protocol, each time a transaction requests access to a data item, it must also tell the DBMS the type of access it requires. If a transaction requests shared access to an item that is either unlocked or locked with a shared lock, that access is granted, and the item is marked with a shared lock. If, however, the requested item is already marked with an exclusive lock, the additional access is denied. If a transaction requests exclusive access to an item, that request is granted only if the item has no lock associated with it. In this manner, a transaction that is going to alter data protects that data from other transactions by obtaining exclusive access, whereas several transactions can share access to an item if none of them are going to change it. Of course, once a transaction is finished with an item, it notifies the DBMS, and the associated lock is removed.

Various algorithms are used to handle the case in which a transaction's access request is rejected. One algorithm is that the transaction is merely forced to wait until the requested item becomes available. This approach, however, can lead to deadlock, since two transactions that require exclusive access to the same two data items could block each other's progress if each obtains exclusive access to one of the items and then insists on waiting for the other. To avoid such dead- locks, some database management systems give priority to older transactions. That is, if an older transaction requires access to an item that is locked by a younger transaction, the younger transaction is forced to release all of its data items, and its activities are rolled back (based on the log). Then, the older transaction is given access to the item it required, and the younger transaction is forced to start again. If a younger transaction is repeatedly preempted, it will grow older in the process and ultimately become one of the older transactions with high priority. This protocol,

Copyright Virtual University of Pakistan

known as the **wound-wait protocol** (old transactions wound young transactions, young transactions wait for old ones), ensures that every transaction will ultimately be allowed to complete its task.

Copyright Virtual University of Pakistan

Module 163

163. Database Systems: Sequential Files

A **sequential file** is a file that is accessed in a serial manner from its beginning to its end as though the information in the file were arranged in one long row. Examples include audio files, video files, files containing programs, and files containing textual documents. In fact, most of the files created by a typical personal computer user are sequential files. For instance, when a spreadsheet is saved, its information is encoded and stored as a sequential file from which the spreadsheet application software can reconstruct the spreadsheet.

Text files, which are sequential files in which each logical record is a single symbol encoded using ASCII or Unicode, often serve as a basic tool for constructing more elaborate sequential files such as an employee records file. One only needs to establish a uniform format for representing the information about each employee as a string of text, encode the information according to that format, and then record the resulting employee records one after another as one single string of text. For example, one could construct a simple employee file by agreeing to enter each employee record as a string of 31 characters, consisting of a field of 25 characters contain- ing the employee's name (filled with enough blanks to complete the 25-character field), followed by a field of 6 characters representing the employee's identification number. The final file would be a long string of encoded characters in which each 31-character block represents the information about a single employee (Figure 119). Information would be retrieved from the file in terms of logical records consisting of 31-character blocks. Within each of these blocks, individual fields would be identi- fied according to the uniform format with which the blocks were constructed.

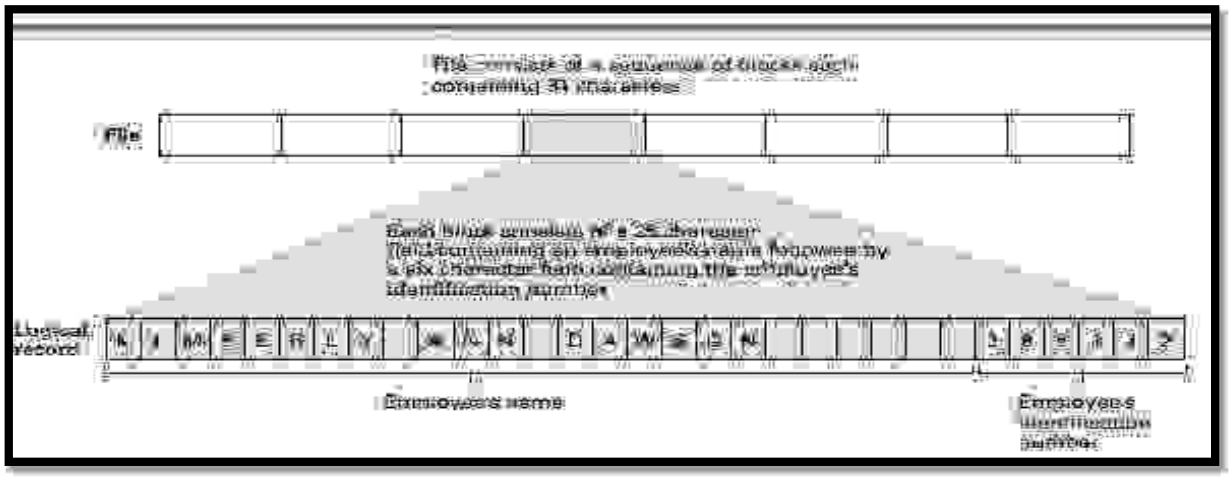


Figure 119: The structure of a simple employee file implemented as a text file

The data in a sequential file must be recorded in mass storage in such a way that the sequential nature of the file is preserved. If the mass storage system is itself sequential (as in the case of a magnetic tape or CD), this is a straightforward undertaking. We need merely record the file on the storage medium according to the sequential properties of the medium. Then processing the file is the task of merely reading and processing the file's contents in the order in which they are found. This is exactly the process followed in playing audio CDs, where the music is stored as a sequential file sector by sector along one continuous spiraling track.

In the case of magnetic disk storage, however, the file would be scattered over different sectors that could be retrieved in a variety of orders. To preserve the proper order, most operating systems (more precisely, the file manager) maintain a list of the sectors on which the file is stored. This list is recorded as part of the

Copyright Virtual University of Pakistan

disk's directory system on the same disk as the file. By means of this list, the operating system can retrieve the sectors in the proper sequence as though the file were stored sequentially, even though the file is actually distributed over various portions of the disk.

Inherent in processing a sequential file is the need to detect when the end of the file is reached. Generically, we refer to the end of a sequential file as the **end-of-file (EOF).** There are a variety of ways of identifying the EOF. One is to place a special record, called a **sentinel,** at the end of the file. Another is to use the information in the operating system's directory system to identify a file's EOF. That is, since the operating system knows which sectors contain the file, it also knows where the file terminates. A classic example involving sequential files is payroll processing in a small company. Here we imagine a sequential file consist- ing of a series of logical records, each of which contains the information about an employee's pay (name, employee identification number, pay scale, and so on) from which checks must be printed on a routine basis. As each employee record is retrieved, that employee's pay is calculated, and the appropriate check produced.

Copyright Virtual University of Pakistan

Module 164

164. Database Systems: Indexed Files

Sequential files are ideal for storing data that will be processed in the order in which the file's entries are stored. However, such files are inefficient when records within the file must be retrieved in an unpredictable order. In such situations what is needed is a way to identify the location of the desired logical record quickly. A popular solution is to use an index for the file in much the same way that an index in a book is used to locate topics within the book. Such a file system is called an indexed file.

An index for a file contains a list of the keys stored in the file along with entries indicating where the record containing each key is stored. Thus to find a particular record, one finds the identifying key in the index and then retrieves the block of information stored at the location associated with that key.

A file's index is normally stored as a separate file on the same mass storage device as the indexed file. The index is usually transferred to main memory before file processing begins so that it is easily accessible when access to records in the file is required (Figure 120).

A classic example of an indexed file occurs in the context of maintaining employee records. Here an index can be used to avoid lengthy searches when you are retrieving an individual record. In particular, if the file of employee records is indexed by employee identification numbers, then an employee's record can be retrieved quickly when the employee's identification number is known. Another example is found on audio CDs where an index is used to allow relatively quick access to individual recordings.

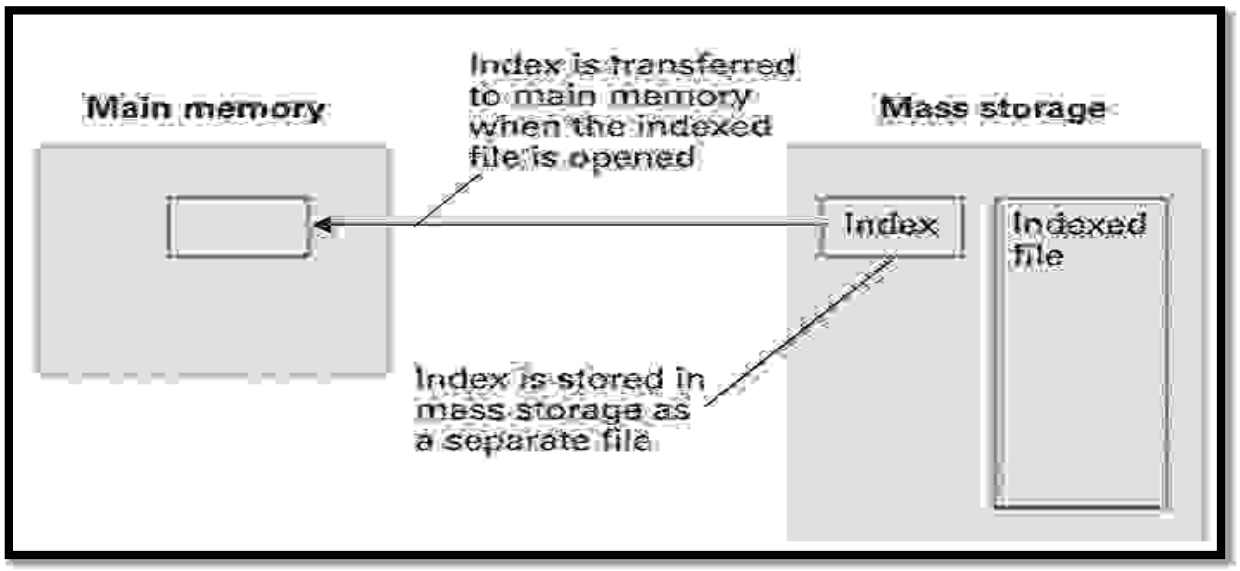


Figure 120: Opening an indexed file

Over the years numerous variations of the basic index concept have been used. One variation constructs an index in a hierarchical manner so that the index takes on a layered or tree structure. A prominent example is the hierarchical directory system used by most operating systems for organizing file storage. In such a case, the directories, or folders, play the role of indexes, each containing links to its sub-indexes. From this perspective, the entire file system is merely one large indexed file.

Copyright Virtual University of Pakistan

Module 165

165. Database Systems: Hash Files

Although indexing provides relatively quick access to entries within a data storage structure, it does so at the expense of index maintenance. **Hashing** is a technique that provides similar access without such overhead. As in the case of an indexed system, hashing allows a record to be located by means of a key value. But, rather than looking up the key in an index, hashing identifies the location of the record directly from the key.

A hash system can be summarized as follows: The data storage space is divided into several sections, called **buckets,** each of which is capable of holding several records. The records are dispersed among the buckets according to an algorithm that converts key values into bucket numbers. (This conversion from key values to bucket numbers is called a **hash function.**) Each record is stored in the bucket identified by this process. Therefore, a record that has been placed in the storage structure can be retrieved by first applying the hash function to the record's identifying key to determine the appropriate bucket, then retrieving the contents of that bucket, and finally searching through the data retrieved for the desired record.

Hashing is not only used as a means of retrieving data from mass storage but also as a means of retrieving items from large blocks of data stored in main memory. When hashing is applied to a storage structure in mass storage, the result is called a **hash file.** When applied to a storage structure within main memory, the result is usually called a **hash table.**

Copyright Virtual University of Pakistan

Module 166

166. Database Systems: Hash File Example

Let us apply the hashing technique to the classic employee file in which each record contains information about a single employee in a company. First, we establish several available areas of mass storage that will play the role of buckets. The number of buckets and the size of each bucket are design decisions that we will consider later. For now, let us assume that we have created 41 buckets, which we refer to as bucket number 0, bucket number 1, through bucket number 40. (The reason we selected 41 buckets rather than an even 40 will be explained shortly.)

Let us assume that an employee's identification number will be used as the key for identifying the employee's record. Our next task, then, is to develop a hash function for converting these keys into bucket numbers. Although the employee identification "numbers" might have the form 25X3Z or J2X35 and are therefore not numeric, they are stored as bit patterns, and we can interpret the bit patterns as numbers. Using this numeric interpretation, we can divide any key by the number of buckets available and record the remainder, which in our case will be an integer in the range from 0 to 40. Thus we can use the remainder of this division process to identify one of the 41 buckets (Figure 121).

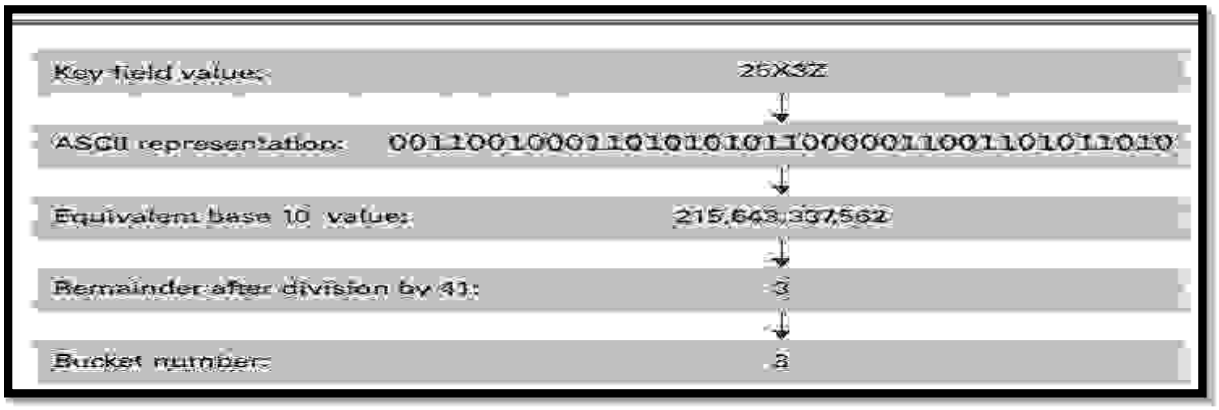


Figure 121: Hashing the key field value 25X3Z to one of 41 buckets

Using this as our hash function, we proceed to construct the file by considering each record individually, applying our divide-by-41 hash function to its key to obtain a bucket number, and then storing the record in that bucket (Figure 122). Later, if we need to retrieve a record, we need merely apply our hash function to the record's key to identify the appropriate bucket and then search that bucket for the record in question.

At this point let us reconsider our decision to divide the storage area into 41 buckets. First, note that to obtain an efficient hash system, the records being stored should be distributed evenly among the buckets. If a disproportionate num- ber of keys happen to hash to the same bucket (a phenomenon called **clustering**), then a disproportionate number of records will be stored in a single bucket. In turn, retrieving a record from that bucket could require a time-consuming search, causing the loss of any benefits gained by hashing.

Now observe that if we had chosen to divide the storage area into 40 buckets rather than 41, our hash function would have involved dividing the keys by the value 40 rather than 41. But, if a dividend and a divisor both have a common factor, that factor will be present in the remainder as well. In particular, if the keys to the entries stored in our hash file happened to be multiples of 5 (which is also a divisor of 40), then the factor of 5 would appear in the remainders when divided by 40, and the entries would cluster in those buckets associated with the remainders 0, 5, 10, 15, 20, 25, 30, and 35. Similar situations would occur in the case of keys that are multiples of 2, 4, 8, 10, and 20, because they are all also fac- tors of 40.

Copyright Virtual University of Pakistan

Consequently, we choose to divide the storage area into 41 buckets because the choice of 41, being a prime number, eliminated the possibility of common factors and therefore reduced the chance of clustering.

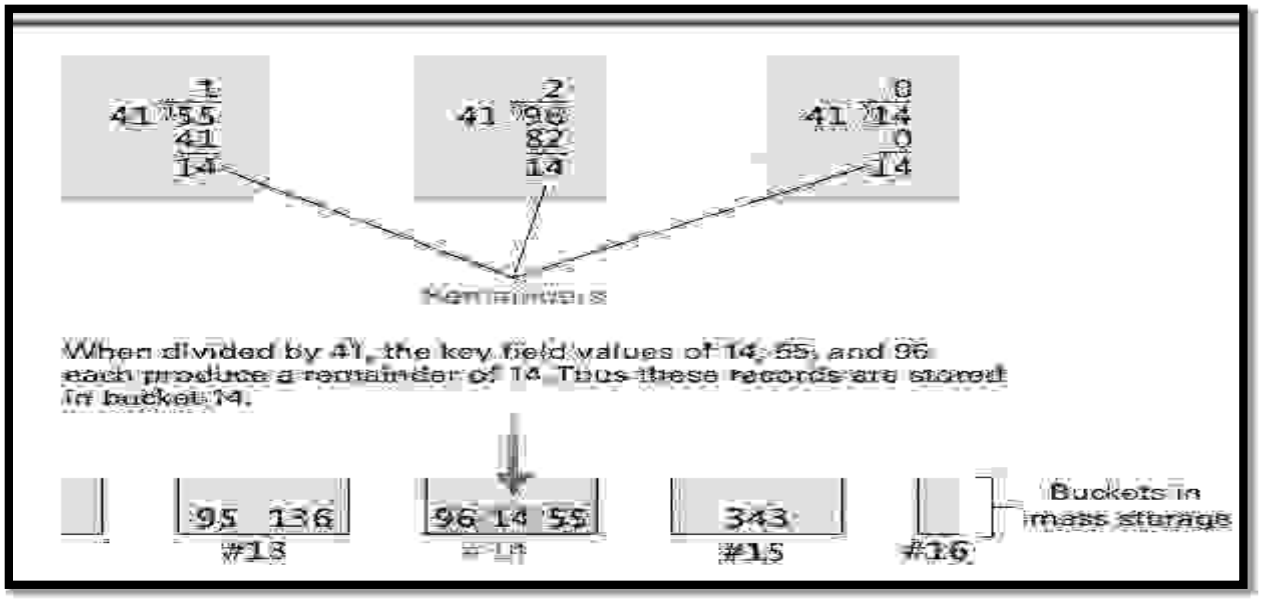


Figure 122: The rudiments of a hashing system

Copyright Virtual University of Pakistan

Module 167

167. Database Systems: Data Mining

A rapidly expanding subject that is closely associated with database technology is data mining, which consists of techniques for discovering patterns in collections of data. Data mining has become an important tool in numerous areas including marketing, inventory management, quality control, loan risk management, fraud detection, and investment analysis. Data mining techniques even have applications in what might seem unlikely settings as exemplified by their use in identifying the functions of particular genes encoded in DNA molecules and characterizing properties of organisms.

Data mining activities differ from traditional database interrogation in that data mining seeks to identify previously unknown patterns as opposed to traditional database inquiries that merely ask for the retrieval of stored facts. More- over, data mining is practiced on static data collections, called **data warehouses,** rather than "online" operational databases that are subject to frequent updates. These warehouses are often "snapshots" of databases or collections of databases. They are used in lieu of the actual operational databases because finding patterns in a static system is easier than in a dynamic one.

We should also note that the subject of data mining is not restricted to the domain of computing but has tentacles that extend far into statistics. In fact, many would argue that since data mining had its origins in attempts to perform statistical analysis on large, diverse data collections, it is an application of statistics rather than a field of computer science.

Two common forms of data mining are **class description** and **class discrimination.** Class description deals with identifying properties that characterize a given group of data items, whereas class discrimination deals with identifying properties that divide two groups. For example, class description techniques would be used to identify characteristics of people who buy small economical vehicles, whereas class discrimination techniques would be used to find proper- ties that distinguish customers who shop for used cars from those who shop for new ones.

Copyright Virtual University of Pakistan

Module 168

168. Database Systems: Data Mining Examples and Implications

Another form of data mining is **cluster analysis,** which seeks to discover classes. Note that this differs from class description, which seeks to discover properties of members within classes that are already identified. More precisely, cluster analysis tries to find properties of data items that lead to the discovery of groupings. For example, in analyzing information about people's ages who have viewed a particular motion picture, cluster analysis might find that the customer base breaks down into two age groups—a 4-to-0 age group and a 25-to-40 age group. (Perhaps the motion picture attracted children and their parents?)

Still another form of data mining is **association analysis,** which involves looking for links between data groups. It is association analysis that might reveal that customers who buy potato chips also buy beer and soda or that people who shop during the traditional weekday work hours also draw retirement benefits.

Outlier analysis is another form of data mining. It tries to identify data entries that do not comply with the norm. Outlier analysis can be used to identify errors in data collections, to identify credit card theft by detecting sudden deviations from a customer's normal purchase patterns, and perhaps to identify potential terrorists by recognizing unusual behavior.

Finally, the form of data mining called **sequential pattern analysis** tries to identify patterns of behavior over time. For example, sequential pattern analysis might reveal trends in economic systems such as equity markets or in environ- mental systems such as climate conditions.

As indicated by our last example, results from data mining can be used to predict future behavior. If an entity possesses the properties that characterize a class, then the entity will probably behave like members of that class. However, many data mining projects are aimed at merely gaining a better understanding of the data, as witnessed by the use of data mining in unraveling the mysteries of DNA. In any case, the scope of data mining applications is potentially enormous, and thus data mining promises to be an active area of research for years to come. Note that database technology and data mining are close cousins, and thus research in one will have repercussions in the other. Database techniques are used extensively to give data warehouses the capability of presenting data in the form of **data cubes** (data viewed from multiple perspectives—the term *cube* is used to conjecture the image of multiple dimensions) that make data mining possible. In turn, as researchers in data mining improve techniques for implementing data cubes, these results will pay dividends in the field of database design.

In closing, we should recognize that successful data mining encompasses much more than the identification of patterns within a collection of data. Intelligent judgment must be applied to determine whether those patterns are significant or merely coincidences. The fact that a particular convenience store has sold a high number of winning lottery tickets should probably not be considered significant to someone planning to buy a lottery ticket, but the discovery that customers who buy snack food also tend to buy frozen dinners might constitute meaningful information to a grocery store manager. Likewise, data mining encompasses a vast number of ethical issues involving the rights of individuals represented in the data warehouse, the accuracy and use of the conclusions drawn, and even the appropriateness of data mining in the first place.

Copyright Virtual University of Pakistan

Module 169

169. Database Systems: Social Impact of Database Technology

With the development of database technology, information that was once buried in arcane records has become accessible. In many cases, automated library systems place a patron's reading habits within easy reach, retailers maintain records of their customers' purchases, and Internet search engines keep records of their clients' requests. In turn this information is potentially available to marketing firms, law enforcement agencies, political parties, employers, and private individuals.

This is representative of the potential problems that permeate the entire spectrum of database applications. Technology has made it easy to collect enormous amounts of data and to merge or compare different data collections to obtain relationships that would otherwise remain buried in the heap. The ramifications, both positive and negative, are enormous. These ramifications are not merely subjects for academic debate—they are realities.

In some cases, the data collection process is readily apparent; in others it is subtle. Examples of the first case occur when one is explicitly asked to provide information. This may be done in a voluntary manner, as in surveys or contest registration forms, or it may be done in an involuntary manner, such as when imposed by government regulations. Sometimes whether it is voluntary depends on one's point of view. Is providing personal information when applying for a loan voluntary or involuntary? The distinction depends on whether receiving the loan is a convenience or a necessity. To use a credit card at some retailers now requires that you allow your signature to be recorded in a digitized format. Again, providing the information is either voluntary or involuntary depending on your situation.

More subtle cases of data collection avoid direct communication with the subject. Examples include a credit company that records the purchasing practices of the holders of its credit cards, websites that record the identities of those who visit the site, and social activists who record the license plate numbers on the cars parked in a targeted institution's parking lot. In these cases, the subject of the data collection might not be aware that information is being collected and less likely to be aware of the existence of the databases being constructed.

Sometimes the underlying data-collection activities are self-evident if one merely stops to think. For example, a grocery store might offer discounts to its regular customers who register in advance with the store. The registration process might involve the issuance of identification cards that must be presented at the time of purchase to obtain the discount. The result is that the store is able to compile a record of the customers' purchases—a record whose value far exceeds the value of the discounts awarded.

Of course, the force driving this boom in data collection is the value of the data, which is amplified by advances in database technology that allow data to be linked in ways that reveal information that would otherwise remain obscure. For example, the purchasing patterns of credit card holders can be classified and cross-listed to obtain customer profiles of immense marketing value. Subscription forms for body-building magazines can be mailed to those who have recently purchased exercise equipment, whereas subscription forms for dog obedience magazines can be targeted toward those who have recently purchased dog food. Alternative ways of combining information are sometimes very imaginative. Welfare records have been compared to criminal records to find and apprehend parole violators, and in 1984 the Selective Service in the United States used old birthday registration lists from a popular ice cream retailer to identify citizens who had failed to register for the military draft.

There are several approaches to protecting society from abusive use of data- bases. One is to apply legal remedies. Unfortunately, passing a law against an action does not stop the action from occurring but merely makes the action illegal. A prime example in the United States is the Privacy Act of 1974 whose purpose was to protect citizens from abusive use of government databases. One provision of this act required

Copyright Virtual University of Pakistan

government agencies to publish notice of their databases in the Federal Register to allow citizens to access and correct their personal information. However, government agencies were slow to comply with this provision. This does not necessarily imply malicious intent. In many cases the problem was one of bureaucracy. But the fact that a bureaucracy might be constructing personnel databases that it is unable to identify is not reassuring.

Another, and perhaps more powerful, approach to controlling database abuse is public opinion. Databases will not be abused if the penalties outweigh the benefits; and the penalty businesses fear the most is adverse public opinion—this goes right to the bottom line. In the early 1990s it was public opinion that ultimately stopped major credit bureaus from selling mailing lists for marketing purposes. More recently, Google discontinued its Google Buzz social networking tool in 2011 after its automatic sharing of contact information from the popular Gmail tool was greeted with harsh public criticism. Even government agencies have bowed to public opinion. In 1997 the Social Security Administration in the United States modified its plan to make Social Security records available via the Internet when public opinion questioned the security of the information. In some of these cases results were obtained in days—a stark contrast to the extended time periods associated with legal processes.

Of course, in many cases database applications are beneficial to both the holder and the subject of the data, but in all cases, there is a loss of privacy that should not be taken lightly. Such privacy issues are serious when the information is accurate, but they become gigantic when the information is erroneous. Imagine the feeling of hopelessness if you realized that your credit rating was adversely affected by erroneous information. Imagine how your problems would be amplified in an environment in which this misinformation was readily shared with other institutions. Privacy problems are, and will be, a major side effect of advancing technology in general and database techniques in particular. The solutions to these problems will require an educated, alert, and active citizenry.

Copyright Virtual University of Pakistan

Module 170

170. Artificial Intelligence: Introduction and Vision

Artificial intelligence is the field of computer science that seeks to build autonomous machines - machines that can carry out complex tasks without human intervention. AI is helping to make Robots as shown in the Figure 123, and self-driving cars as shown in the Figure 124.



Figure 123: Robot



Figure 124: Self Driving Cars

Robots can help patients, for example one typical robot shown in the Figure 125 can alleviate a person even 40 times a day.

Copyright Virtual University of Pakistan

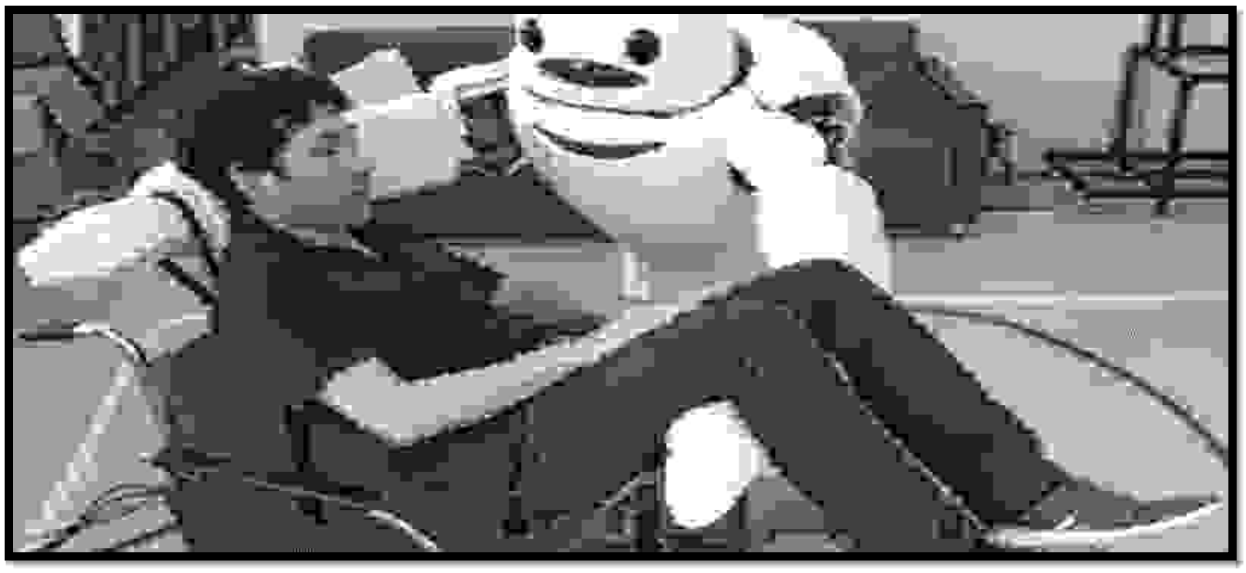


Figure 125: Medical robot helping the patients

Pepper Robot works as receptionist in Belgian hospital shown in the Figure 126.

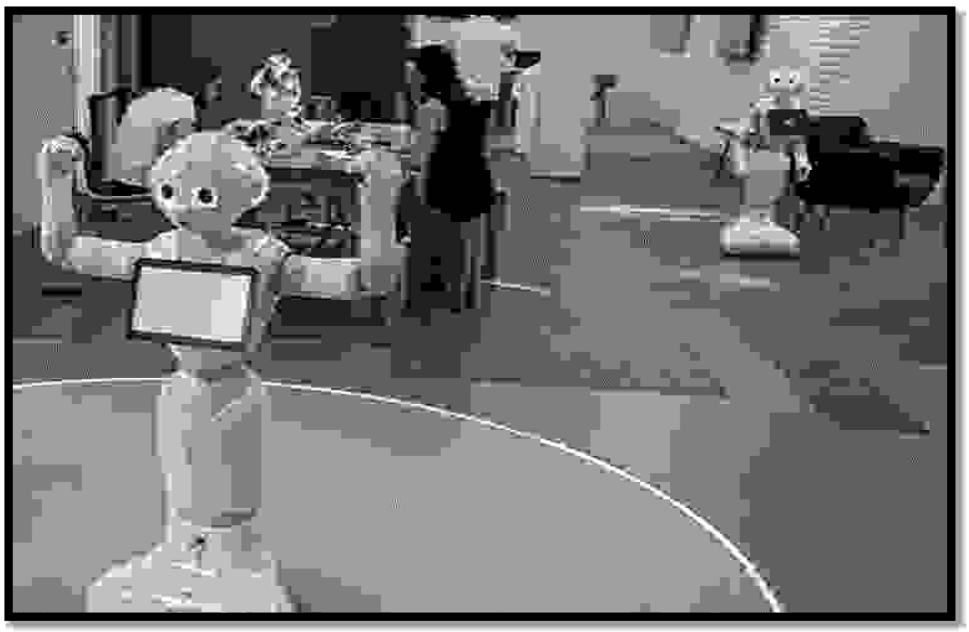


Figure 126: Receptionist Robot

Another robot is shown in the Figure 127. This robot is able to take blood from the veins of the humans and it is more accurate than humans. It performs image processing to locate the veins and further confirmed by the ultrasound.

Copyright Virtual University of Pakistan

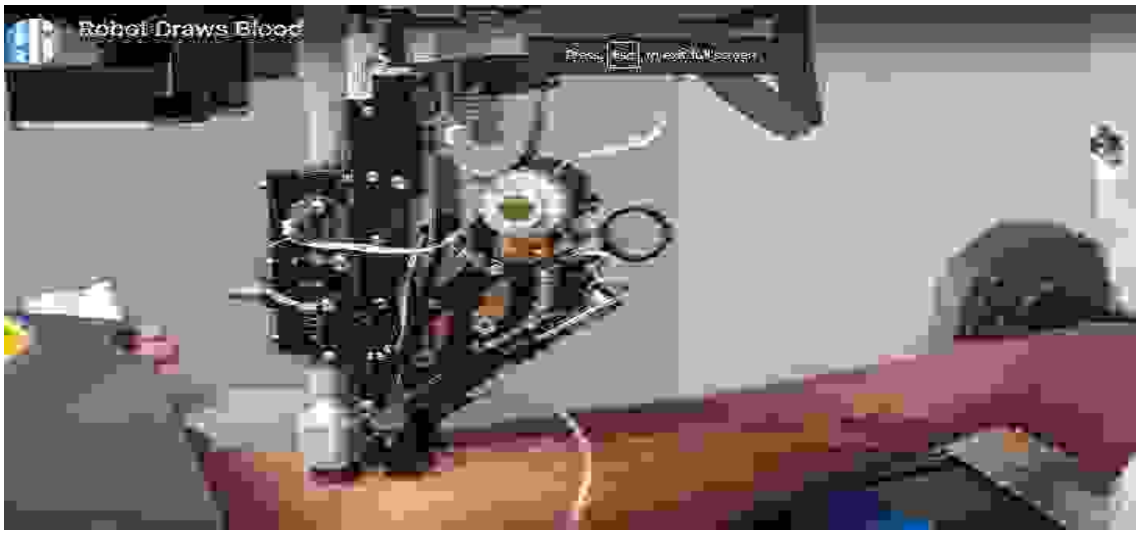


Figure 127: Robot draws blood

Copyright Virtual University of Pakistan

Module 171

171. Artificial Intelligence: Intelligent Agents

An **agent** is a "device" that responds to stimuli from its environment. It is natural to envision an agent as an individual machine such as a robot, although an agent may take other forms such as an autonomous airplane, a character in an interactive video game, or a process communicating with other processes over the Internet (perhaps as a client, a server, or a peer). Most agents have sensors by which they receive data from their environments and actuators by which they can affect their environments. Examples of sensors include microphones, cameras, range sensors, and air or soil sampling devices. Examples of actuators include wheels, legs, wings, grippers, and speech synthesizers.

Much of the research in artificial intelligence can be characterized in the context of building agents that behave intelligently, meaning that the actions of the agent's actuators must be rational responses to the data received though its sensors. In turn, we can classify this research by considering different levels of these responses.

The simplest response is a reflex action, which is merely a predetermined response to the input data. Higher levels of response are required to obtain more "intelligent" behavior. For example, we might empower an agent with knowledge of its environment and require that the agent adjust its actions accordingly. The process of throwing a baseball is largely a reflex action but determining how and where to throw the ball requires knowledge of the current environment. (There is one out with runners on first and third.) How such real-world knowledge can be stored, updated, accessed, and ultimately applied in the decision-making process continues to be a challenging problem in artificial intelligence.

Another level of response is required if we want the agent to seek a goal such as winning a game of chess or maneuvering through a crowded passageway. Such goal-directed behavior requires that the agent's response, or sequence of responses, be the result of deliberately forming a plan of action or selecting the best action among the current options.

In some cases, an agent's responses improve over time as the agent learns. This could take the form of developing **procedural knowledge** (learning "how") or storing **declarative knowledge** (learning "what"). Learning procedural knowledge usually involves a trial-and-error process by which an agent learns appropriate actions by being punished for poor actions and rewarded for good ones. Following this approach, agents have been developed that, over time, improve their abilities in competitive games such as checkers and chess. Learning declarative knowledge usually takes the form of expanding or altering the "facts" in an agent's store of knowledge. For example, a baseball player must repeatedly adjust his or her database of knowledge (there is still just one out, but now runners are on first and second) from which rational responses to future events are determined.

To produce rational responses to stimuli, an agent must "understand" the stimuli received by its sensors. That is, an agent must be able to extract information from the data produced by its sensors, or in other words, an agent must be able to perceive. In some cases, this is a straightforward process. Signals obtained from a gyroscope are easily encoded in forms compatible with calculations for determining responses. But in other cases, extracting information from input data is difficult. Examples include understanding speech and images. Likewise, agents must be able to formulate their responses in terms compatible with their actuators. This might be a straightforward process, or it might require an agent to formulate responses as complete spoken sentences—meaning that the agent must generate speech. In turn, such topics as image processing and analysis, natural language understanding, and speech generation are important areas of research. The agent attributes that we have identified here represent past as well as cur- rent areas of research. Of course, they are not totally independent of each other. We would like to develop agents that possess all of them, producing agents that understand the data received from their environments and develop new response patterns through a learning process whose goal is to maximize the agent's abili- ties.

Copyright Virtual University of Pakistan

However, by isolating various types of rational behavior and pursuing them independently, researchers gain a toehold that can later be combined with progress in other areas to produce more intelligent agents.

We close this subsection by introducing an agent that will provide a context for our discussion in Sections 11.2 and 11.3. The agent is designed to solve the eight-puzzle, which consists of eight square tiles labeled 1 through 8 mounted in a frame capable of holding a total of nine such tiles in three rows and three columns (Figure 128). Among the tiles in the frame is a vacancy into which any of the adjacent tiles can be pushed, allowing the tiles in the frame to be scrambled. The problem posed is to move the tiles in a scrambled puzzle back to their initial positions (Figure 128).

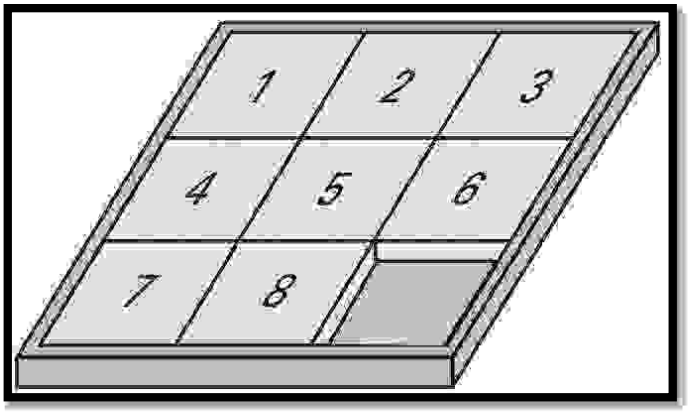


Figure 128: The eight-puzzle in its solved configuration

Our agent takes the form of a box equipped with a gripper, a video camera, and a finger with a rubber end so that it does not slip when pushing something (Figure 129). When the agent is first turned on, its gripper begins to open and close as if asking for the puzzle. When we place a scrambled eight-puzzle in the gripper, the gripper closes on the puzzle. After a short time, the machine's finger lowers and begins pushing the tiles around in the frame until they are back in their original positions. At this point the machine releases the puzzle and turns itself off.

This puzzle-solving machine exhibits two of the agent attributes that we have identified. First, it must be able to perceive in the sense that it must extract the current puzzle state from the image it receives from its camera.

Copyright Virtual University of Pakistan

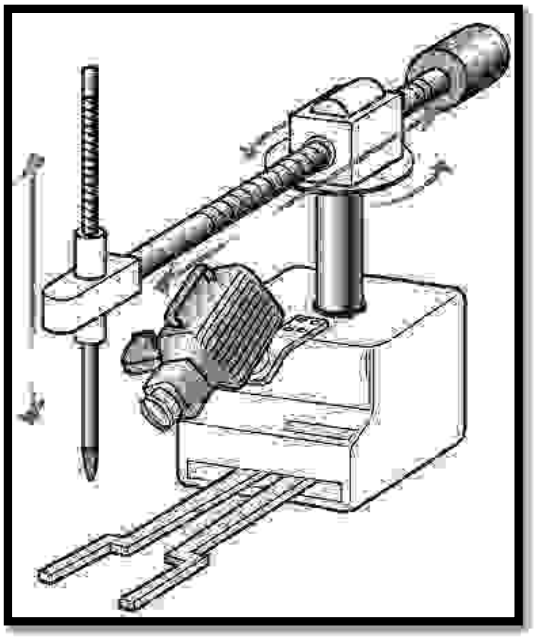


Figure 129: Our puzzle-solving machine

Copyright Virtual University of Pakistan

Module 172

172. Artificial Intelligence: Research Methodologies

To appreciate the field of artificial intelligence, it is helpful to understand that it is being pursued along two paths. One is the engineering track in which researchers are trying to develop systems that exhibit intelligent behavior. The other is a theoretical track in which researchers are trying to develop a computational understanding of animal—especially human—intelligence. This dichotomy is clarified by considering the manner in which the two tracks are pursued. The engineering approach leads to a performance-oriented methodology because the underlying goal is to produce a product that meets certain performance goals. The theoretical approach leads to a simulation-oriented methodology because the underlying goal is to expand our understanding of intelligence and thus the emphasis is on the underlying process rather than the exterior performance.

As an example, consider the fields of natural language processing and linguistics. These fields are closely related and benefit from research in each other, yet the underlying goals are different. Linguists are interested in learning how humans process language and thus tend toward more theoretical pursuits. Researchers in the field of natural language processing are interested in developing machines that can manipulate natural language and therefore lean in the engineering direction. Thus, linguists operate in simulation-oriented mode- building systems whose goals are to test theories. In contrast, researchers in natural language processing operate in performance-oriented mode-building systems to perform tasks. Systems produced in this latter mode (such as document translators and systems by which machines respond to verbal commands) rely heavily on knowledge gained by linguists but often apply "shortcuts" that happen to work in the restricted environment of the particular system.

As an elementary example, consider the task of developing a shell for an operating system that receives instructions from the outside world through verbal English commands. In this case, the shell (an agent) does not need to worry about the entire English language. More precisely, the shell does not need to distinguish between the various meanings of the word *copy.* (Is it a noun or a verb? Should it carry the connotation of plagiarism?) Instead, the shell needs merely to distinguish the word *copy* from other commands such as *rename* and *delete.* Thus, the shell could perform its task just by matching its inputs to predetermined audio patterns. The performance of such a system may be satisfactory to an engineer, but the way it is obtained would not be aesthetically pleasing to a theoretician.

Copyright Virtual University of Pakistan

Module 173

173. Artificial Intelligence: The Turing Test

In the past the **Turing test** (proposed by Alan Turing in 1950) has served as a benchmark in measuring progress in the field of artificial intelligence. Today the significance of the Turing test has faded although it remains an important part of the artificial intelligence folklore. Turing's proposal was to allow a human, whom we call the interrogator, to communicate with a test subject by means of a typewriter system without being told whether the test subject was a human or a machine. In this environment, a machine would be declared to behave intelligently if the interrogator was not able to distinguish it from a human. Turing predicted that by the year 2000 machines would have a 30 percent chance of passing a five-minute Turing test—a conjecture that turned out to be surprisingly accurate.

One reason that the Turing test is no longer considered to be a meaningful measure of intelligence is that an eerie appearance of intelligence can be produced with relative ease. A well-known example arose as a result of the pro- gram DOCTOR (a version of the more general system called ELIZA) developed by Joseph Weizenbaum in the mid-1960s. This interactive program was designed to project the image of a Rogerian analyst conducting a psychological interview; the computer played the role of the analyst while the user played the patient. Internally, all that DOCTOR did was restructure the statements made by the patient according to some well-defined rules and direct them back to the patient. For example, in response to the statement "I am tired today," DOCTOR might have replied with "Why do you think, you are tired today?" If DOCTOR was unable to recognize the sentence structure, it merely responded with something like "Go on" or "That's very interesting."

Weizenbaum's purpose in developing DOCTOR dealt with the study of nat- ural language communication. The subject of psychotherapy merely provided an environment in which the program could "communicate." To Weizenbaum's dismay, however, several psychologists proposed using the program for actual psychotherapy. (The Rogerian thesis is that the patient, not the analyst, should lead the discussion during the therapeutic session, and thus, they argued, a computer could possibly conduct a discussion as well as a therapist could.) Moreover, DOCTOR projected the image of comprehension so strongly that many who "communicated" with it became subservient to the machine's question-and- answer dialogue. In a sense, DOCTOR passed the Turing test. The result was that ethical, as well as technical, issues were raised, and Weizenbaum became an advocate for maintaining human dignity in a world of advancing technology.

More recent examples of Turing test "successes" include Internet viruses that carry on "intelligent" dialogs with a human victim in order to trick the human into dropping his or her malware guard. Moreover, phenomena similar to Turing tests occur in the context of computer games such as chess-playing programs. Although these programs select moves merely by applying brute-force techniques, humans competing against the computer often experience the sensation that the machine possesses creativity and even a personality. Similar sensations occur in robotics where machines have been built with physical attributes that project intelligent characteristics. Examples include toy robot dogs that project adorable personalities merely by tilting their heads or lifting their ears in response to a sound.

Copyright Virtual University of Pakistan

Module 174

174. Artificial Intelligence: Understanding Images

Let us consider the problems posed by the puzzle-solving machine introduced in the module number 171. The opening and closing of the gripper on the machine present no serious obstacle, and the ability to detect the presence of the puzzle in the gripper during this process is straightforward because our application requires very little precision. Even the problem of focusing the camera on the puzzle can be handled simply by designing the gripper to position the puzzle at a particular predetermined position for viewing. Consequently, the first intelligent behavior required by the machine is the extraction of information through a visual medium.

It is important to realize that the problem faced by our machine when looking at the puzzle is not that of merely producing and storing an image. Technology has been able to do this for years as in the case of traditional photography and television systems. Instead, the problem is to understand the image in order to extract the cur- rent status of the puzzle (and perhaps later to monitor the movement of the tiles). In the case of our puzzle-solving machine, the possible interpretations of the puzzle image are relatively limited. We can assume that what appears is always an image containing the digits 1 through 8 in a well-organized pattern. The problem is merely to extract the arrangement of these digits. For this, we imagine that the picture of the puzzle has been encoded in terms of bits in the computer's memory, with each bit representing the brightness level of a particular pixel. Assuming a uniform size of the image (the machine holds the puzzle at a predetermined location in front of the camera), our machine can detect which tile is in which position by comparing the different sections of the picture to prerecorded templates consisting of the bit patterns produced by the individual digits used in the puzzle. As matches are found, the condition of the puzzle is revealed.

This technique of recognizing images is one method used in optical character readers. It has the drawback, however, of requiring a certain degree of uniformity for the style, size, and orientation of the symbols being read. In particular, the bit pattern produced by a physically large character does not match the template for a smaller version of the same symbol, even though the shapes are the same. Moreover, you can imagine how the problems increase in difficulty when trying to process handwritten material.

Another approach to the problem of character recognition is based on matching the geometric characteristics rather than the exact appearance of the symbols. In such cases the digit 1 might be characterized as a single vertical line, 2 might be an opened curved line joined with a horizontal straight line across the bottom, and so on. This method of recognizing symbols involves two steps: The first is to extract the features from the image being processed, and the second is to compare the features to those of known symbols. As with the template-matching approach, this technique for recognizing characters is not foolproof. For instance, minor errors in the image can produce a set of entirely different geometric features, as in the case of distinguishing between an O and a C or, in the case of the eight-puzzle, a 3 and an 8. We are fortunate in our puzzle application because we do not need to under- stand images of general three-dimensional scenes. Consider, for example, the advantage we have by being assured that the shapes to be recognized (the digits 1 through 8) are isolated in different parts of the picture rather than appearing as overlapping images, as is common in more general settings. In a general photograph, for instance, one is faced not only with the problem of recognizing an object from different angles but also with the fact that some portions of the object might be hidden from view.

The task of understanding general images is usually approached as a two-step process: (1) **image processing,** which refers to identifying characteristics of the image, and (2) **image analysis,** which refers to the process of understanding what these characteristics mean. We have already observed this dichotomy in the context of recognizing symbols by means of their geometric features. In that situation, we found image processing represented by the process of identifying the geometric features found in the image and image analysis represented by the process of identifying the meaning of those features.

Copyright Virtual University of Pakistan

Image processing entails numerous topics. One is edge enhancement, which is the process of applying mathematical techniques to clarify the boundaries between regions in an image. In a sense, edge enhancement is an attempt to convert a photograph into a line drawing. Another activity in image analysis is known as region finding. This is the process of identifying those areas in an image that have common properties such as brightness, color, or texture. Such a region probably represents a section of the image that belongs to a single object. (It is the ability to recognize regions that allows computers to add color to old-fashioned black-and- white motion pictures.) Still another activity within the scope of image processing is smoothing, which is the process of removing flaws in the image. Smoothing keeps errors in the image from confusing the other image-processing steps, but too much smoothing can cause the loss of important information as well.

Smoothing, edge enhancement, and region finding are all steps toward identifying the various components in an image. Image analysis is the process of determining what these components represent and ultimately what the image means. Here one faces such problems as recognizing partially obstructed objects from different perspectives. One approach to image analysis is to start with an assumption about what the image might be and then try to associate the components in the image with the objects whose presence is conjectured. This appears to be an approach applied by humans. For instance, we sometimes find it hard to recognize an unexpected object in a setting in which our vision is blurred, but once we have a clue to what the object might be, we can easily identify it.

The problems associated with general image analysis are enormous, and much research in the area remains to be done. Indeed, image analysis is one of the fields that demonstrates how tasks that are performed quickly and apparently easily by the human mind continue to challenge the capabilities of machines.

Module 175

175. Artificial Intelligence: Language Processing

Another perception problem that has proven challenging is that of understanding language. The success obtained in translating formal high-level programming languages into machine language led early researchers to believe that the ability to program computers to understand natural language was only a few years away. Indeed, the ability to translate programs gives the illusion that the machine actually understands the language being translated.

What these researchers failed to understand was the depth to which formal programming languages differ from natural languages such as English, German, and Latin. Programming languages are constructed from well-designed primitives so that each statement has only one grammatical structure and only one meaning. In contrast, a statement in a natural language can have multiple meanings depending on its context or even the manner in which it is communicated. Thus, to understand natural language, humans rely heavily on additional knowledge.

For example, the sentences

Norman Rockwell painted people.

and

Cinderella had a ball.

have multiple meanings that cannot be distinguished by parsing or translating each word independently. Instead, to understand these sentences requires the ability to comprehend the context in which the statement is made. In other instances, the true meaning of a sentence is not the same as its literal translation. For example,

Do you know what time it is?

Copyright Virtual University of Pakistan

Often means "Please tell me what time it is," or if the speaker has been waiting for a long time, it might mean "You are very late."

To unravel the meaning of a statement in a natural language therefore requires several levels of analysis. The first of these is **syntactic analysis,** whose major component is parsing. It is here that the subject of the sentence

Mary gave John a birthday card. is recognized as *Mary*, while the subject of

John got a birthday card from Mary.

is found to be *John.*

Another level of analysis is called **semantic analysis.** In contrast to the parsing process, which merely identifies the grammatical role of each word, semantic analysis is charged with the task of identifying the semantic role of each word in the statement. Semantic analysis seeks to identify such things as the action described, the agent of that action (which might or might not be the subject of the sentence), and the object of the action. It is through semantic analysis that the sentences "Mary gave John a birthday card" and "John got a birthday card from Mary" would be recognized as saying the same thing.

A third level of analysis is **contextual analysis.** It is at this level that the context of the sentence is brought into the understanding process. For example, it is easy to identify the grammatical role of each word in the sentence:

The bat fell to the ground.

We can even perform semantic analysis by identifying the action involved as *falling,* the agent as *bat,* and so on. But it is not until we consider the context of the statement that the meaning of the statement becomes clear. In particular, it has a different meaning in the context of a baseball game than it does in the context of cave exploration. Moreover, it is at the contextual level that the true meaning of the question "Do you know what time it is?" would finally be revealed.

We should note that the various levels of analysis—syntactic, semantic, and contextual—are not necessarily independent. The subject of the sentence

Stampeding cattle can be dangerous.

is the noun *cattle* (modified by the adjective *stampeding*) if we envision the cattle stampeding on their own. But the subject is the gerund *stampeding* (with object *cattle*) in the context of a troublemaker whose entertainment consists of starting stampedes. Thus the sentence has more than one grammatical structure—which one is correct depends on the context.

Another area of research in natural language processing concerns an entire document rather than individual sentences. Here the problems of concern fall into two categories: **information retrieval** and **information extraction.** Information retrieval refers to the task of identifying documents that relate to the topic at hand. An example is the problem faced by users of the World Wide Web as they try to find the sites that relate to a particular topic. The current state of the art is to search sites for key words, but this often produces an avalanche of false leads and can overlook an important site because it deals with "automobiles" instead of "cars." What is needed is a search mechanism that understands the contents of the sites being considered. The difficulty of obtaining such under- standing is the reason many are turning to techniques such as XML to produce a semantic Web as was introduced in the module 75.

Copyright Virtual University of Pakistan

Module 176

176. CS Impact: CS impact on Society

Computer Science has impacted lives of humans largely. In this module we will learn the positive and negative impacts of CS on our society.

Positive impact of CS:

- ✓ It has improved the communication between people.
- ✓ Increased access to educational information via the Internet
- ✓ Increased productivity of people as now their manual work has reduced significantly.
- ✓ Exponential business growth
- ✓ Faster response times (for example, email, instant messaging and chat)

Negative Impact:

- ✓ People are working in sitting position and thus have more chance to develop obesity.
- ✓ Exposure to inappropriate material via the Internet
- ✓ Increased crime and access to private information
- ✓ Hacking bank account and transfer money to your account
- ✓ People are now over-dependent on technology. They even try to catch the people online even if the person is sitting near them geographically. This has decreased the social interactions as well.

Copyright Virtual University of Pakistan

Module 177

177. CS Impact: CS Impact on Health

Computer Science has both positive and negative impacts on health.

Positive impact

- ✓ Easy access to online health centers
- ✓ We can take online appointment
- ✓ We can receive reports via email at home
- ✓ Hospitals can be managed more efficiently
- ✓ Online health tips/issues are available.
- ✓ Health news can be viewed online.

Negative impact

- ✓ Computer wrists – Typing too much. This creates issues in the hands.
- ✓ Eyesight – eye is not meant to look 2D for long amount of time. This increases the risk of eye diseases.
- ✓ Hearing loss is more common in those listening to high volume music on computer.
- ✓ Social Isolation
- ✓ Communication Issues
- ✓ Posture could lead bone issues
- ✓ Radiation Damage when the device is running. Its better to put off all such digital devices especially mobile phones or if it's really necessary to use mobile phone as alarm, then turn on the "airplane mode" in your phones.

Copyright Virtual University of Pakistan

Module 178

178. CS Impact: CS Impact on Environment

Computer Science has both positive and negative impacts on the environment as well.

Positive impact

- ✓ Paperless – Online reading and publishing.
- ✓ Americans use about 680 pounds of paper per person, per year
- ✓ This amounts to about 85 million tons of paper or 2 billion trees.
- ✓ The average American household throws away 13,000 pieces of paper (around 1 billion trees in total in USA) each year. Most in the form of packaging and junk mail.
- ✓ Due to the usage of computer, the above waste of trees is minimizing in the world.

Negative impact

- ✓ In offices, people print unnecessarily.
- ✓ Computers are made from heavy metals (Lead, mercury, Beryllium, Cadmium, PCV) when thrown-away cause water contamination and air pollution.
- ✓ E-waste is sent to developing countries where people extract materials from these electronics such as gold, silver, and copper.
- ✓ They extract them by burning the substances and that process releases hazardous smoke into the air.
- ✓ The people present around the e-waste gain diseases such as skin cancer, brain damage, lung cancer, kidney disease
- ✓ Usage of energy has also increased with the use of computer.

Copyright Virtual University of Pakistan

Module 179

179. CS Impact: Ethical Issues

Ethical issues are related to moral principles or the branch of knowledge dealing with these. Questions of ethics and legality are essential in many industries. Doctors, teachers, government officials and businesspeople all have legal and ethical oversight to control how their professions function. Information technology, by contrast, has no overarching standardization in place. However, as information technology becomes increasingly influential, the ethical and legal considerations become similarly relevant. Here are the five most pressing ethical and legal issues confronting the industry today.

Privacy

Most people have their personal data spread throughout the digital world. Even things thought to be secure, such as email or private accounts, can be accessed by unintended sources. Most employers actively check their employees' computer habits. Privacy has evolving legal implications, but there are also ethical considerations. Do people know how their accounts are monitored? To what extent is such monitoring occurring? Privacy concerns can easily become a slippery slope, slowly eroding an individual's right to privacy completely.

Digital Ownership

Digital mediums have allowed information to flow more freely than before. This exchange of ideas comes with a legal and ethical backlash. How can ownership be established in the digital realm? Things can be easily copied and pasted online, which makes intellectual property hard to control. Legal notions such as copyright have struggled to keep up with the digital era. Companies in the music and entertainment industries have pushed for greater legal protections for intellectual properties while other activists have sought to provide greater freedoms for the exchange of ideas in the digital realm.

Data Gathering

On some level, everyone knows that their online lives are monitored. The United States has even passed legislation allowing the government to actively monitor private citizens in the name of national security. These measures have revived a debate about what information can be gathered and why. This debate applies on a smaller scale as well because companies need to consider what information to collect from their employees. This issue invokes a question of consent. Do people know what information is being monitored? Do they have a right to know how their data is being used?

Copyright Virtual University of Pakistan

Module 180

180. CS Impact: Software Licenses and Information Privacy

Software licenses typically provide end users with the right to one or more copies of the software without violating copyrights. The license also defines the responsibilities of the parties entering into the license agreement and may impose restrictions on how the software can be used. Software licensing terms and conditions usually include fair use of the software, the limitations of liability, warranties and disclaimers and protections if the software or its use infringes on the intellectual property rights of others.

Software licenses typically are either proprietary, free or open source, the distinguishing feature being the terms under which users may redistribute or copy the software for future development or use.

Information Privacy

Data privacy, also called information privacy deals with the ability an organization or individual has to determine what data in a computer system can be shared with third parties.

Children's Online Privacy Protection Act

(COPPA) - gives parents control over what information websites can collect from their kids.

Health Insurance Portability and Accountability Act

(HIPPA) - ensures patient confidentiality for all healthcare-related data.

Electronic Communications Privacy Act

ECPA extends government restrictions on wire taps to include transmissions of electronic data.

Video Privacy Protection Act

Prevents wrongful disclosure of an individual's personally identifiable information stemming from their rental or purchase of audiovisual material.

Gramm-Leach-Bliley Act

Mandates how financial institutions must deal with the private information of individuals.

Copyright Virtual University of Pakistan

Module 181

181. CS Impact: Intellectual Property

Intellectual property (IP) is ideas, information and knowledge. In the University context IP can be viewed as the results and outcomes of research – 'intellectual' because it is creative output and 'property' because it is viewed as a tradable commodity. Intellectual property rights (IPR) are specific legal rights which protect the owners of IP. IPR can be subdivided into the major categories below.

Patent

A patent is a legal monopoly lasting 20 years granted in exchange for describing an invention and paying fees to the Patent Office. A patent position is destroyed by public disclosure of the idea before a patent application is filed (except for a short grace period in the US). Think patent before you publish.

Copyright

Copyright applies to literary and dramatic works, artistic and musical works, audio and video recordings, broadcasts and cable transmissions. Copyright is also the usual way of protecting software, although some software may be patented if it is a functional part of an invention. Copyright arises automatically – it does not need to be applied for – and lasts 70 years after the death of the author.

Database right

Database rights apply to databases which are not protected by copyright (an EU right only – maximum duration is 15 years).

Design right

Design right applies to aspects of the shape or configuration of an article. Unregistered design right (which covers computer chips, for example) can protect internal or external features. In the case of registered designs, the features must appeal to and be judged by the eye. (Registered design rights are protected for a maximum of 25 years.)

Trademark

A trademark is a mark (logo) or other distinctive sign applied to or associated with products or services, which does not describe the products or services. (Once registered the trademark IPR is unlimited.)

Confidential information

Confidential information is knowledge which only you possess and which you have only revealed under a non-disclosure/confidentiality agreement. The comprehensive table has been shown to highlight the details of all the above intellectual properties.

IPR	Covers	Need to apply?	Maximum duration
Patent	Inventions	Yes	20 years
Copyright	Literary, musical, artistic works, and software	No	70 years after death of author

Copyright Virtual University of Pakistan

Registered design	Image – look and feel	Yes	25 years
Registered trademark	Name, logo	Yes	Unlimited
Confidential information	Unpublished secret information	No	Unlimited
Database right	Databases	No	15 years

Successful management of IPR provides the means by which individuals and institutions are able to protect their creative output from imitators.

An understanding of IP and IPRs is an increasingly important aspect of University and business life. Now, more than ever, IP is recognized as a tradable commodity.

Copyright Virtual University of Pakistan

Module 182

182. CS Impact: Security

Computer security, also known as **cyber-security** or **IT security**, is the protection of information systems from theft or damage to the hardware, the software, and to the information on them, as well as from disruption or misdirection of the services they provide. It includes controlling physical access to the hardware, as well as protecting against harm that may come via network access, data and code injection, and due to malpractice by operators, whether intentional, accidental, or due to them being tricked into deviating from secure procedures.

What are the concerns of computer security?

Computer Security is concerned with four main areas:

1. Confidentiality:- Only authorized users can access the data resources and information.

2. Integrity:- Only authorized users should be able to modify the data when needed.

3. Availability:- Data should be available to users when needed.

4. Authentication:- are you really communicating with whom you think you are communicating with

Why is computer security important?

Prevention of data theft such as bank account numbers, credit card information, passwords, work related documents or sheets, etc. is essential in today's communications since many of our day to day actions depend on the security of the data paths.
Data present in a computer can also be misused by unauthorized intrusions. An intruder can modify and change the program source codes and can also use your pictures or email accounts to create derogatory content such as pornographic images, fake misleading and offensive social accounts.

Malicious intents can also be a factor in computer security. Intruders often use your computers for attacking other computers or websites or networks for creating havoc. Vengeful hackers might crash someone's computer system to create data loss. DDOS attacks can be made to prevent access to websites by crashing the server.
Above factors imply that your data should remain safe and confidential. Therefore, it is necessary to protect your computer and hence the need for Computer Security arises.

What is firewall?

A firewall is a security-conscious piece of hardware or soft-ware that sits between the Internet and your network with a single-minded task: preventing them from getting to us. The firewall acts as a security guard between the Internet and your local area network (LAN). All network traffic into and out of the LAN must pass through the firewall, which prevents unauthorized access to the network.

Copyright Virtual University of Pakistan

Module 183

183. CS Impact: Privacy

Individual's right to own the data generated by his or her life and activities, and to restrict the outward flow of that data. Privacy uses the theory of natural rights, and generally responds to new information and communication technologies. In North America, Samuel D. Warren and Louis D. Brandeis wrote that privacy is the "right to be let alone".

From where data comes from:

- ✓ Social Sites (Facebook, twitter)
- ✓ Telephone companies (mobile networks)
- ✓ Smart city cameras on road
- ✓ Emails
- ✓ Personal Software
- ✓ Passwords, logins etc

How to handle on internet

- ✓ Emails can be encrypted
- ✓ Anonymizing proxies
- ✓ Anonymizing networks

Privacy Information

Privacy information of famous websites is given below:

- ✓ Google:

https://policies.google.com/privacy

- ✓ msn:

https://www.msn.com/en-us/autos/partner/privacypolicy

- ✓ WhatsApp:

https://www.whatsapp.com/legal/#privacy-policy

EPIC

- ✓ Electronic Privacy Information Center
- ✓ Independent non-profit research center in Wasgingon D.C. Its mission is to focus public attention on emerging Privacy and related human rights issues.
- ✓ EPIC has pursued several successful consumer privacy complaints with the US Federal Trade Commission, concerning Snapchat (faulty privacy Technology), WhatsAp (privacy policy after acquisition by Facebook (changes in user privacy settings), Google (roll-out of GoogleBuzz), Microsoft (Hailstorm log-in),issues.

PI

- ✓ Privacy International

Copyright Virtual University of Pakistan

- ✓ Charity organization of London, UK

Priority Areas:

- ✓ Challenging Data Exploitation
- ✓ Building the Global Privacy Movement
- ✓ Contesting Surveillance

Copyright Virtual University of Pakistan

Module 184

184. CS Impact: Social Issues of IT

The growth in the availability of affordable computing technology has caused a number of major shifts in the way that society operates. The majority of these have been for the better, with home computers and the internet providing unlimited access to all of the information ever created and discovered by humanity.

There are, however, some less positive social issues generated as a direct result of technological advances. In the interests of balance, it is important to analyze these and assess the severity of their impact so that steps can be taken to better understand and combat the negative effects.

1. Communication Breakdown

Socializing within a family unit has always been important, as it strengthens the bonds between us and ensures cohesion within the group. But with more and more households owning several computers and numerous portable devices granting access to information and entertainment, some argue that this is leading to a lack of family communication.

2. Defamation of Character

The only means of getting in touch with major corporations or famous people in the public eye prior to the advent of digital communication was via a stiffly written letter. This was, of course, accessible only to the intended recipient and thus a very private way for the disgruntled to vent their spleen. But first message boards and now social media services like Facebook and Twitter are being used to defame people and businesses in an intrinsically public manner.

3. Identity Theft

Fraud is another spurious activity that has been able to evolve in the wake of easily accessible computers and the internet. Perhaps most problematic and prevalent of the various fraudulent activities is identity theft, in which personal details of innocent people are harvested by a third party so that they can be used for malicious purposes. This includes carrying out illicit online transactions and other damaging activities that can have serious ramifications.

4. Cyber Bullying

As with the defamation of public figures, the internet and computers have also made it easier for spiteful people to attack people they know personally as well as perfect strangers via the anonymous platforms that are available to them.

5. Gaming Addiction

Whilst computers and the internet have made it easier for gambling addicts to get their fix, a new type of addiction has also arisen, in the form of addiction to videogames. This is something that can impact people of all ages and leads inevitably to a number of problems, from the social to the financial.

6. Privacy

Whilst high profile cases of online identity theft and fraud should have caused people to become more careful about how they use their personal information, issues of privacy and a lack of appreciation for the

Copyright Virtual University of Pakistan

risks are still widespread. This extends beyond simply giving away private data via chat rooms, message boards and e-commerce sites and extends into the compromising world of social media.

7. Health & Fitness

We are living increasingly sedentary lifestyles, because computers are removing the need for us to physically carry out many tasks, as well as keeping us rooted to one spot throughout our working days and during our leisure time.

8. Education

The educational properties of computers are well known and universally lauded but having all the information in existence on tap has its own issues. In particular, the practice of plagiarism has become a major problem, as students can simply copy and paste whole chunks of text from online sources without attributing the work to anyone else. This has become the bane of educational institutions, which tend to come down hard on detected plagiarists in order to discourage similar activities from others.

9. Terrorism & Crime

Computers have been a positive force in allowing for the creation of global movements and righteous activism in a number of forms. However, the other side of the coin is that terrorists and organized criminals also exploit the web for their own nefarious purposes.

10. Access to forbidden literature

Computer has made available the access to the forbidden literature. This has led us to many social problems in the society.

Copyright Virtual University of Pakistan

Module 185

185. CS Impact: Content Filtering, Email-Spams and Laws

Content filtering, in the most general sense, involves using a program to prevent access to certain items, which may be harmful if opened or accessed. The most common items to filter are executable, emails or websites.

How it works

Content filtering works by matching strings of characters. When the strings match, the content is not allowed through. Content filters are often part of Internet firewalls. In such a usage content filtering is serving a security purpose. Content filtering is also used to implement company policies related to information system usage. For example, it's common to filter websites like Facebook, youtube etc which are considered unrelated to work.

Spam emails

As email spam continues to become a major issue, governments around the world have put specific regulations in place to protect their citizens from spams.

Important Laws

- ✓ CAN-SPAM Act in US
- ✓ Canada's Anti-Spam Legislation (CASL)
- ✓ Anti-spam law in Europe
- ✓ Spam Act of 2003 in Australia
- ✓ Africa, Asia and South America have looser spam-law requirements

CAN-SPAM Act

1. Don't use false or misleading header information
2. Don't use deceptive subject lines
3. Identify the message as an ad
4. Tell recipients where you're located
5. Honor opt-out requests promptly
6. Monitor what others are doing on your behalf

Major requirements

- ✓ Ask for permission before adding emails
- ✓ User could identify you as Sender
- ✓ Do not give email address to others
- ✓ Be honest

Copyright Virtual University of Pakistan

Module 186

186. CS Impact: Children Protection and Electronic Theft

There are lots of reasons why people start using parental controls. Perhaps to stop late night phone checking. Perhaps to help stop arguments when it's time put the iPad down and get on with homework. Maybe to reduce the total amount of time being spent on screens in general. There are many more cases. Ultimately though all of these reasons amount to a desire for one's children to become more responsible and disciplined in their use of digital technology.

We hope and aim to encourage an attitude and approach in our kids that will render parental controls unnecessary. But how can we make sure that our use of parental controls doesn't wind up as abstract punishment or authoritarian control but is a genuine tool for building responsibility and right priorities in our kids? One method that's got quite a bit of attention on social media is the idea of a parent/child cell phone contract.

The following risks are involved in such scenarios:

- ✓ Content Risks.
- ✓ Contact Risks
- ✓ Online Marketing
- ✓ Overspending
- ✓ Electronic Theft
- ✓ Information Privacy
- ✓ Information Security

Content Risks

- ✓ Illegal Content
- ✓ Harmful Content
- ✓ Harmful Advice

Contact Risks

- ✓ Online Harassment
- ✓ Cyberbullying
- ✓ Illegal interactions
- ✓ Problematic content sharing

Online Marketing

- ✓ Inappropriate or unsuitable products
- ✓ Illegal and Age-restricted products

Electronic Theft

- ✓ Online Fraud
- ✓ Online scam
- ✓ Identify theft

Copyright Virtual University of Pakistan

Information Privacy

- ✓ Personal data collection from children

Information Security

- ✓ Malicious code
- ✓ Commercial spyware

How to protect

- ✓ Web Filtering
- ✓ Parental control software
- ✓ Enable safety features
- ✓ Guide kids

Copyright Virtual University of Pakistan

Module 187

187. Word Processing: MS Word

One of the most important application software are the word processors. These software help individuals and companies to prepare digital documents in a proper format. One of the famous word processing software is MS Word, which is included in the Microsoft Office.

Figure 130 is the screen short for windows XP to open MS Word 2007.

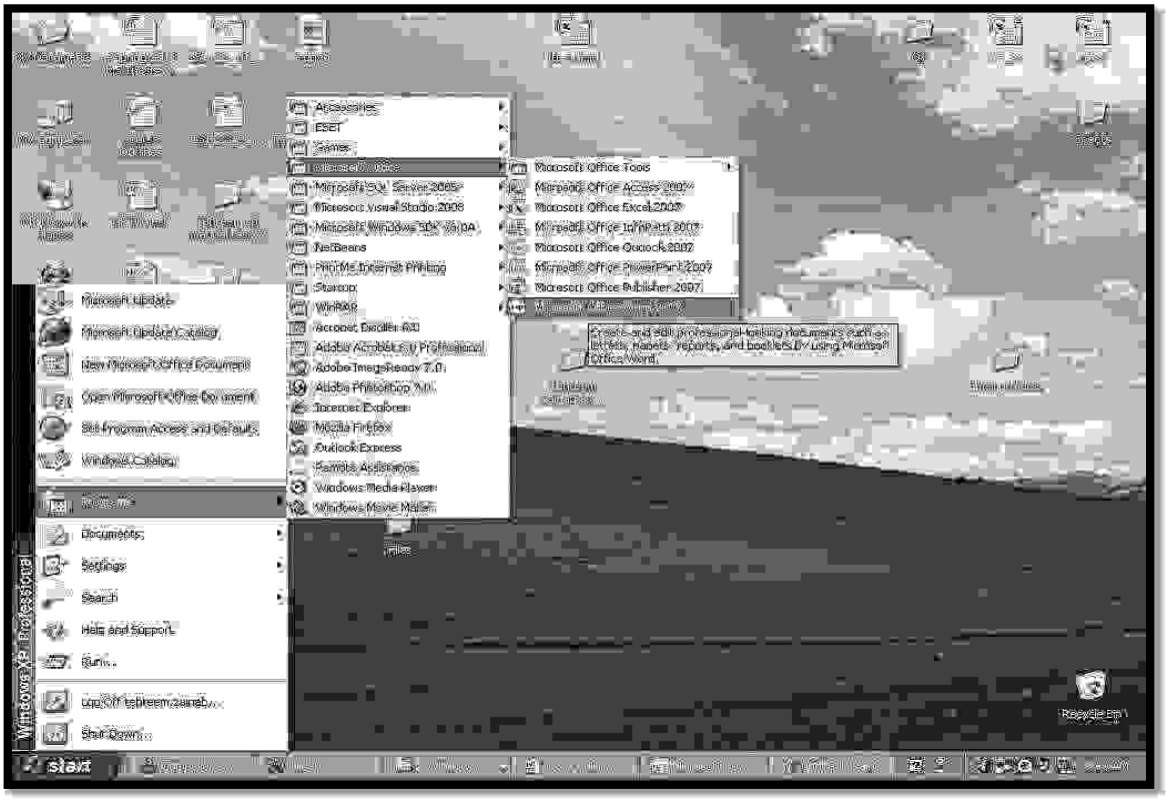


Figure 130: Start Menu to launch MS Word

The Office Button

Figure 130 shows the MS word home ribbon.

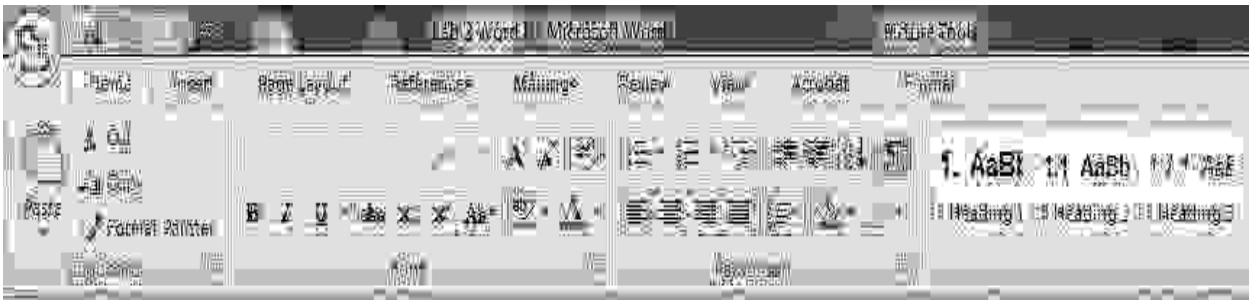


Figure 131: MS Word Home ribbon

Copyright Virtual University of Pakistan

 The colorful icon in the top left-hand corner of the **Word** window (Figure 131) is the **Office button.** When you point to the Office button with the mouse pointer it will turn orange**.** When you click the left mouse button while pointing to the Office button, a menu will open that contains some of the most commonly used commands which used to be found in the **File** drop-down menu in earlier versions of **Word**. **Recent documents** are listed in the **Recent Documents** pane on the right side of the menu as shown in Figure 132.



Figure 132: MS Word home ribbon after click

The ribbon is divided into Tabs, Groups, and Commands.

Each tab opens a different ribbon with groups of commands inside it. Microsoft has tried to make the placement of the commands within both groups and tabs as intuitive as possible to make them easy to find. By using the Ribbon system, the user has many less mouse clicks to execute the desired command.

The items on the ribbons are grouped together by common task. The main ribbon is the Home Tab/ribbon. The home tab/ribbon in Excel and PowerPoint are similar. Below is the image of MS Word Home Ribbon.

Below is the explanation of different components in the home ribbon of MS Word 2007.

 In the lower right-hand corner of some groups is a small down pointing arrow. These are referred to as **Dialog Expanders** or **Launchers**. Clicking on the arrow will open a **Dialog window** or a **Command pane**. The dialog box may provide additional options that may not be contained on the active tab. Most of the dialog boxes that appear should be familiar; many are taken directly from earlier versions of the program.

The Ribbon has three types of Commands:

- Simple Buttons
- Drop-down menus Buttons
- Launchers (or Dialog Expanders) Buttons

Simple Buttons work as **Toggles** or **on/off switches**. When the command is off it will be surrounded by blue and look like all other commands as shown in the Figure 133. When a command button is on, it will be surrounded by orange. A command will only work when it is on. **Bold** is an example of a button as shown in Figure 133.

Copyright Virtual University of Pakistan



Figure 133: Font Panel

If you aren't sure what a command is or what a command does, place the mouse pointer over the command and hold it there. A text box will open up. The text box contains the command name, the keyboard shortcuts for the command, along with an explanation of the command as shown in the Figure 134.

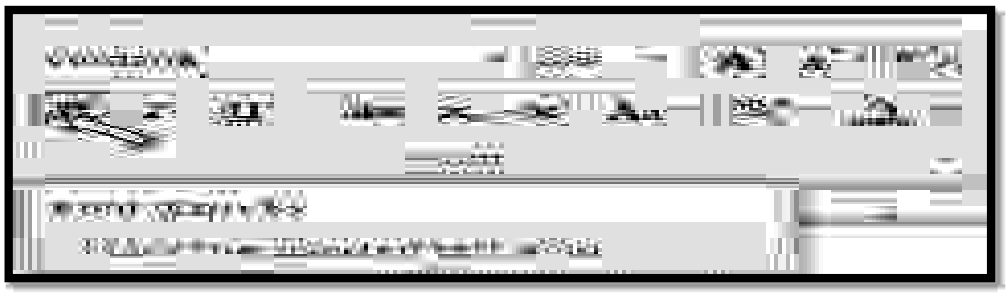


Figure 134: Bold Clicked in Font Panel

Drop-down menu buttons will have a down arrow to the right of the command. Just like buttons, the drop-down menu command will be surrounded by orange and the drop-down list will open up. **Change case** control is an example of a drop-down menu as shown in the Figure 135.

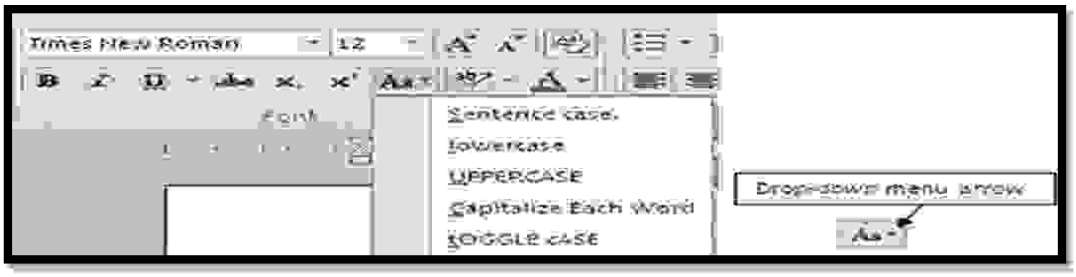


Figure 135: Font Panel Changing Case

Some commands are a combination of a **simple button** and a **drop-down menu button**. There are two buttons for these commands. The left button is a simple button and the right buttons is drop-down menu arrow button. If one clicks on the simple button the default value will be used, if one click on the drop-down menu arrow there will be a number of options available from which to choose. The default value is the last used value for the command. **Underline** is an example of a combination command as shown in the Figure 136.

Copyright Virtual University of Pakistan

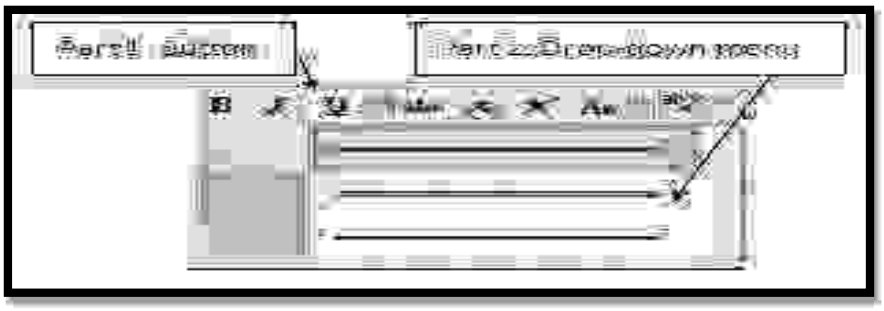


Figure 136: Underline Panel

Launcher (or Dialog Expanders) buttons

Launcher (or Dialog Expanders) buttons as shown in figure 8are usually displayed in the bottom right corner of some groups. Clicking the launcher button will open up a series of options either in a Task pane (such as the Clipboard) or a Dialog window such as the Font group.



Figure 137: Panel Launch Buttons

Mini Tool Bar

The Mini Toolbar appears automatically whenever you select text and contains common text formatting commands as shown in the Figure 138. To Use the Mini Toolbar: Select the text you want to format and click the desired command on the Mini Toolbar. Click anywhere outside the Mini Toolbar to close it.

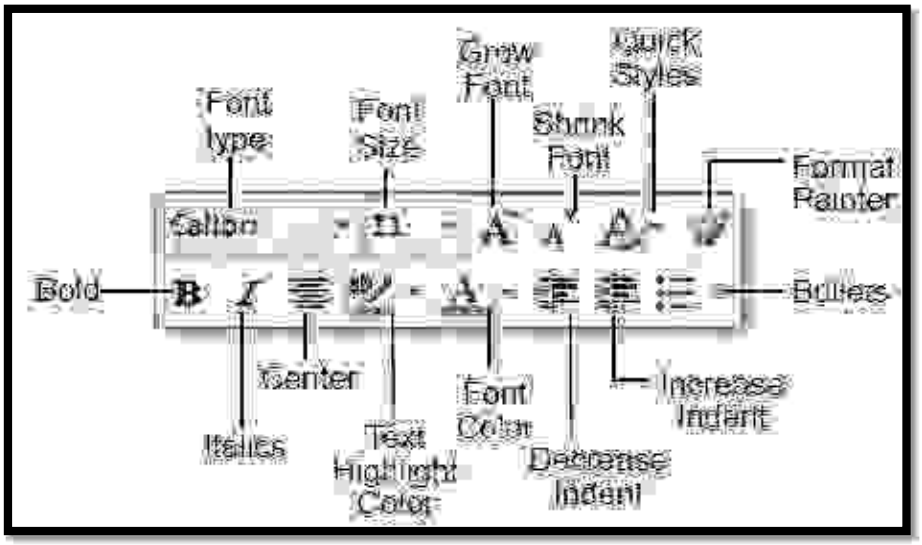


Figure 138: Mini Toolbar

Copyright Virtual University of Pakistan

Module 188

188. Word Processing: MS Word (Quick Access bar)

The Quick Access Toolbar (Figure 139) provides easy access to the commands you use most frequently. The Save, Undo, Redo/Repeat, and Quick Print buttons appear on the Quick Access Toolbar by default, but you can add and remove commands to meet your needs. You can quickly reverse most commands you execute by using Undo. If you then change your mind again, and want to reapply a command, you can use Redo as shown in the Figure 139.

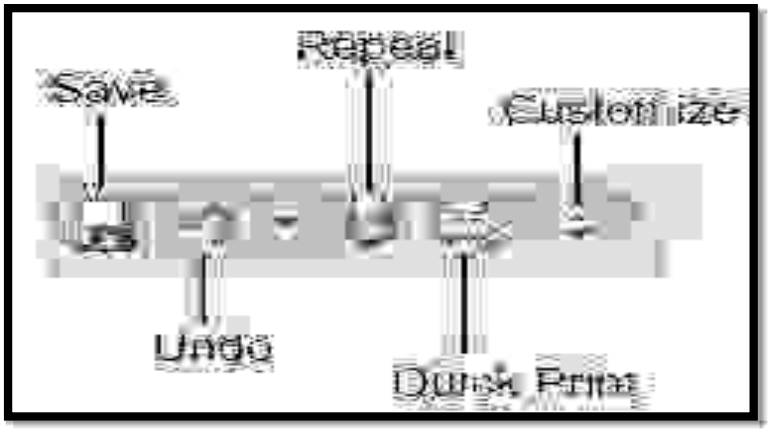


Figure 139: Quick Access toolbar

Exercise

1. Type word “Undo example”.
2. Click the Undo button on the Quick Access menu. The typing disappears.
3. Click the Redo button on the Quick Access menu. The typing reappears.
4. Select "Undo example."
5. Press Ctrl+b to bold. Word bolds the text.
6. Press Ctrl+i. Word italicizes the text.
7. Press Ctrl+u Word underlines the text.
8. Click the down arrow next to the Undo icon. You will see the actions you performed listed. To undo the underline, click Underline; to undo the underline and italic, click Underline Italic; to undo the underline, italic, and bold click Bold etc.
9. To redo, click the Redo icon several times.

Alternate Method -- Undo & Redo by Using Keys

1. Type word “Undo example”.
2. Press Ctrl+z. The typing disappears.
3. Press Ctrl+y. The typing reappears.
4. Select "Undo example."
5. Press Ctrl+u to underline.
6. Press Ctrl+z. The underline is removed.
7. Press Ctrl+y. The underline reappears.

Copyright Virtual University of Pakistan

Module 189

189. Word Processing: MS Word (Home Ribbon)

The home ribbon is one of the most important ribbon available in the MS Word. Figure 140 shows the home ribbon. It contains different important groups such as: Clipboard, Font, Paragraph, Styles and Editing. We will be learning each module of home ribbon in the next modules in details.

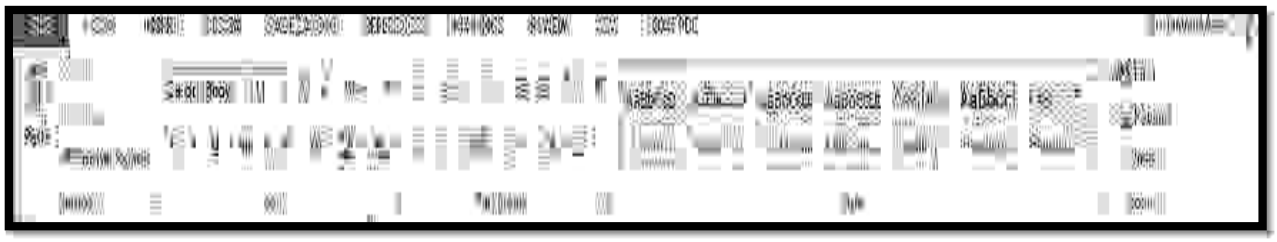


Figure 140: Home ribbon

Copyright Virtual University of Pakistan

Module 190

190. Word Processing: MS Word (Clipboard Group)

The **Home** ribbon is made up of the most used commands in Word. The first group on the **Home** ribbon is the **Clipboard. Copy**, **Cut**, **Paste** and **Format Paste** are the commands within the Clipboard group as shown in the Figure 141. The Clipboard commands are on the Home ribbon of **Word** and all other Office 2007 applications that use the ribbon. The dialog expander arrow of the Clipboard group will open up the **Clipboard pane**, showing all items that can be pasted.

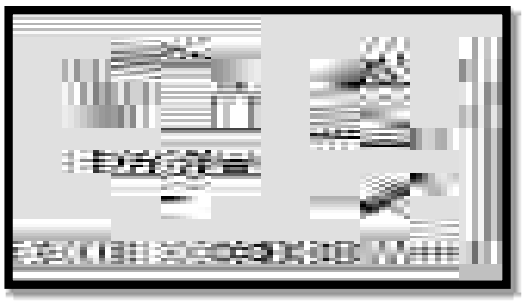


Figure 141: Clipboard Group

Cut and Paste

You can use Word's Cut feature to remove text from a document. You can use the Paste feature to place the information you cut anywhere in the same or another document. In other words, you can move information from one place in a document to another place in the same or different document by using the Cut and Paste features. The Office Clipboard is a storage area. When you cut, Word stores the data you cut on the Clipboard. You can paste the information that is stored on the Clipboard as often as you like.

Cut with the Ribbon

1. Type the following:
   I want to move. I am content where I am.
2. Select "I want to move."
3. Choose the Home tab.
4. Click the Cut button  in the Clipboard group as shown in the Figure 142. Word cuts the text you selected and places it on the Clipboard. Your text should now read:
   "I am content where I am."

Copyright Virtual University of Pakistan

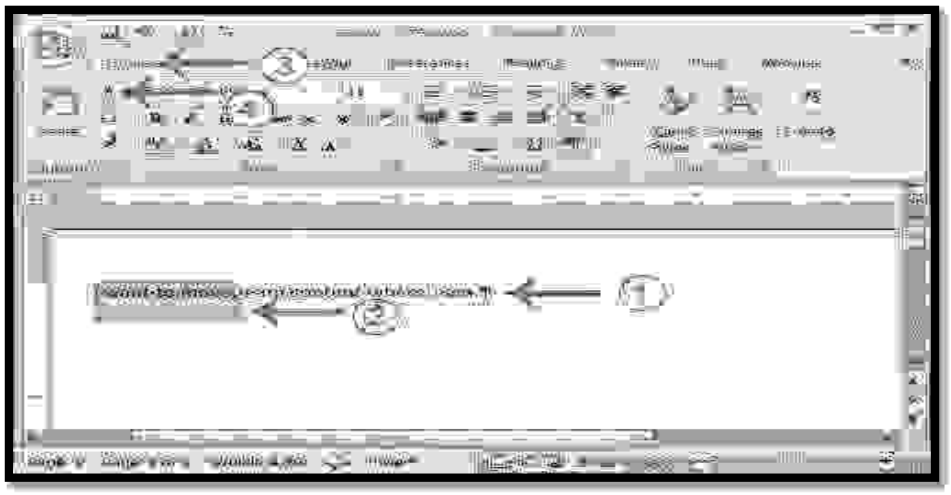


Figure 142: Cut option in clipboard group

Paste with the Ribbon

1. Place the cursor after the period in the sentence "I am content where I am."
2. Press the spacebar to leave a space.
3. Choose the Home tab.
4. Click the Paste button  in the Clipboard group as shown in the Figure 143. Word pastes the text on the Clipboard. Your text should now read:

"I am content where I am. I want to move."

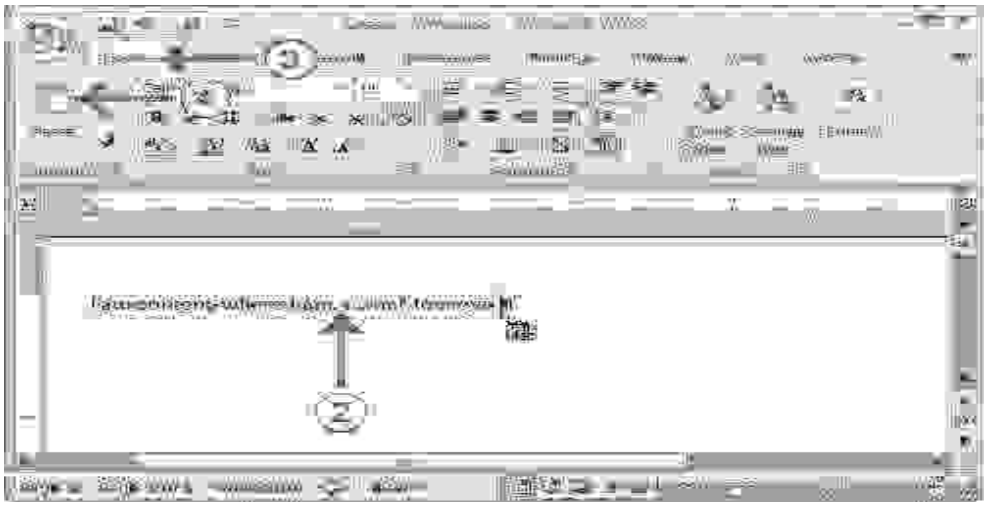


Figure 143: Pasting in Document

Alternate Method—Cut with a Context Menu

1. Type the following:
   I want to move. I am content where I am.
2. Select "I want to move."

Copyright Virtual University of Pakistan

3. Right-click. The Mini toolbar and a context menu appear.
4. Click Cut on the menu as shown in the Figure 144. Your text should now read: "I am content where I am."



Figure 144: Pasting in Document (Alternate Method)

Alternate Method—Paste with a Context Menu

1. Place the cursor after the period in the sentence "I am content where I am."
2. Press the spacebar to leave a space.
3. Right-click. A Mini toolbar and a context menu appear as shown in the Figure 145.
4. Click Paste. Your text should now read:

"I am content where I am. I want to move."

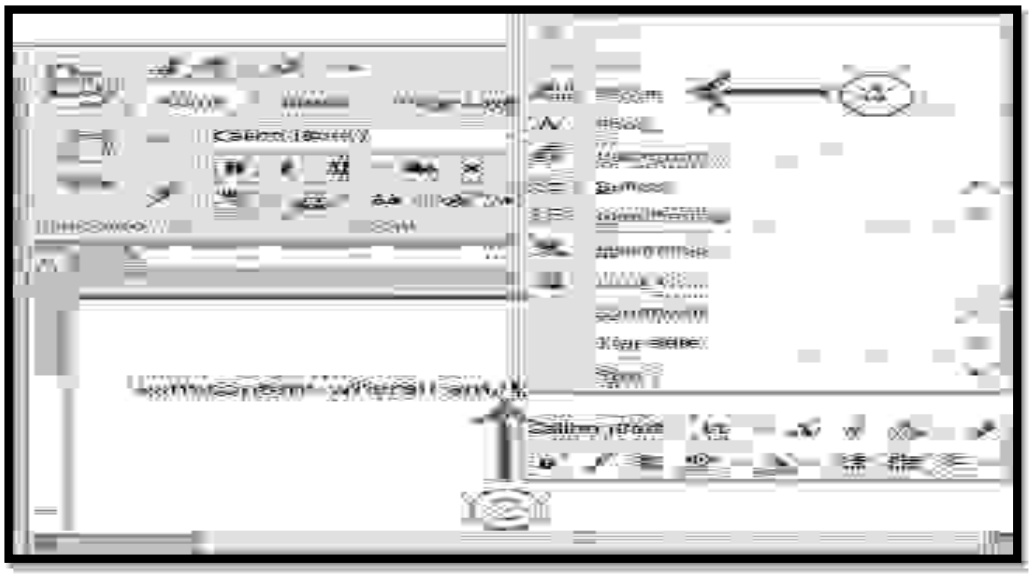


Figure 145: Pasting in Document (Alternate Method)

Copyright Virtual University of Pakistan

Alternate Method—Cut with Keys

1. Type the following:

I want to move. I am content where I am.

2. Select "I want to move."
3. Press Ctrl+x.

Your text should now read: " I am content where I am."

Alternate Method—Paste with Keys

1. Place the cursor after the period in the sentence: "I am content where I am."
2. Press the spacebar to leave a space.
3. Press Ctrl+v.
4. Your text should now read:
   "I am content where I am. I want to move."

Copyright Virtual University of Pakistan

Module 191

191. Word Processing: MS Word (Font Group)

The second group of commands on the Home ribbon is the Font group. The font group commands are format enhancing tool that includes font typefaces, font size, font effects (bold, italics, underline, etc.), colors and more. Remember that you can preview how the new font will look by highlighting the text, and hovering over the new font typeface as shown in the Figure 146. The expander arrow in the Font group will open up the Font dialog window.



Figure 146: Font group

7.1.1 Basic Text Editing (Font Group Task)

Type your name in document window at insertion point as shown below in the Figure 147.

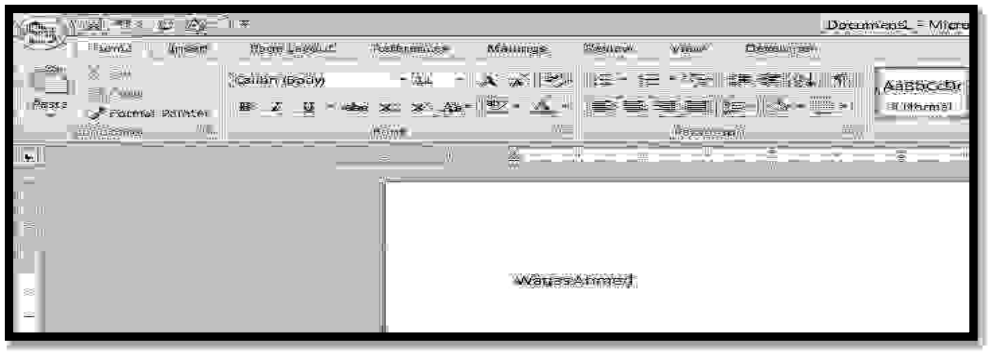


Figure 147: Typing your name

Change the font of your name to Arial. (Home Tab -> Font Group -> Font Arrow) as shown in the Figure 148.

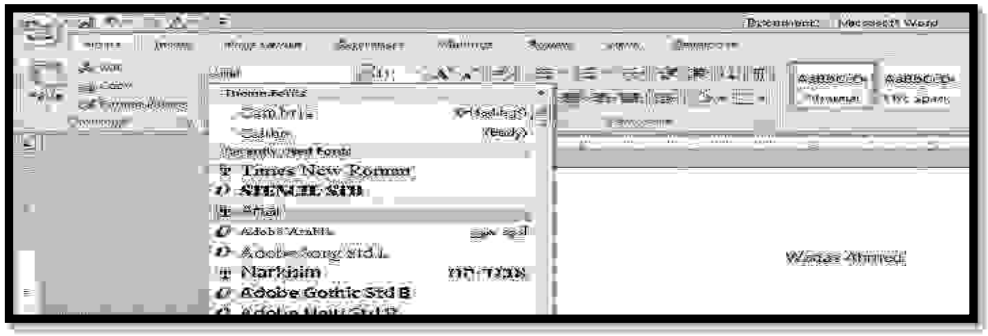


Figure 148: Changing font

Copyright Virtual University of Pakistan

By keep selecting the name, make it bold and underlined. (Home Tab ->Font Group -> Bold & Underline Buttons) as shown in the Figure 149.

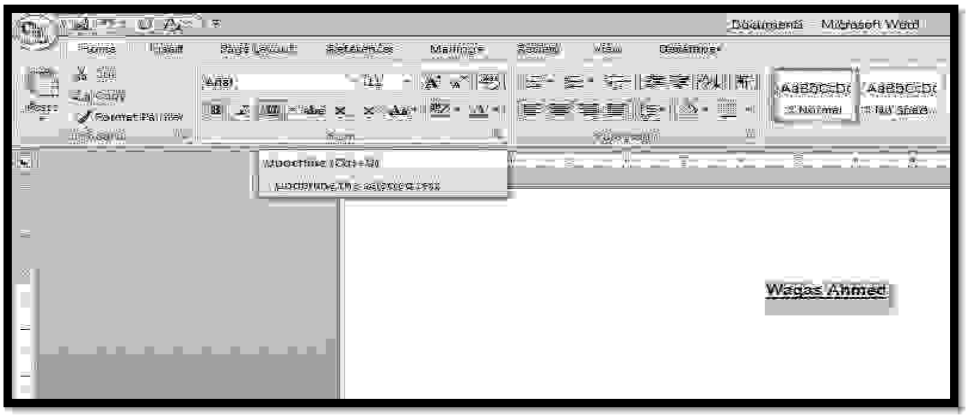


Figure 149: Applying bold and underline

Change the font size of your name to 24. (Home Tab -> Font Group -> Font Size Arrow) as shown in the Figure 150.

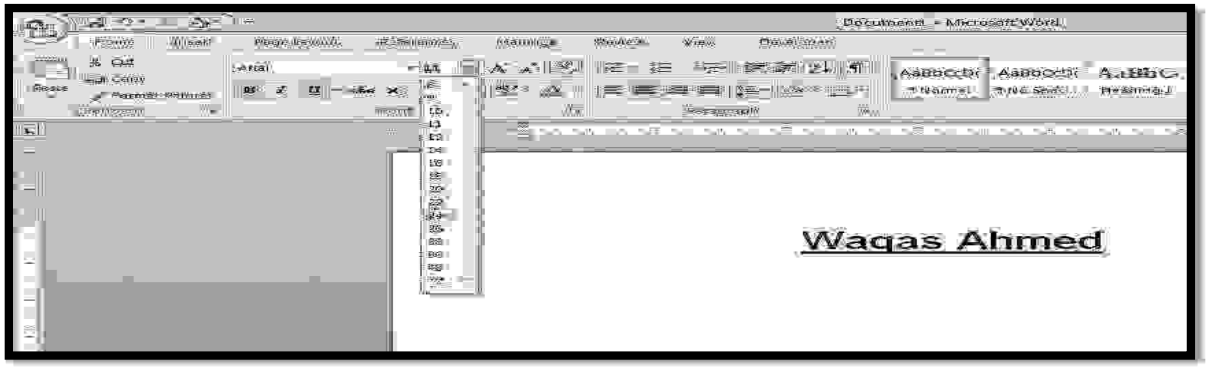


Figure 150: Changing Font Size

Copyright Virtual University of Pakistan

Module 192

192. Word Processing: MS Word (Paragraph Group-I)

The third group on the Home ribbon is the **Paragraph** group. The paragraph group allows you to change **Paragraph Alignment** (left, right, centered, or justified), adjust **Line Spacing** within a paragraph, and adjust **spacing before and after paragraphs,** along with working with paragraph **Indentation** as shown in figure 151**.** This is also the area where you can add **bullet lists**, number **lists**, or **outlines form** to a documents. The Dialog expander arrow will open the **Paragraph dialog** window.

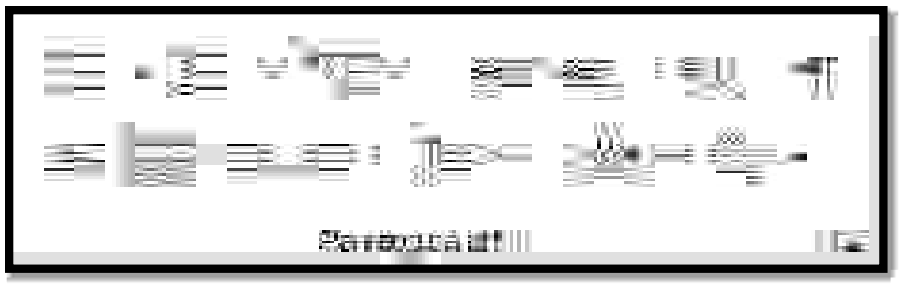


Figure 151: Paragraph Group

Bullets and Numbers

If you have lists of data, you may want to bullet or number them. When using Microsoft Word, bulleting and numbering are easy. The first part of this lesson teaches you to bullet and number.

In Microsoft Word, you can easily create bulleted or numbered lists of items. Several bulleting and numbering styles are available, as shown in the examples. You can select the one you wish to use as shown in the Figure 152 and Figure 53.



Figure 152: Numbers varriations in paragraph group

Copyright Virtual University of Pakistan



Figure 153: Bullets variations in paragraph group

Copyright Virtual University of Pakistan

Module 193

193. Word Processing: MS Word (Paragraph Group-II)

You can create your own bullet library. Perform the following steps:

1. Type the following list as shown:

Apple
Orange
Grape
Mango
Cherry

2. Select the words you just typed.

3. Choose the Home tab.

4. In the Paragraph group, click the down arrow next to the Bullets button  . The Bullet Library appears.

5. Click to select the type of bullet you want to use as shown in the Figure 154. Word adds bullets to your list.

Note: As you move your cursor over the various bullet styles, Word displays the bullet style onscreen.

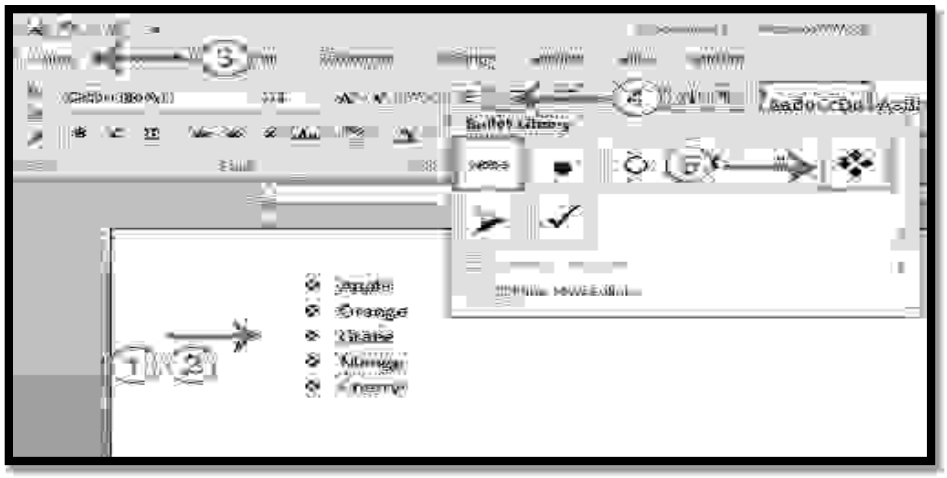


Figure 154: Bullet selection

To remove the bulleting:

1. Select the list again.
2. Choose the Home tab.
3. In the Paragraph group, click the down arrow next to the Bullets icon. The Bullet dialog box appears.
4. Click None. Word removes the bullets from your list.

Copyright Virtual University of Pakistan

Numbers Task

1. Type the following list as shown:

Apple Orange Grape Mango Cherry

2. Select the words you just typed.
3. Choose the Home tab.
4. In the Paragraph group, click the down arrow next to the Numbering button  . The Numbering Library appears as shown in the Figure 155.

Click to select the type of numbering you want to use. Word numbers your list. **Note:** As you move your cursor over the various number styles, Word displays the number style onscreen.

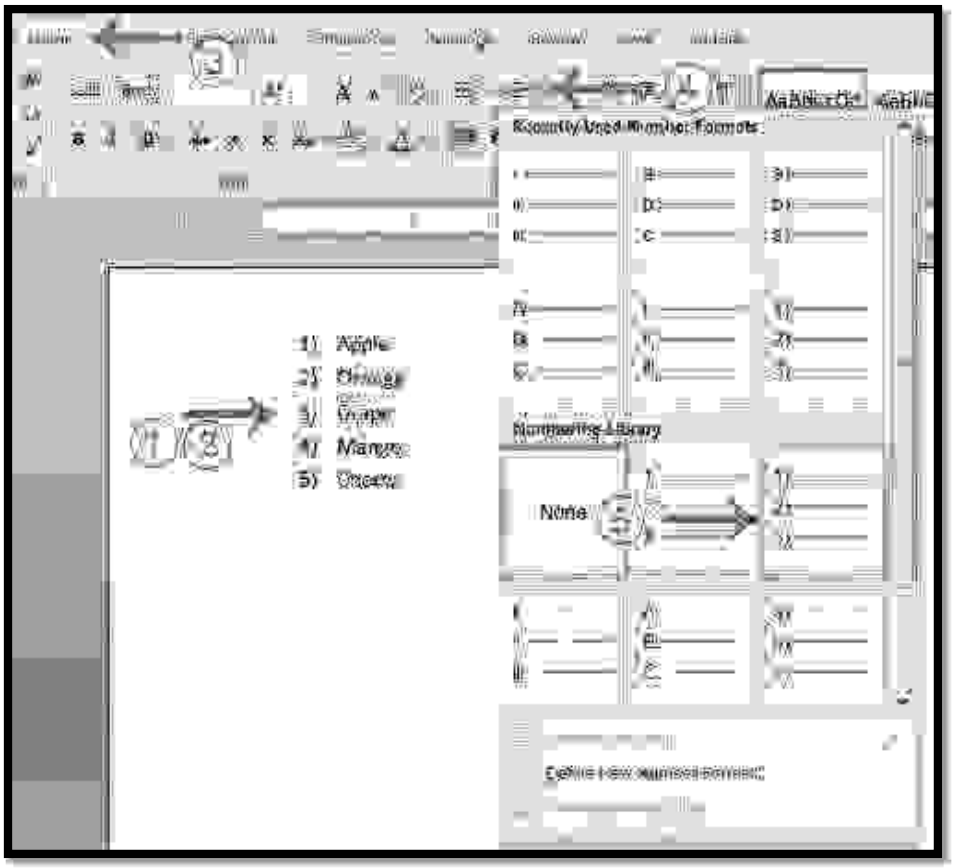


Figure 155: Adding Numbered Lists

To remove the numbering:

1. Select the list again.
2. Choose the Home tab.
3. In the Paragraph group, click the down arrow next to the Numbering icon. The Number dialog box appears.
4. Click None. Word removes the numbering from your list.

Copyright Virtual University of Pakistan

Module 194

194. Word Processing: MS Word (Style Group)

The fourth group on the Home ribbon is the **Style** group as shown in the Figure 156. Styles are a collection of formatting options that you can apply to text. When you use styles to format your document, you can quickly and easily apply a set of formatting choices consistently throughout your document.



Figure 156: Style Group

A **style** is a set of **formatting characteristics**, such as font name, size, color, paragraph alignment and spacing. Some styles even include borders and shading. For example, instead of taking three separate steps to format your heading as 16-point, bold, Cambria, you can achieve the same result in one step by applying the built-in Heading 1 style. You do not need to remember the characteristics of the Heading 1 style. For each heading in your document, you just click in the heading (you don't even need to select all the text), and then click Heading 1 in the gallery of styles.

Copyright Virtual University of Pakistan

Module 195

195. Word Processing: MS Word (Editing Group)

The Fifth and final group (Figure 157) on the Home ribbon is the **Editing** Group. The commands in the Editing group are **Find**, **Replace**, and **Select**. When you create a document in Microsoft Word, you may decide to change a certain word or phrase that is repeated throughout the document. Let the computer do the hard work with the **Find** and **Replace** feature in Word and you can be sure you didn't miss any.



Figure 157: Editing group

Under the **Find** command, there is the **Go To** command. The Go To command can be used to immediately go to a page, a section or any marked location within your document.

The **Select** command can be used for different purpose.

- To select all of the text in the document, click **Select All**.
- To select shapes that are hidden, stacked, or behind text, click **Select Objects**, and then draw a box over the shapes.
- To select text with similar formatting, click **Select Text with Similar Formatting**.

Copyright Virtual University of Pakistan

Module 196

196. Word Processing: MS Word (Insert Functionalities)

Insert Tab can be used if you want to add to graphics or link your document with another document. The initial part of the insert tab in word ribbon has been shown in the Figure 158.

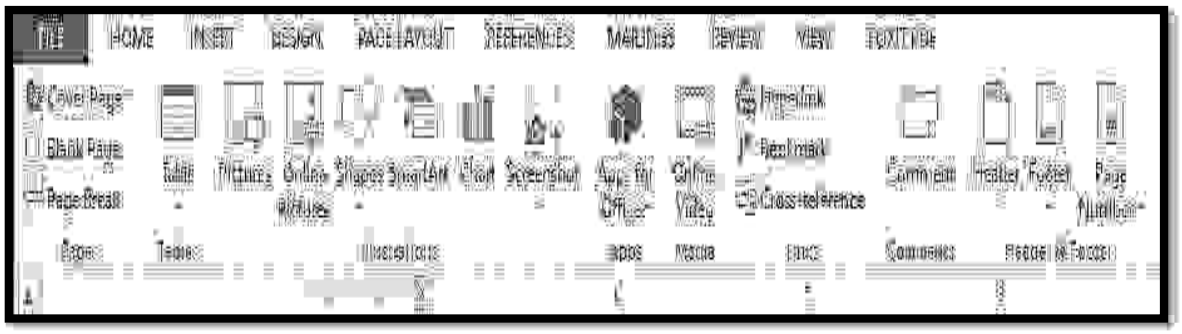


Figure 158: Inert tab

In the insert tab, the following groups are available which will be covered in the next modules:

- ✓ Pages Group
- ✓ Tables Group
- ✓ Illustrations Group
- ✓ Media
- ✓ Links
- ✓ Comments
- ✓ Header & Footer
- ✓ Text
- ✓ Symbols

Copyright Virtual University of Pakistan

Module 197

197. Word Processing: MS Word (page Group)

Pages group is in the far left of the insert tab. You can insert from the three categories for pages which are; Cover Page, Blank Page, and Page Break as shown in the Figure 159. These features are useful if you are creating a professional or long document.

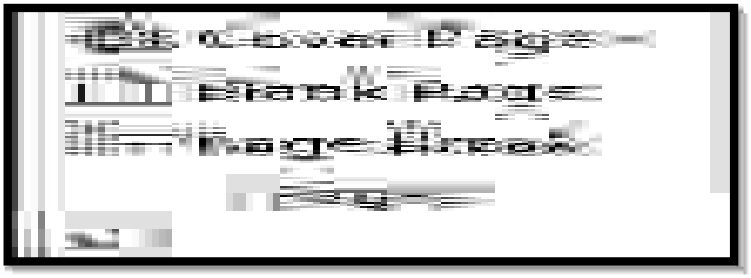


Figure 159: Pages group in the insert tab

Cover Page

Cover Page is the title page of the document. Word 2007 provides a number of preformed cover pages to give your document a professional look.

Cover page Exercise: Creating a Cover Page

1. Click the **Insert** tab to make it the active tab as shown in the Figure 158.
2. To open the **Built-in Cover Page Gallery**, click the **down arrow** to the right of **Cover Page** in the **Pages** group on the **Insert** tab as shown in the Figure 160.

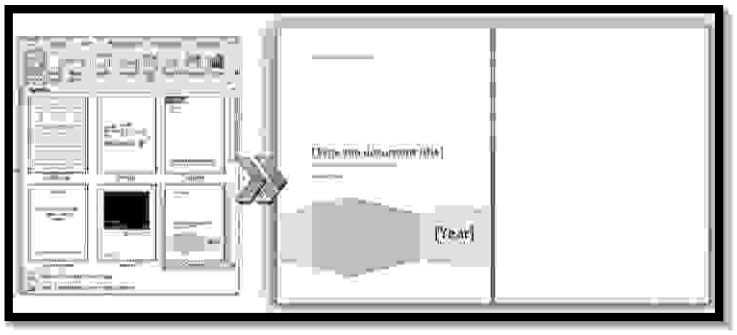


Figure 160: Inserting Cover Page

3. Scroll down and **click** the desired cover for the document from the **Cover Page Gallery**. Use the scroll bar or scroll arrow to see all the cover page choices.
4. A Cover page will be added to your document.

Remove the Cover Page

1. Click the **Insert** tab to make it the active tab.
2. To open the **Built-in Cover Page Gallery**, click the **down arrow** to the right of **Cover Page** in the Pages group on the **Insert** tab.

Copyright Virtual University of Pakistan

3. Scroll down and select **Remove Current Cover Page** as shown in the Figure 161.

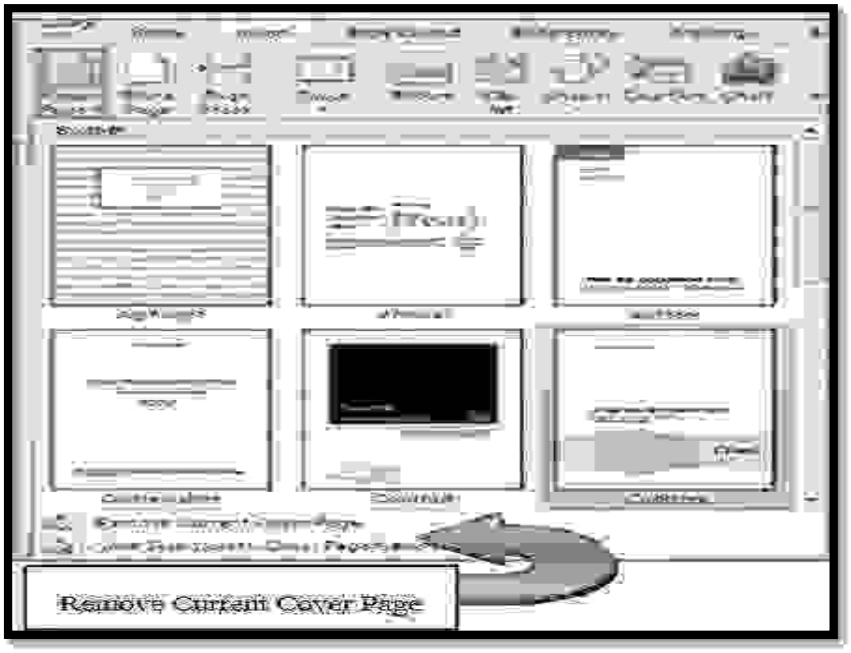


Figure 161: Removing cover page

Blank Page

Generally, Word inserts a blank page automatically while you are typing. Blank Page in Insert tab can help you add a new page anywhere in a document when required.

Try inserting a blank page to your document.

1. Click where you want to insert a new page i.e. before or after some text.
2. Click on Blank Page in Insert Tab (Figure 158).

Page Break

Page Break button will force a page break anywhere you select in your document.

1. click where you want to insert Page Break
2. Click page break (Figure 158).

Copyright Virtual University of Pakistan

Module 198

198. Word Processing: MS Word (Table Group)

Word provides tables option for placing data in a more formal way.

1. Click on table in insert tab. (Figure 162).



Figure 162: Tables group

2. To add Rows and Columns, select top to bottom for rows & left to right for columns (Figure .163)
3. Click to apply when happy with the selection.
4. Click on the box to enter text.
5. Observe the new tab opened "Table Tools". You can use this tool to apply further formatting to your created table

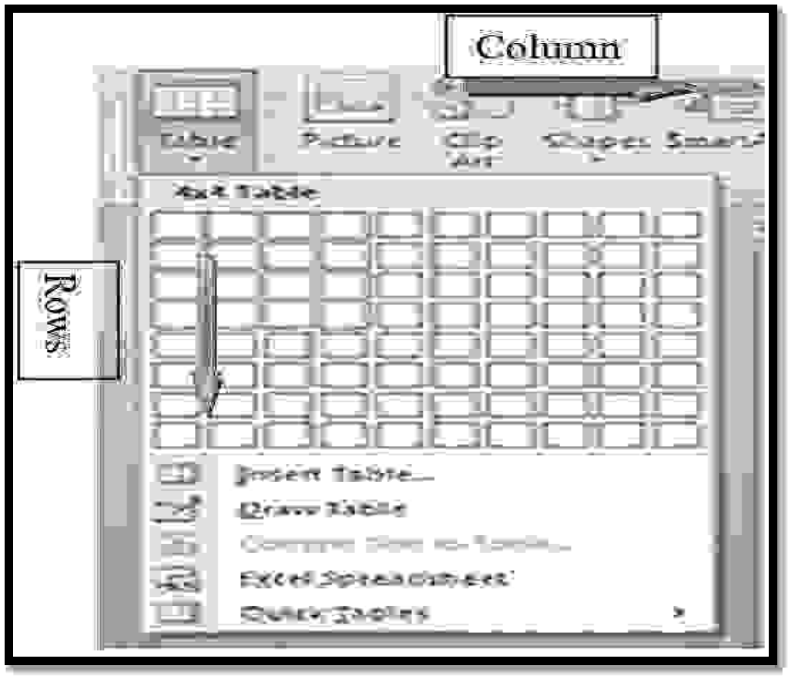


Figure 163: Selecting Rows and Columns

Copyright Virtual University of Pakistan

Module 199

199. Word Processing: MS Word (Illustration Group)

Using Illustrations (Figure 164), you can add pictures of all types and styles to your document. Followed is detail description on how to add illustrations.

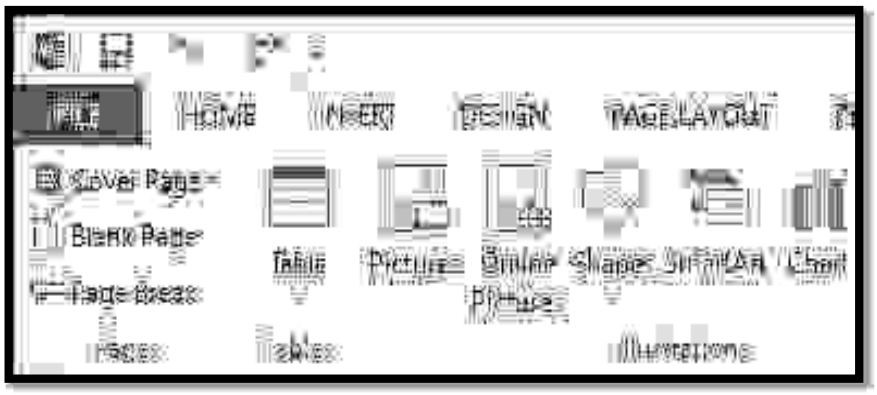


Figure 164: Illustrations

Picture

The first selection in Illustrations is Insert a picture from a file. When you click on this a window will open for you to browse to a photograph or other picture you have saved on your computer.

Clip Art

To illustrate a specific concept, you can Insert Clip Art in your document, including media file (sound and video clips) and drawing.

Shapes

Word 2007 provides a wide range of shapes (Figure 165) to select and insert in your document as per your requirement. It also provides Canvas to place all the Shapes at one place without being disturbed when further changes are made as shown in the figure 166. Each shape belongs to one of the following subcategory i.e. Lines, Basic Shapes, Block Arrows, Flow Charts, Callouts, Stars and Banners.

1. Click on Shapes in Insert Tab and draw a new Canvas Figure 165.
2. Insert shapes given in Figure 166.
3. Arrange inserted shape to form Snow Man as done in Figure 167.

Copyright Virtual University of Pakistan

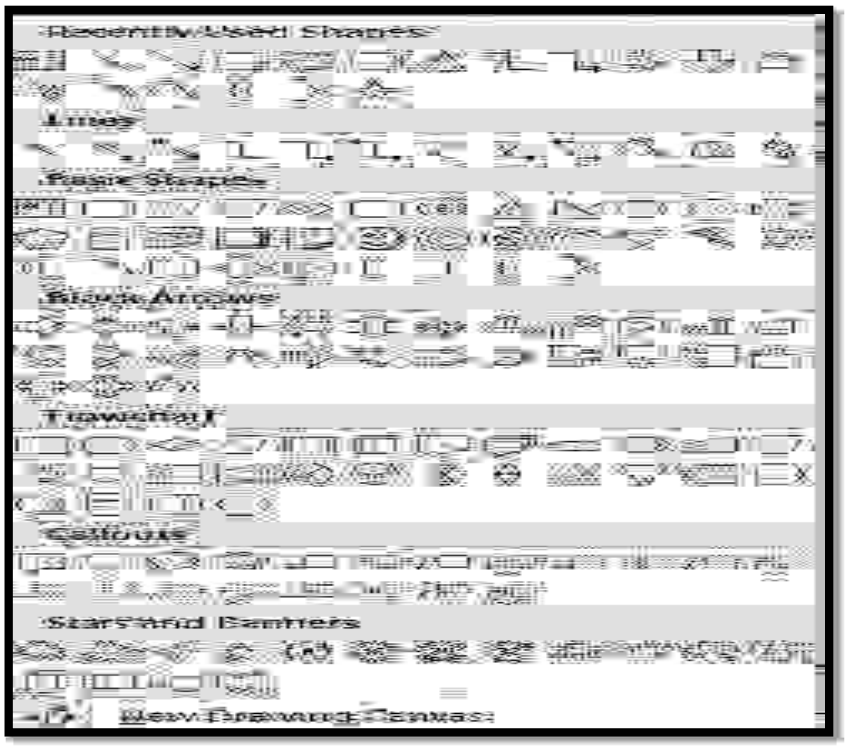


Figure 165: Shapes types in Word

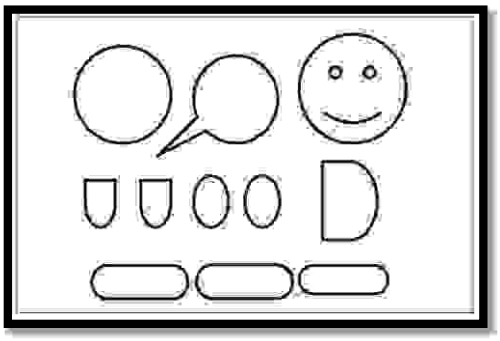


Figure 166: Shapes required to make snowman




Figure 167: Snowman

Copyright Virtual University of Pakistan

Smart Art

A new feature introduced in Word 2007 is Smart Art. Using Smart Art, you can communicate your ideas visually. Whether it's a process, hierarchy or life cycle all can be illustrated using Smart Art as shown in the Figure 168.

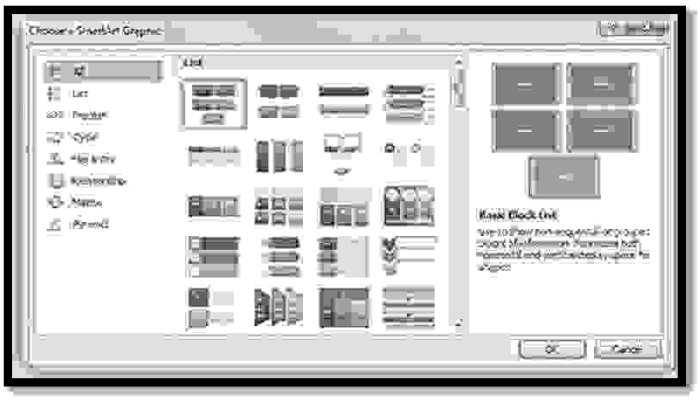


Figure 168: Smart Art

Exercise: How to add Cycle Smart Art

1. Click on Smart Art Button in Illustration group of Insert Tab
2. Click Cycle in the left pane of opening window (Figure 169)
3. Select Basic Cycle Figure 169.
4. Click On [TEXT] to add text. "Baby", "Child", "Teen" and "Adult". Notice the extra Circle left (Figure 170).

Click on the remaining circle and press Delete (Del) Key on your keyboard to remove it (Figure 171).

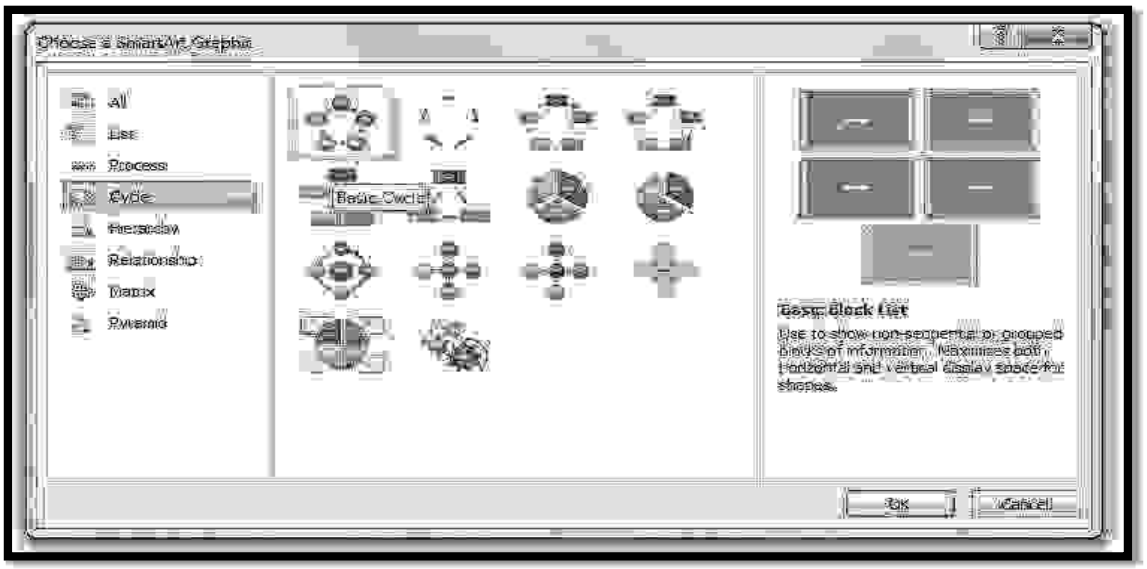


Figure 169: Basic cycle

Copyright Virtual University of Pakistan

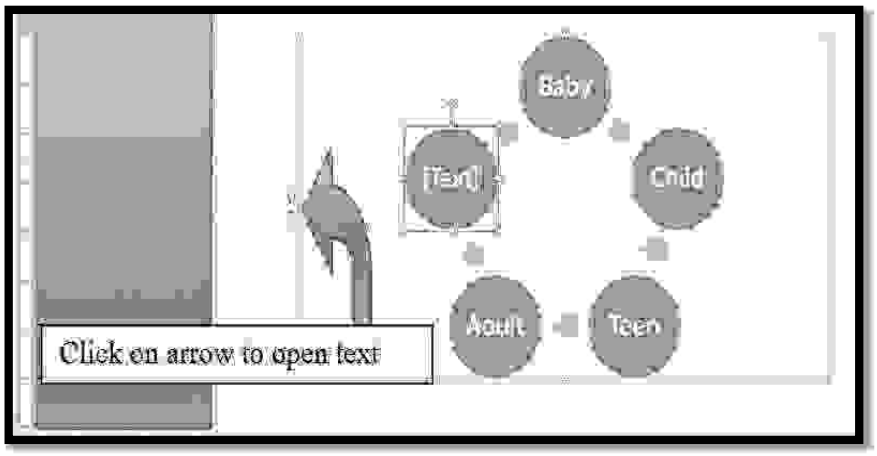


Figure 170: Human Life Cycle

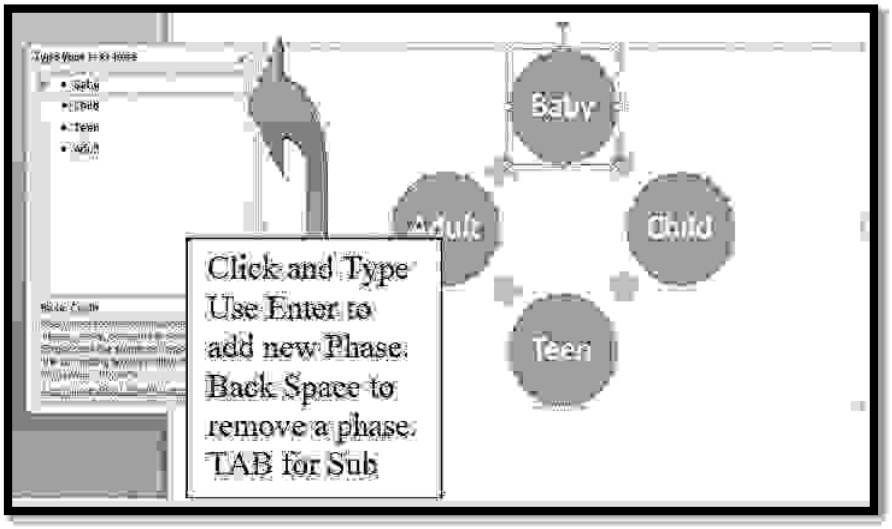


Figure 171: Adding and Removing Objects

Copyright Virtual University of Pakistan

Module 200

200. Word Processing: MS Word (Media and Links Groups)

Links toolbox (Figure 172) in Insert tab helps link other documents in your current document and also helps you keep track of reading by providing Bookmark facility.



Figure 172: Links group

Hyperlink

Hyperlink is used to add link of other documents or web pages in your Document. Here is how you can add Hyperlink. Click on hyperlink in insert ribbon tab, a window will open as in the Figure 173.

1. Enter word or phrase to display hyperlink
2. Click to add text displayed when mouse is over the hyperlink text
3. Select Bookmark
4. Select respective option to locate file or web links that you want to add in document
5. Address bar
6. You can link to various files i.e. existing file in your system, link to place within document (ideal to link table of contents with headings).

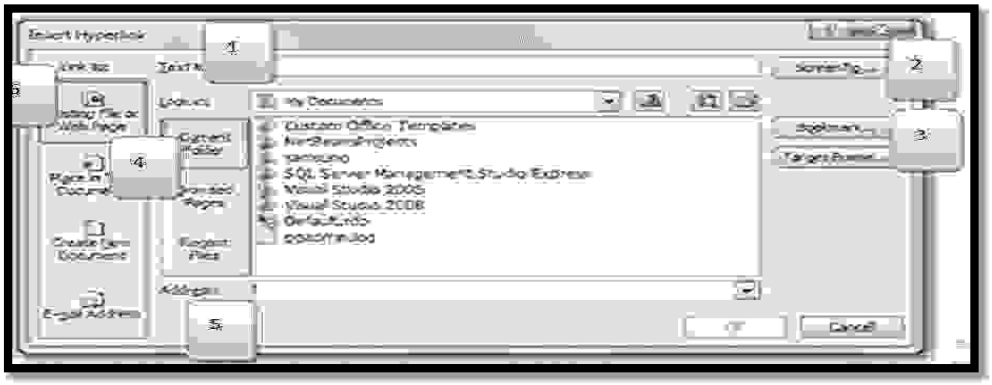


Figure 173: Adding Hyperlink

Bookmarks

Bookmarks are a way to keep track of reading. They are similar to bookmarks you keep while reading a favorite novel or story book like, turn the corner of the page or place pen or pencil.

Bookmarks Exercise: How to Use Bookmark

1. Click where you want to place bookmark.
2. From insert ribbon tab select bookmark (Figure 174)
3. Enter bookmark name say" Mark1" (without space) and click add.

Copyright Virtual University of Pakistan

4. To continue from where you placed bookmark repeat step 2 and select saved "Mark1" bookmark.



Figure 174: Adding Bookmark

Copyright Virtual University of Pakistan

Module 201

201. Word Processing: MS Word (Comments and Header & footer)

Header and Footers are areas where you can add Text or Graphics. Any formatting applied in these areas will be shown throughout the document. A header is at the top margin; a footer is printed in the bottom margin For Example observer the top of this page and all the pages in the document you will see same header and footer format.



Figure 175: Header and Footer

Exercise: How to Use Header & Footers

1. Click on insert ribbon tab select header.
2. Page header will open in edit mode. (Figure 176)
3. Enter text "Virtual University of Pakistan, as shown in the Figure 176.
4. Close header& footer (Figure 177).

Similarly, you can add footer. Please note you can even add images to the header, footer or both.



Figure 176: Header in edit mode



Figure 177: After Header Insertion

Copyright Virtual University of Pakistan

Module 202

202. Word Processing: MS Word (Text Group (Part-1))

Text Box in Insert Ribbon tab can be used to add graphical formatting. This has been shown in the Figure 178.



Figure 178: Text group

Exercise: How to Use Text box (Figure 179)

1. Click the Text Box button, located in the Text group on the Insert tab. From the menu that appears, choose Draw Text Box.
2. Click where you want one corner of the text box to appear and drag to where you want the opposite corner.
3. Release the mouse button and then type your text.

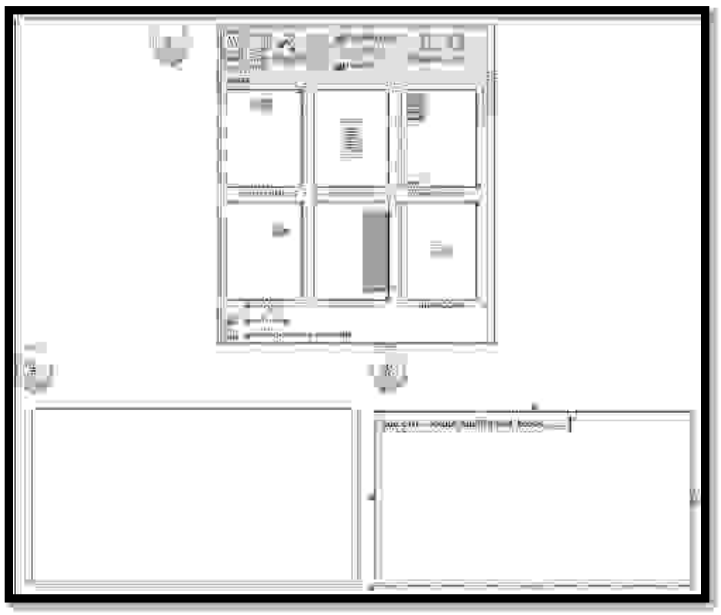


Figure 179: Adding Text Box

Quick parts

Quick Parts are a new feature in Word 2007 that allows you to save text or graphics in what Microsoft calls "Building Blocks" and then call it up quickly when you need it. This is especially handy for inserting information such as a Company Name, Logo, Company Address or any other information that you use often.

Exercise: How to Create a Quick Part

1. Select the text you want to reuse. To include paragraph formatting, make sure you select the ending paragraph mark.
2. Click the Insert tab on the Ribbon.
3. Click the Quick Parts button and click Save Selection to Quick Part Gallery.
4. Enter in the desired properties for the Quick Part.
5. To insert a Quick Part that you have saved, click the Quick Parts button and choose the Quick Part you want to use.

Word Art

WordArt can be used to produce special text effects in a Microsoft Word document. For example, you can create curved, slanted, or three-dimensional text by inserting a WordArt object.

Copyright Virtual University of Pakistan

Exercise: How to add Word Art

1. On the Insert tab and then Click WordArt.
2. In the WordArt Gallery dialog box, double-click the style that you want (Figure 180).
3. In the Edit WordArt Text dialog box, type your text and select font and size.
4. Click Bold or Italic to make all the text bold or italic. (Note you cannot apply bold or italic to only a part of the text.).

5. In the Edit WordArt Text dialog box, click OK. To insert into the document.

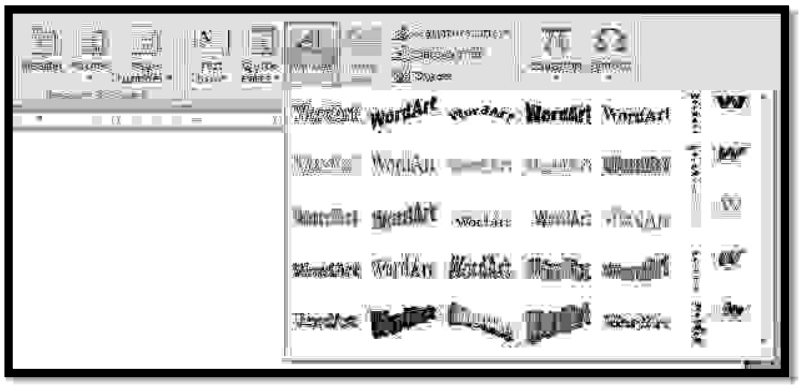


Figure 180: Word Art Gallery

Copyright Virtual University of Pakistan

Module 203

203. Word Processing: MS Word (Text Group (Part-II) and Symbols Group)

Drop Cap

A drop cap is a specially formatted letter that appears at the beginning of a paragraph just like you see in newspapers or in books. Microsoft word offers drop caps in two styles. Most commonly used drop cap begins the paragraph with a large letter that spills down into the text. Thus, the drop cap shifts the first few lines of the paragraph.

Exercise: How to Use Drop Cap

1. Type the paragraph as you normally would.
2. Open the Insert tab on the Ribbon and click the Drop Cap button.(Figure 181)
3. Choose the drop cap style you want to use.
4. Adjust the drop cap, if you want to.

Symbols

Another feature found is Microsoft Word is Symbols. You can add pre-made mathematical Equations and various Symbols where required in your document. However, if you cannot find what you want, you can also create your own equations.

Exercise: Using Symbols

1. Locate the Equation button in the Symbols group of the Insert tab on the Ribbon.
2. Click the button (not its menu triangle), and two things happen. First, an equation control is inserted into your document at the insertion pointer's location. Second, the Equation Tools Design tab appears on the Ribbon.

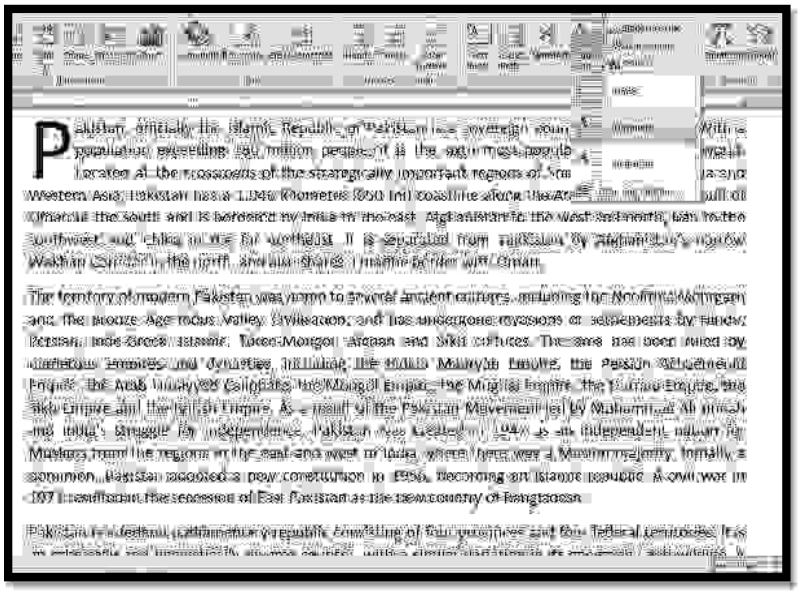


Figure 181: Drop cap 'P'

Copyright Virtual University of Pakistan

Module 204

204. Word Processing: MS Word (Design Ribbon)

Design ribbon (as shown in the Figure 182) contains the following groups:

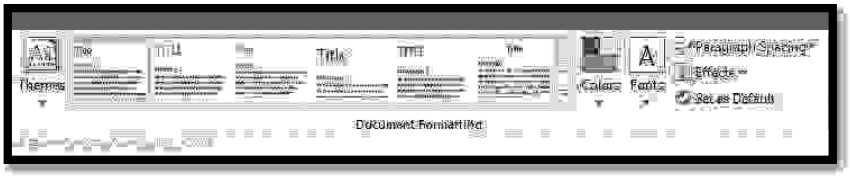


Figure 182: Design Ribbon

Themes - Drop-Down. The drop-down contains the commands: Built-in, More Themes on Microsoft Office Online, Browse for Themes and Save Current Theme. The built-in themes are: Office, Apex, Aspect, Civic, Concourse, Equity, Flow, Foundry, Median, Metro, Module, Opulent, Oriel, Origin, Paper, Solstice, Technic, Trek, Urban and Verve. Tooltip indicates the current theme. The default theme is "Office". Tooltip indicates the current theme. Quick Access to more themes saved down on Microsoft Office Online. Default theme is "Office". Changes the overall design of the entire document including colors, fonts and effects. This drop-down has an additional command not found in Excel or PowerPoint which is "Reset to Theme from Template".
Style Set - Change the look of your document by choosing a new style set. Style sets change the font and paragraph properties of your entire document.

Colors - Drop-Down. Displays a list of all the available colors and lets you change the color component of the active theme.
Fonts - Drop-Down. Displays a list of all the available fonts and lets you change the font component of the active theme.
Paragraph Spacing - Drop-Down. Quickly change the line and paragraph spacing in your document. The drop-down contains the commands: No Paragraph Space, Compact, Tight, Open, Relaxed, Double, Custom Paragraph Spacing.

Effects - Drop-Down. Displays a list of all the available effects and lets you change the effect component of the active theme. The drop-down contains the commands: Office, Apex, Aspect, Civic, Concourse, Equity, Flow, Foundry, Median, Metro, Module, Opulent, Oriel, Origin, Paper, Solstice, Technic, Trek, Urban and Verve.
Set As Default - Use the current look for all new documents.

Page Background – This tab contains watermark, page color and page borders as shown in the Figure 183.



Figure 183: Page background group

Page Color – Drop-Down. Let's you change the background color of the page. Displays the full theme color palette.

Copyright Virtual University of Pakistan

Page Borders – Displays the "Border and Shading" dialog box.

Watermarks

Watermarks in the documents can be attractive, but they aren't just about looks: A watermark can be a way of letting the reader know that the document is confidential.

Exercise: How to add Watermark

1. Click the Watermark button on the Page Layout tab.
2. Click one of the watermarks to insert it or select Custom Watermark from the bottom of the gallery.
3. To select text for your custom watermark, select the Text Watermark option in the Printed Watermark dialog box. Then use the controls to select the language and the text to be used. Click OK.

You can also select a picture to be used for the watermark by selecting the Picture Watermark option and then using the Select Picture button to find the image you want to use. For most images, you want to leave the Washout option selected, which makes the text on top of the image easier to read.

Copyright Virtual University of Pakistan

Module 205

205. Word Processing: MS Word (Page Setup Group in Page Layout Ribbon)

Using page setup group (Figure 184), you can easily place margins, display text in two or three columns, Add section break or even set page setup.



Figure 184: Page setup group

Displaying Text in two Columns

As you might have observed in newspapers text is displayed in two or three columns. Microsoft Word provides this feature in Page Layout Ribbon tab. By default the text is displayed in one column format. Here's how you can display in two columns.

Exercise: How to add Columns

1. Select text that you want to display in column form. (Figure 185)

In Page Layout Tab click on Columns and select "Two". See Figure 186.

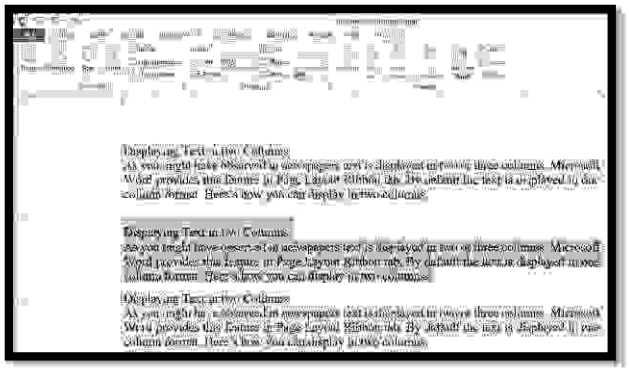


Figure 185: Text selections for 2-columns display

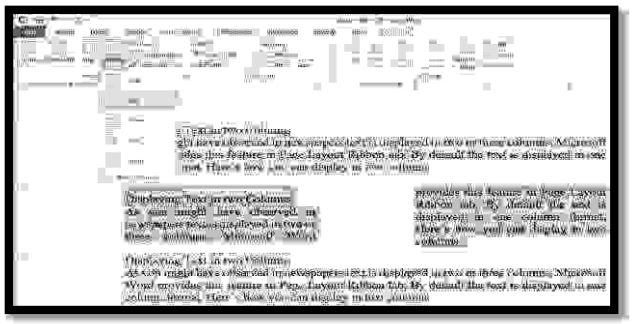


Figure 186: Text in two columns

Copyright Virtual University of Pakistan

Module 206

206. Word Processing: MS Word (Page Setup Group in Page Layout Ribbon)

You can quickly display the "Paragraph" dialog box, Indents and Spacing tab, by clicking on the launcher in the bottom right corner of this group. These are options taken from the (Format Paragraph)(Indents and Spacing tab) for quick access.

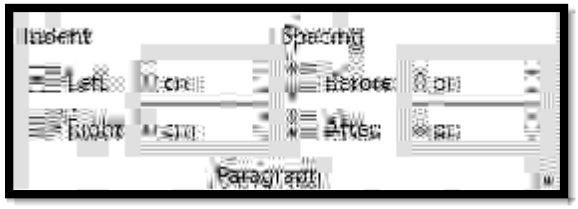


Figure 187: Paragraph group in page layout

Indent Left - TextBox. This automatically updates to indicate how much indentation has been applied to the paragraph of the current selection. This can be used to change the left indentation for the current selection.

Indent Right - TextBox. This automatically updates to indicate how much indentation has been applied to the paragraph of the current selection. This can be used to change the right indentation for the current selection.

Spacing Before - TextBox. This automatically updates to indicate how much spacing is defined before the paragraph of the current selection. This can be used to change the spacing for the current selection. **Spacing After** - TextBox. The automatically updates to indicate how much spacing is defined after the paragraph of the current selection. This can be used to change the spacing for the current selection.

Copyright Virtual University of Pakistan

Module 207

207. Word Processing: MS Word (Arrange Group in Page Layout Ribbon)

This group also appears on the Drawing Tools - Format contextual tab as shown in the Figure 188.



Figure 188: Arrange Group

Position - Drop-Down. Displays a list of picture positioning options. The drop-down contains the commands: In Line with Text and Text Wrapping. You can select More Layout Options to display the "Advanced Layout" dialog box.

Wrap Text – Drop-Down. The drop-down contains the commands: In Line with Text, Square, Tight, Through, Top and Bottom, Behind Text, In Front of Text, Edit Wrap Points and More Layout Options.

Bring Forward - Button with Drop-Down. The button brings the selected object forward one level. The drop-down provides a command to bring the selected object in front of all the other objects. **Send Backward** - (Send to Back in 2007). Button with Drop-Down. The button brings the selected object back one level. The drop-down provides a command to send the selected object to the back of all the other objects.

Selection Pane - (Added in 2010). Displays the Selection Pane task pane.

Align - Drop-Down. The drop-down contains the commands: Align Left, Align Center, Align Right, Align Top, Align Middle, Align Bottom, Distribute Horizontally, Distribute Vertically, Align to Page, Align to Margin, Align Selected Objects, View Gridlines and Grid Settings. The Grid Settings displays the "Drawing Grid" dialog box.

Group - Drop-Down. The drop-down contains the commands: Group, Regroup and Ungroup.

Rotate - Drop-Down. The drop-down contains the commands: Rotate Right 90, Rotate Left 90, Flip Vertical, Flip Horizontal and More Rotation Options.

Copyright Virtual University of Pakistan

Module 208

208. Word Processing: MS Word (References Ribbon)

This tab gives you access to all the commands for creating references within your documents.

Table of Contents - Drop-Down. Provide an overview of your document by adding a table of contents. The drop-down contains the commands: Built-in, Insert Table of Contents and Save Selection to Table of Contents Gallery as shown in the Figure189.



Figure 189: Table of Content

Add Text - Drop-Down. The drop-down contains the commands: Do Not Show in Table of Contents, Level 1, Level 2 and Level 3.
Update Table - Updates the table of contents so that all the entries refer to the correct page numbers.

Footnotes - You can quickly display the "Footnote and Endnote" dialog box by clicking on the dialog box launcher in the bottom right corner of this group as shown in the Figure 190.



Figure 190: Footnotes Group

Insert Footnote - (Alt + Ctrl + F). Inserts a footnote at the current position. Footnotes are automatically renumbered as you move text around the document.

Insert Endnote - (Alt + Ctrl + D). Inserts an endnote at the end of the document. End notes are always placed at the end of a document.
Next Footnote - Button with Drop-Down. The button moves to the next footnote. The drop-down provides the commands Next Footnote, Previous Footnote, Next Endnote and Previous Endnote.
Show Notes - Shows where footnotes and endnotes are located.

Copyright Virtual University of Pakistan

Module 209

209. Word Processing: MS Word (Proofing Group in Review Ribbon)

The proofing group is shown in the Figure 191.



Figure 191: Proofing group

Spelling & Grammar - Displays the "Spelling and Grammar" dialog box. This allows you to check the spelling and grammar in the active document.

Thesaurus - Toggles the display of the Research task pane defaulting the research service to the thesaurus. Same as Excel.

Word Count - This displays the "Word Count" dialog box displaying the document statistics. This replaces the Word Count toolbar. This dialog box can also be displayed by clicking on the word count indicator on the status bar.

Copyright Virtual University of Pakistan

Module 210

210. Word Processing: MS Word (Language Group in Review Ribbon)

The language group has been shown in the Figure 192.



Figure 192: Language group

Translate - Drop-Down. Displays the Research task pane. This drop-down contains the commands: Translate Document, Translate Selected Text, Mini Translator and Choose Translation Language. **Language** - Drop-Down. This drop-down contains the commands: Set Proofing Language and Language Preferences. Set Proofing Language display the "Language" dialog box. Language Preferences displays the "Options" dialog box, Language Tab.

Copyright Virtual University of Pakistan

Module 211

211. Word Processing: MS Word (Comments Group in Review Ribbon)

The comments group has been shown in the Figure 193.



Figure 193: Comments group

New Comment - (Shift + F2). Inserts a comment at the active cell. This command does not change to Edit Comment when a comment is selected like it does in Excel.

Delete - Button with Drop-Down. Deletes the selected comment. The button deletes the comment in the active selection. The drop-down contains the commands: Delete All Comments Shown and Delete all comments in Document. This is disabled when the document does not contain any comments.

Previous - Goes to the previous comment in the active document. This is disabled when the document does not contain any comments.

Next - Goes to the next comment in the active document. This is disabled when the document does not contain any comments.

Copyright Virtual University of Pakistan

Module 212

212. Word Processing: MS Word (Tracking and Changes Groups in Review Ribbon)

The Tracking group has been shown in the Figure 194.



Figure 194: Tracking group

Track Changes - (Ctrl + Shift + E). Button with Drop-Down. The button is the Track Changes command from the Reviewing. It contains the commands Track Changes, Change Tracking Options and Change Username. Change Tracking Options displays the Track Changes Options dialog box. Change Username displays the Word Options dialog box (Popular tab).

Show Markup - Drop-Down. The drop-down contains the commands: Comments, Ink, Insertions and Deletions, Formatting, Markup Area Highlight.

Reviewing Pane - Button with Drop-Down. The button toggles the display of the Reviewing pane. The drop-down contains the commands: Reviewing Pane Vertical and Reviewing Pane Horizontally. There is now also summary information at the top of the pane.

The changes group is shown in the Figure 195.




Figure 195: Changes group

Accept - Button with Drop-Down. The button is the Accept and Move to Next command which accepts the current change and moves to the next proposed change. The drop-down contains the commands: Accept and Move to Next, Accept Change, accept all Changes Shown and Accept all Changes in Document. This drop-down is disabled when the document is protected.

Reject - Button with Drop-Down. The button is the Reject and Move to Next command which rejects the current change and moves to the next proposed change. The drop-down contains the commands: Reject and Move to Next, Reject Change, reject all Changes Shown and Reject all Changes in Document. This drop-down is disabled when the document is protected.

Previous - Moves to the previous revision in the active document. This is a bit confusing as it does exactly the same as the Previous in the comments group.

Next - Moves to the next revision in the active document.

Copyright Virtual University of Pakistan

Module 213

213. Word Processing: MS Word (Compare and Protect Groups in Review Ribbon)

The Compare group is shown in the Figure 196.



Figure 196: Compare group

Compare - Drop-Down. The drop-down contains the commands: Compare and Combine. The Compare command lets you compare two versions of the same document and displays the "Compare Documents" dialog box. The Combine command lets you combine revisions from multiple authors and displays the "Combine Documents" dialog box. This drop-down is disabled when the document is protected.

The protect group is shown in the Figure 197.

Block Authors - Drop-Down. Prevent others from making changes to the selected text.

Restrict Editing - Toggles the display of the Restrict Editing task pane.
Protect Document - The drop-down contains the commands: Unrestricted Access, Restricted Access, Manage Credentials.



Figure 197: Protect group

Copyright Virtual University of Pakistan

Module 214

214. Word Processing: MS Word (View Ribbon)

The View ribbon contains Views group, Show Group, Zoom Group, and Windows group. The Views group contains all the commands relating to the different ways you can view your documents as shown in the Figure 198.



Figure 198: Views group

Read Mode – It maximizes the Word window on the screen and removes all toolbars etc to allow easy reading.

Print Layout - Displays the document as it would appear if printed and is the default view.

Web Layout - Displays the document as it would appear as a web page.

Outline - Displays the document as an outline is displays the Outlining contextual tab.

Draft - Displays the document in draft mode allowing for quick editing. When using this view certain aspects of the document are not visible, for example any headers or footers.

The show group is shown in the Figure 199.



Figure 199: Show group

Ruler - Toggles the display of the ruler(s).

Gridlines - Toggles the display of gridlines.

Navigation Pane - Toggles the display of the Navigation task pane. This is a combination of the Find, Document Map and Thumbnails.

The Zoom group is shown in the Figure 200.



Figure 200: Zoom group

Copyright Virtual University of Pakistan

Zoom - Displays the "Zoom" dialog box. This can also be accessed from the status bar by clicking on the view percentage.

100% - Adjusts the zoom to 100% of its normal size. Lets you quickly return to 100%.

One Page - Adjust the zoom so an entire page fits in the application window.

Two Pages - Adjust the zoom so two entire pages fit in the application window.

Page Width - Adjust the zoom so the width of the page is the same as the width of the application window.

The Windows group has been shown in the Figure 201. Every document you open in Word can be thought of as a window. It is possible to open multiple windows of the same document.



Figure 201: Windows group

New Window - Lets you create a new window of the active document. **Arrange All** - Tile all the open windows side by side on the screen. This will also maximize the application / document to a full screen.

Split - Splits the current window into two parts.

View Side by Side - Displays two documents side by side so they can be easily compared. If you have more than two documents open the "Compare Side by Side" dialog box is displayed so you can choose which document to display next to the active document, allowing you to scroll multiple windows at the same time.

Synchronous Scrolling - Toggles the synchronize scrolling of the two documents that are displayed side by side. This is only enabled when you are viewing two documents side by side.

Reset Window Position - Resets the windows positions so they take up the same amount of space on the screen when two documents are displayed side by side. This is only enabled when you are viewing two documents side by side.

Switch Windows - Drop-Down. Lets you switch between all the currently active documents. This displays all the window/documents that are currently open in the particular session.

Copyright Virtual University of Pakistan

Module 215

215. Presentations: MS-PowerPoint (Introduction)

Microsoft offers another powerful tool known as MS-PowerPoint. This is used to develop presentations. Microsoft PowerPoint is an easy program to use and a powerful tool for giving a presentation. Whether your presentation needs a visual kick, tools for collaboration, easy access or the ability to share information beyond the initial meeting, PowerPoint is a good option. It can even help reduce speaking anxiety by drawing eyes away from the speaker and towards a screen. Just do not expect this technology to substitute for sound and dynamic speaking skills. All ribbons of MS Powerpoint are shown in the Figure 202.

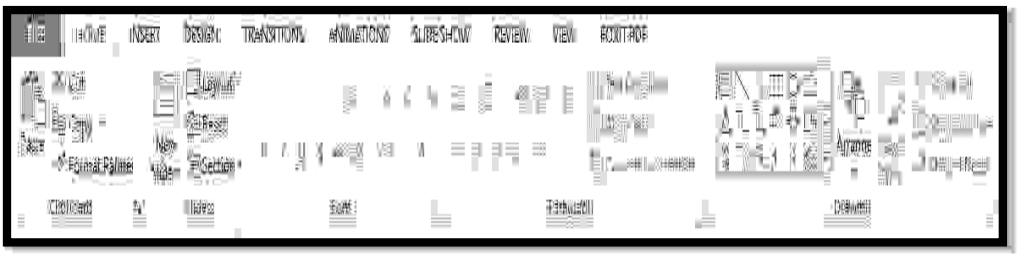


Figure 202: MS: Powerpoint

Some of the functions in different groups in Powerpoint are exactly same as per the functions in MS: Word. We will only cover those groups and functions which are new in the MS: Powerpoint as compared to the MS: Word. These groups and their functionalities will be discussed in the next modules.

Copyright Virtual University of Pakistan

Module 216

216. Presentations: MS-PowerPoint (Slides Group on Home Ribbon)

The Slides group is shown in the Figure 203.



Figure 203: Slides group in home ribbon

New Slide - Button with Drop-Down. The button inserts a new blank Title and Content Slide. The drop-down contains the slides: Title Slide, Title and Content, Duplicate Selected Slides, Slides from Outline and Reuse Slides.

Layout - Drop-Down. The drop-down contains the commands: Title Slide and Title and Content.

Reset - Reset the position, size and formatting of the slide placeholders to their default settings.

Delete - Removes the slides currently selected.

Module 217

217. Presentations: MS-PowerPoint (Design Ribbon)

The design ribbon is the ribbon that helps you to design your slides as per your requirement. The first group is called the: "Themes" as shown in the Figure 204. This helps to choose the required theme of your presentation. You can try different themes to see the difference.

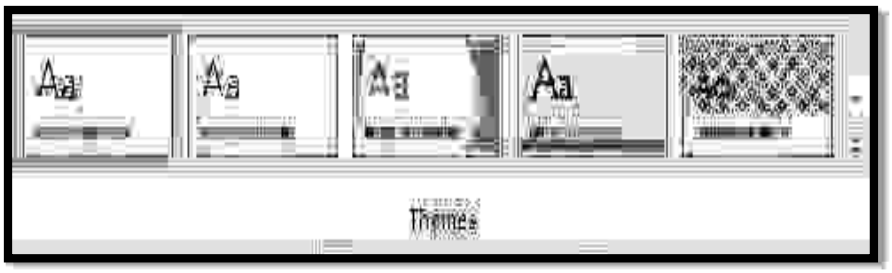


Figure 204: Themes group

Furhermore, you can select slide size in the next group and format background according to your requirements.

Copyright Virtual University of Pakistan

Module 218

218. Presentations: MS-PowerPoint (Transition Ribbon)

If you've ever seen a PowerPoint presentation that had special effects between each slide, you've seen **slide transitions**. A transition can be as simple as fading to the next slide or as flashy as an eye-catching effect. PowerPoint makes it easy to apply transitions to some or all of your slides, giving your presentation a polished, professional look. The transition ribbon has "Transition to this slide" group as shown in the Figure 205.



Figure 205: Transition group

Once you are done with one typical transition style, the next thing is to configure other options available in the Figure 206.

Sound – You can add any sound file over here which you need to play in this transition
Duration – you can set the duration of the transition.
Apply to All - Set the transition between all the slides in the presentation to be the same as this slide.
On Mouse Click - Lets you wait until there is a mouse click before moving on to the next slide.



Figure 206: Transition timing group

Copyright Virtual University of Pakistan

Module 219

219. Presentations: MS-PowerPoint (Animation Ribbon)

Transition discussed in the last module were the animations added in between slides. Whereas, If you want to animate text, an image, shape, graph or chart within the slide, this is the type of animation you select.

There are variety of animations available as shown in the Figure 207.



Figure 207: Animations group

Copyright Virtual University of Pakistan

Module 220

220. Spreadsheets: MS Excel (Introduction)

What is a Spreadsheet?

Suppose you would like to maintain personal finance register also known as check register that will keep track of the expenditures that you have been making during the current semester. Another scenario can be the budget management of a small house. You may be interested in question such as how much money has been spent on electricity bills and telephone bills. How much saving has been made? You may imagine a book that keeps record of all transaction/ expenditures and income. Such a book can be called a manual or paper spreadsheet. A sample is shown in the Figure 208. In this case you may have to save data that can be numerical or alphanumeric (involving letters or numbers).

Spreadsheet is a tool that is used to organize data, such as a check register. Spreadsheets have been used for many, many years in business to keep track of expenses and other calculations.

Electronic Spreadsheet: Microsoft Excel is an example of spreadsheet application program that can be used for storing, organizing and manipulating data. The key benefit to using a spreadsheet program is that you can make changes easily, including correcting spelling or values, adding, deleting and formatting. It consists of a grid made from columns and rows similar to what you have seen in your Mathematics notebooks in school days. This grid environment makes number manipulation very easy.

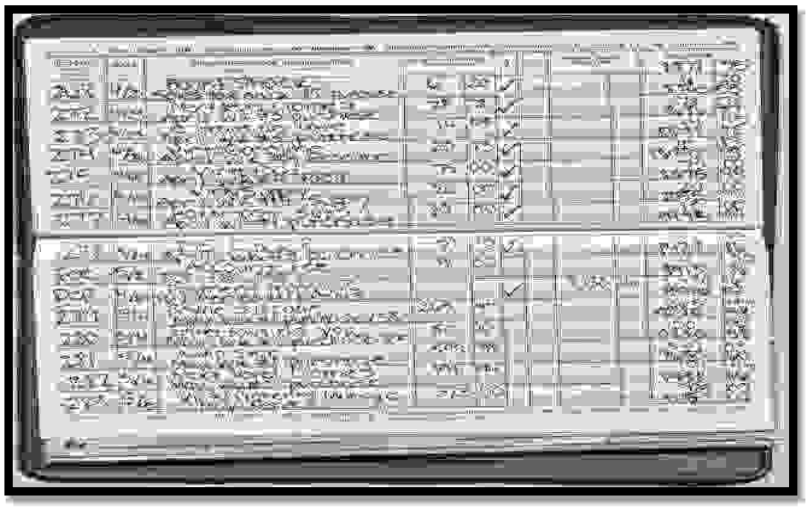


Figure 208: Spread Sheet Example

Please refer to Figure 209 to observe the layout of MS Excel. On the top you will find a ribbon similar to MS Word and PowerPoint that we will be discussing shortly. The different thing you will notice is the rectangular boxes on the screen divided with the help of rows and columns

Rows are identified by Numbers as shown in the leftmost columns whereas Columns are identified by Alphabets as shown in the topmost row.

If you want to select a particular cell, you will have to identify its address. The selected cell in the Figure 209. For. e.g. is A1, A being the first column and 1 being the first row

Copyright Virtual University of Pakistan

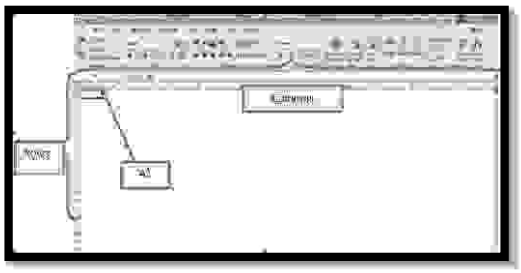


Figure 209: Excel Layout

Cell Formatting

The cell formatting is show in the Figure 2010. You can adjust the row height by clicking "Auto fit row height". This will adjust the height of all the cells in a row according to the font size of the data you have inserted.

Charts

Charts allow you to present information contained in the worksheet in a graphic format. Excel offers many types of charts including: Column, Line, Pie, Bar, Area, Scatter and more. To view the charts available click the Insert Tab on the Ribbon.

Creating a Chart:

- ✓ Select the cells that contain the data you want to use in the chart. In our example we can select the shipping cost column to be used as chart data.

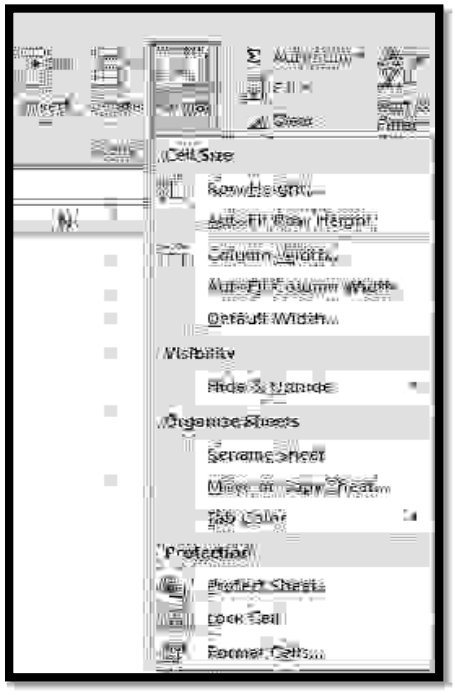


Figure 210: Cell formatting

Copyright Virtual University of Pakistan

- ✓ Click the Insert tab on the Ribbon
- ✓ Click the type of Chart you want to create. There are different chart types as show in the Figure 211.



Figure 211: Charts group

- ✓ Click the Column chart button and then select the 2d chart
- ✓ A bar chart will appear showing the shipping cost as chart as shown in Figure 212.
- ✓ You can observe the costs at the Y-axis and as there are four items so you can see 4 bars at X-axis
- ✓ This chart has four components and you can right clock on them separately to see the advance options available.




Figure 212: Chart example in Excel

Module 221

221. Spreadsheets: MS Excel (Functions)

A formula is a set of mathematical instructions that can be used in Excel to perform calculations. Formals are started in the formula box starting with an = sign. A sample formula is shown in Figure 213.

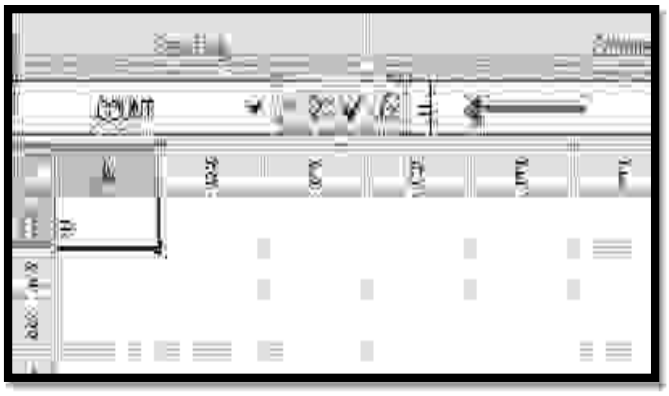


Figure 213: Formula Example

Copyright Virtual University of Pakistan


The formula ribbon is shown in the Figure 214. This ribbon gives you different options for applying formulas. The first section represents Function library. Function library contains different formulas from various categories. Figure 214 gives you an overview of the Formula ribbon.



Figure 214: Formula ribbon

Creating Basic Formula

To create a basic formula in Excel we need the data on which to apply the formula. Data is represented in Figure 215.

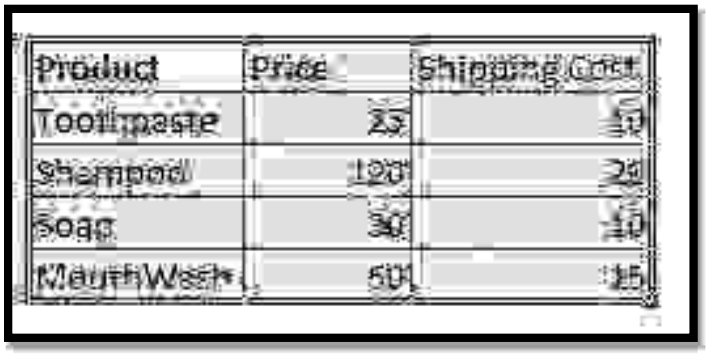

Product	Price	Shipping Cost
Toothpaste	25	10
Shampoo	120	20
Soap	30	10
MouthWash	50	15

Figure 215: Data for Sum Formula

To create a basic formula, you need to do the following:

Select the cell for the formula


Type "=" (the equal sign) and the formula

The formula is of sum which would sum the values.

":" is used to specify the range of the cell on which you want to apply the formula

Click Enter

Creating a basic formula is shown in the Figure 216.

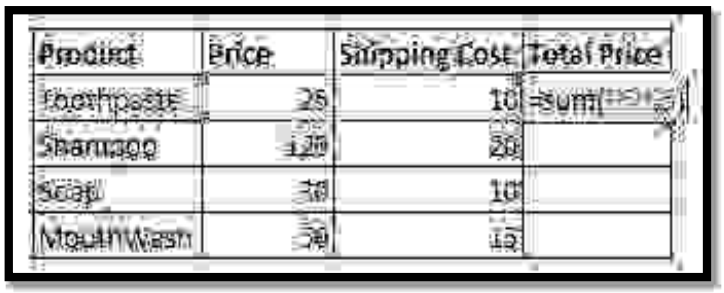


Product	Price	Shipping Cost	Total Price
Toothpaste	25	10	=sum(
Shampoo	120	20	
Soap	30	10	
MouthWash	50	15	

Figure 216: Sum Formula

Copyright Virtual University of Pakistan

When you click enter you would get the result as shown in figure 217 the label 1 represents the formula applied to get the desired result and label 2 represents the result after applying the formula.

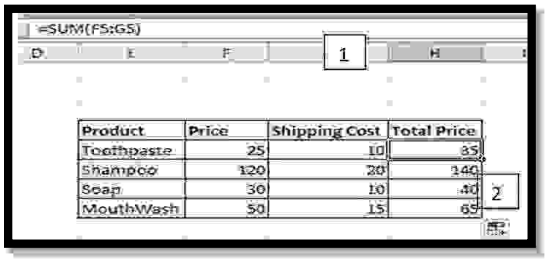

Product	Price	Shipping Cost	Total Price
Toothpaste	25	10	35
Shampoo	120	20	140
Soap	30	10	40
MouthWash	50	15	65

Figure 217: Result of Sum Formula

Calculate with Functions

A function is a built in formula in Excel. A function has a name and arguments (the mathematical function) in parentheses.

- ✓ Sum: Adds all cells in the argument
- ✓ Average: Calculates the average of the cells in the argument
- ✓ Min: Finds the minimum value
- ✓ Max: Finds the maximum value
- ✓ Count: Finds the number of cells that contain a numerical value within a range of the argument

To calculate a function:

- ✓ Click the cell where you want the function applied
- ✓ Click the Insert Function button
- ✓ Choose the function
- ✓ Click OK

The process of calculating through a function is shown in figure 218.

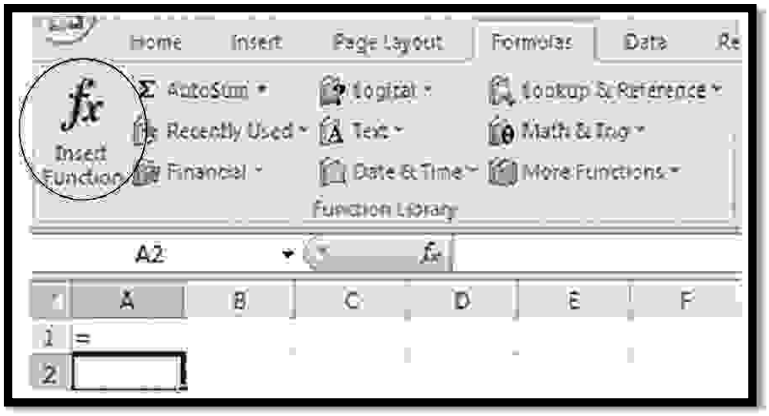


Figure 218: Function Computation

Copyright Virtual University of Pakistan

Module 222

222. Spreadsheets: MS Excel (Application Scenarios-I)

After learning the formulas in details in the last module. Lets apply those in the real scenario.

Consider the Figure 219 which contains the data of five students and their marks in five subjects. We want to add the total marks of each student. The formula has been written for your reference.

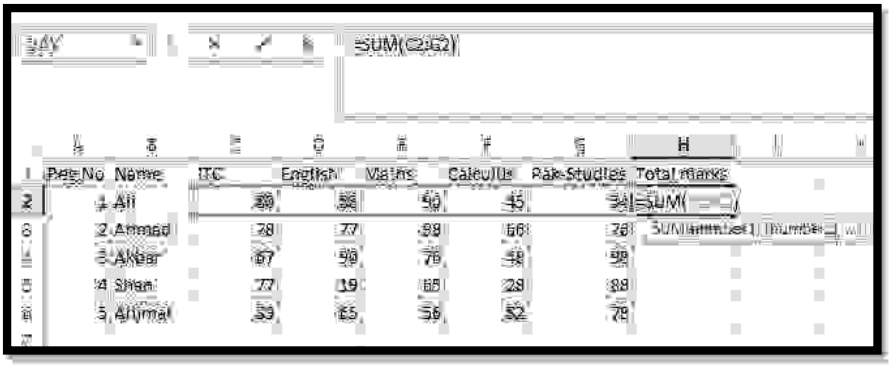


Figure 219: Sum of marks

When this formula is applied and copied in the following cells, the result can be seen in the Figure 220.

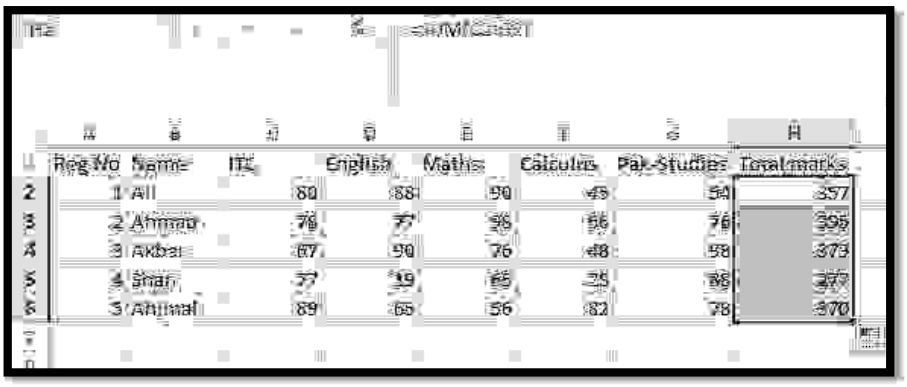


Figure 220: Result of sum formula


Copyright Virtual University of Pakistan

Module 223

223. Spreadsheets: MS Excel (Application Scenarios-II)

Let's apply the learned formulas in another application scenario. Remember, in the module 220, we mentioned a scenario that if you want to manage your personal expenses on a register, its very difficult to perform different queries. In this module, we will consider this scenario and will perform number of queries on this example.

The Figure 221 contains the personal expenses details of the year 2020 month wise in different heads.

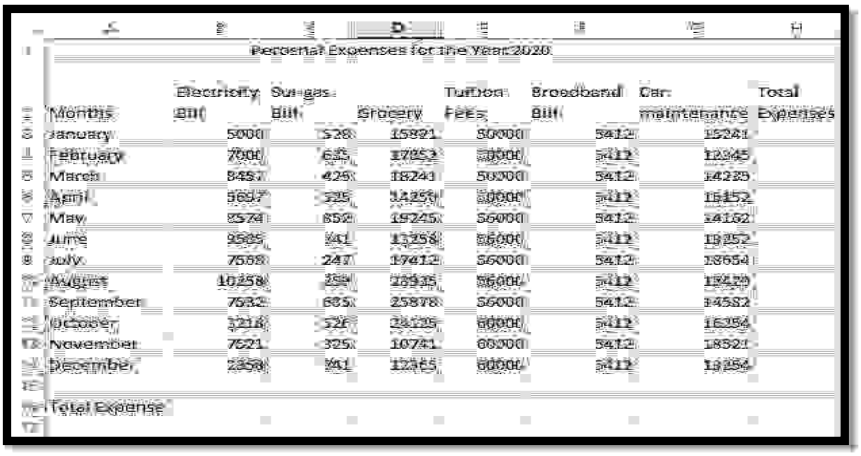


Personal Expenses for the Year 2020

Months	Electricity Bill	Su=gas Bill	Grocery	Tuition Fees	Broadband Bill	Car maintenance	Total Expenses
January	5000	528	15821	50000	5412	15241	
February	7000	635	17852	50000	5412	12345	
March	8457	425	18241	50000	5412	14235	
April	5697	525	14259	50000	5412	15152	
May	8574	852	19245	56000	5412	14162	
June	9585	741	11258	56000	5412	19252	
July	7568	247	17412	56000	5412	18654	
August	10258	258	23435	56000	5412	19429	
September	7582	685	25878	56000	5412	14582	
October	1218	526	24125	60000	5412	16254	
November	7521	325	10741	60000	5412	18521	
December	2358	741	12365	60000	5412	19254	
Total Expense							

Figure 221: Personal expense sheet

Now our first query is to see the total expense for the January month. The applied formula can be seen in the Figure 222 and its result can be seen in the Figure 223.

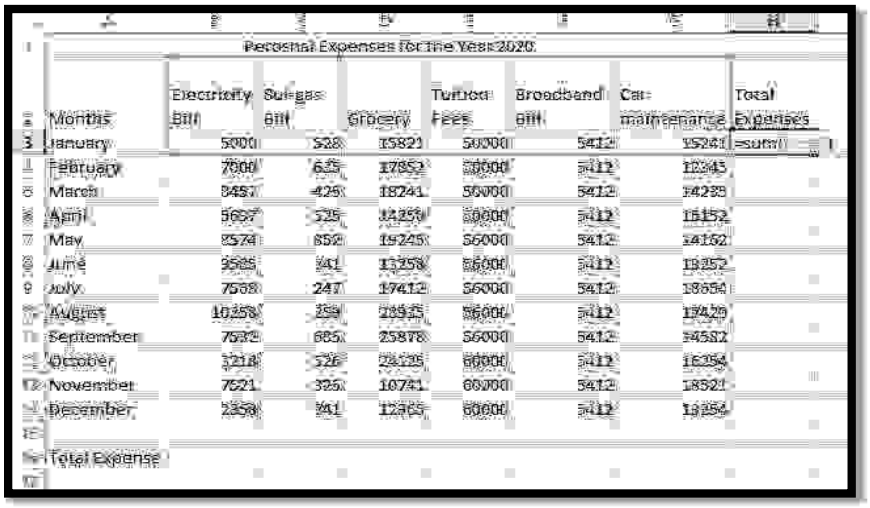


Personal Expenses for the Year 2020

Months	Electricity Bill	Su=gas Bill	Grocery	Tuition Fees	Broadband Bill	Car maintenance	Total Expenses
January	5000	528	15821	50000	5412	15241	=sum()
February	7000	635	17852	50000	5412	12345	
March	8457	425	18241	50000	5412	14235	
April	5697	525	14259	50000	5412	15152	
May	8574	852	19245	56000	5412	14162	
June	9585	741	11258	56000	5412	19252	
July	7568	247	17412	56000	5412	18654	
August	10258	258	23435	56000	5412	19429	
September	7582	685	25878	56000	5412	14582	
October	1218	526	24125	60000	5412	16254	
November	7521	325	10741	60000	5412	18521	
December	2358	741	12365	60000	5412	19254	
Total Expense							

Figure 222: Finding total expense for the January month

Copyright Virtual University of Pakistan

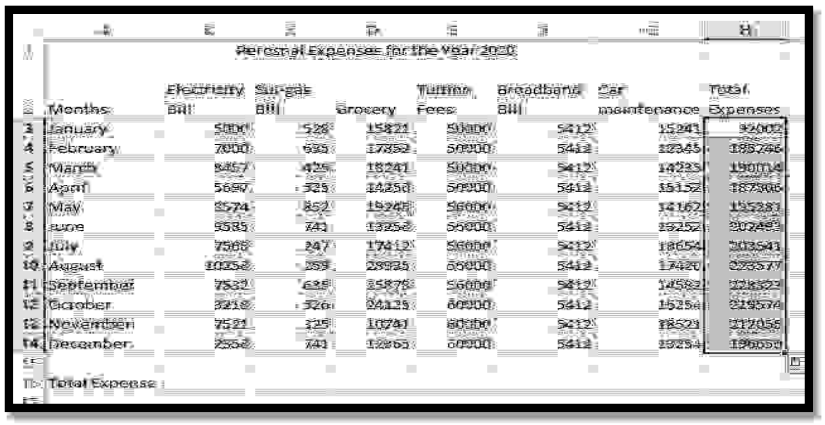


Personal Expenses for the year 2020

Months	Electricity Bill	Sui-gas Bill	Grocery	Tuition Fees	Broadband Bill	Car maintenance	Total Expenses
January	5000	528	15821	50000	5412	15241	92002
February	7000	635	17852	50000	5412	12345	185246
March	8457	425	18241	50000	5412	14235	190014
April	5697	325	14256	50000	5412	15152	187806
May	8574	852	19245	56000	5412	14162	155281
June	9585	741	13258	56000	5412	19252	202463
July	7568	247	17412	56000	5412	18654	203541
August	10258	259	25935	56000	5412	17429	223577
September	7532	685	25878	56000	5412	14582	228323
October	3218	526	24125	60000	5412	16254	219574
November	7521	325	10741	60000	5412	18521	212055
December	2358	741	12365	60000	5412	13254	196630
Total Expense							

Figure 223: Result of query from Figure 222

Now if we are interested to see what the total expense of the Electricity Bill is, we can apply the following formula and can copy it in the next cell to see the result as shown in the Figure 224.

=sum(b3:b14)

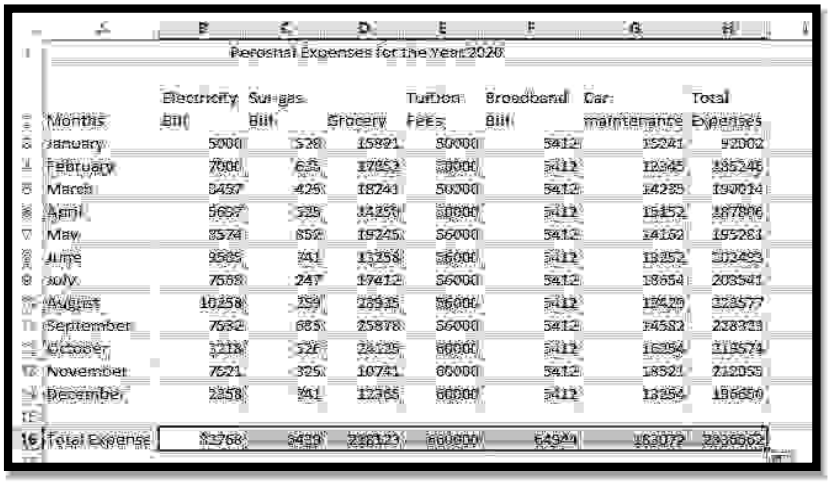

Personal Expenses for the Year 2020

Months	Electricity Bill	Sui-gas Bill	Grocery	Tuition Fees	Broadband Bill	Car maintenance	Total Expenses
January	5000	528	15821	50000	5412	15241	92002
February	7000	635	17852	50000	5412	12345	185246
March	8457	425	18241	50000	5412	14235	190014
April	5697	325	14256	50000	5412	15152	187806
May	8574	852	19245	56000	5412	14162	155281
June	9585	741	13258	56000	5412	19252	202463
July	7568	247	17412	56000	5412	18654	203541
August	10258	259	25935	56000	5412	17429	223577
September	7532	685	25878	56000	5412	14582	228323
October	3218	526	24125	60000	5412	16254	219574
November	7521	325	10741	60000	5412	18521	212055
December	2358	741	12365	60000	5412	13254	196630
Total Expense	81768	6439	251123	660000	64944	182072	2336962

Figure 224: Total bill Expense-head wise

Similarly, you can try the following formulas as well:

=average(b3:b14)

=max(b3:b14)

=min(b3:b14)

The total expense for the year 2020 can be seen after applying the following formula:

=SUM(B16:H16)

Copyright Virtual University of Pakistan

Module 224

224. Spreadsheets: MS Excel (Sorting and Filter)

Sorting and Filtering allow you to manipulate data in a worksheet based on given set of criteria. You can sort the data in ascending and descending order. There are two types of sorts in Microsoft Excel i.e. Basic Sorts and Custom Sorts.

Basic Sort

To execute a basic descending or ascending sort based on one column perform the following steps:

- Highlight the cells that will be sorted
- Click the Sort & Filter button on the Home tab

Click the Sort Ascending (A-Z) button or Sort Descending (Z-A) button.

These steps are shown in the Figure 225.



Figure 225: Sort and Filter

Custom Sort

To sort on the basis of more than one column:

- ✓ Click the Sort & Filter button on the Home tab
- ✓ Choose which column you want to sort by first
- ✓ Click Add Level
- ✓ Choose the next column you want to sort
- ✓ Click OK

This process is represented in the Figure 226.

Copyright Virtual University of Pakistan

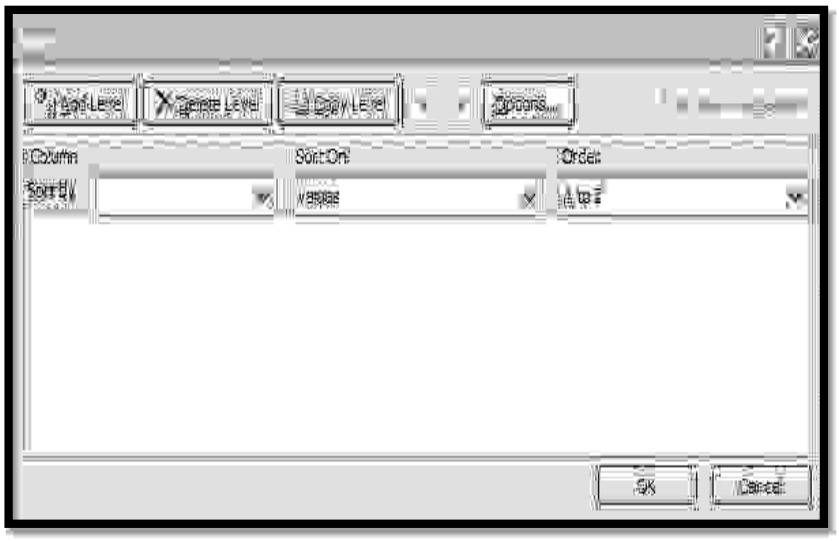


Figure 226: Custom Sort

Copyright Virtual University of Pakistan

Module 225

225. Database: MS Access (Introduction)

Database is collections of files which are also referred as tables. Information is organized in these tables in the form of fields and records for easy access and management purpose.

SQL stands for structured query language. In order to access and retrieve data from the database we use SQL. This is the most commonly used syntax for querying a relational database.

It is important to understand the difference between Database and DBMS. Let's understand this difference with an analogy of office Cleric. Office cleric organize and stores different files in the filing cabinet whenever he needs to access information from the file or add new information in the file he goes to the filling cabinet and retrieve the file which he has already stored in the filling cabinet. After updating the information in the file he stores the file back to the filling cabinet. In the above example Database is the filling cabinet where the information is stored in the form of files. And the analogy of DBMS is the office cleric, whose job is to organize and retrieve files.

You should be quite familiar with the ribbon as presented in the MS Word and MS Excel. The similar ribbon is available in MS Access. The same ribbon is also present in Access with few modifications. There is addition of three new tabs i.e. Create, External data and Database Tools as shown in the Figure 227.

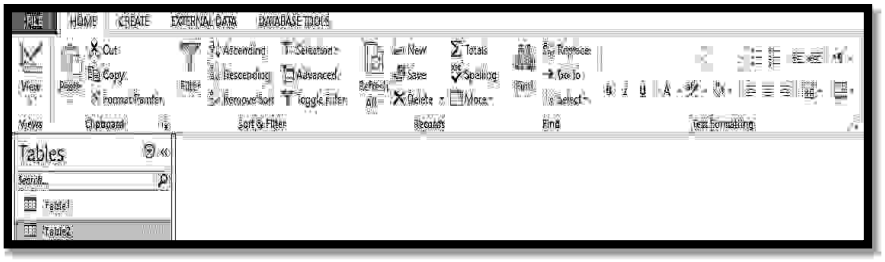


Figure 227: MS Access ribbon

To create a new database

- ✓ Click on Blank database option as shown in Figure 228
- ✓ Type Database name and browse to location where you save the new database.

Click Create button to create database. (Figure 229).



Figure 228: Create Blank Database

Copyright Virtual University of Pakistan

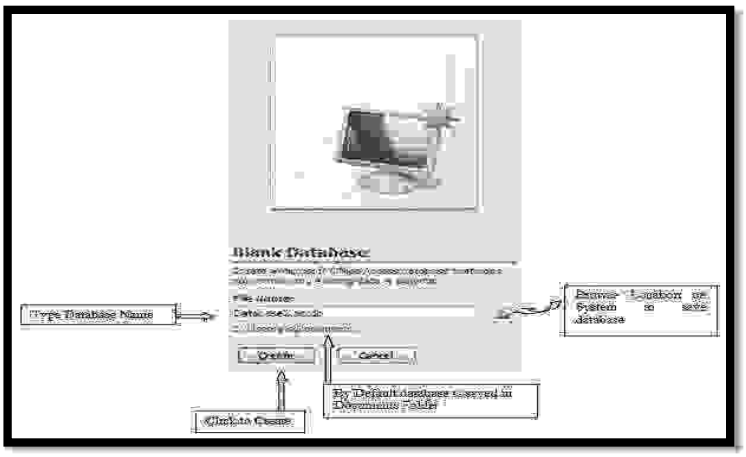


Figure 229: Naming and saving database

Navigation Panel

When your database is created new window screen appear and by default table is added. On the left side of the window is navigation panel (Figure 230) here you will see all your saved tables, forms, queries and reports. On the Right of the navigation pane is working or view panel. You can view table data, query output, generate reports and form here.

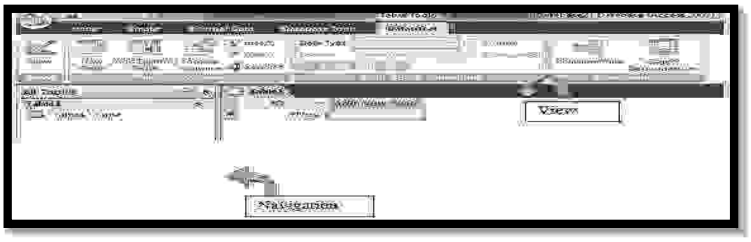


Figure 230: Blank Database

External data

External data tab is used to import, export, collect and share data between different databases. You can also export and import data from excel document as shown in the Figure 231.



Figure 231: External data Ribbon

Copyright Virtual University of Pakistan

Module 226

226. Database: MS Access (Creating and Managing Tables)

Create Tab in the Ribbon helps you to provide quick and easy way to create tables, forms, report and queries as shown in the Figure 232.

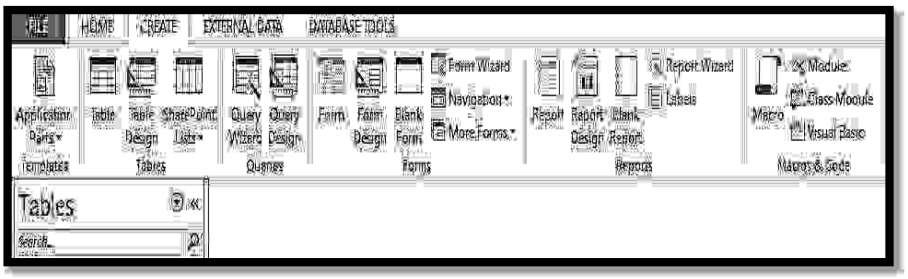


Figure 232: Create tab

Tables Group

Tables in Access are used to store data. It is a set of columns and rows. Each column in table is referred to as a field. Each value in the field signifies a single type of data. Numbers of Record are number of rows in a Table hence each row of a table is referred to as a single record.

Exercise: Create Courses Table

1. Click on Create tab (Figure 232).
2. Click Table in Tables group. A blank table with default Name "Table 1" is created.
3. Click on Design view. A popup dialogue box will appear with a text box with "Table 1".
4. Rename the table name to "courses" and click OK.
5. In Design view click on second row in field name column.
6. Add a new field for course title as "ctitle". Set its data type to "Text".
7. Add another field for section as "csection". Set its data type to number.
8. Add a new field name for course Instructor as "cinstructor". Set its data type to "Text".
9. To return to datasheet view click on view button and select.
10. A Popup dialogue box will appear to save the changes, click yes to continue.
11. In datasheet view your newly added fields are visible.
12. Insert 10 courses data.
13. Close table.

Copyright Virtual University of Pakistan

Module 227

227. Database: MS Access (Creating Forms)

Forms option provides you the ability to enter new record and navigate through existing records easily. You can arrange fields in different layouts add Icon and also apply designs as can be seen in the Figure 232.

Creating Form for Student Table

1. Select student table. Double click to open.
2. Click Create tab.
3. From the Forms group Select Form (Figure 232).
4. A Form will be created with Table Fields as Labels followed by Text Boxes (Figure 233)
5. Use Crtl+ S key to Save or right click on form tab "student" and select save.
6. In the popup dialogue box enter form name "studentForm" and click OK.
7. Your newly created form will show in Navigation Pane.(Figure 234)

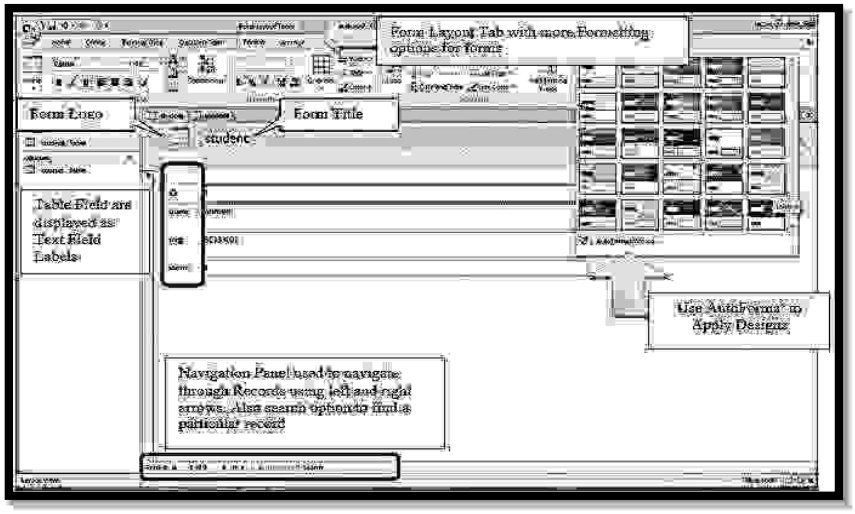


Figure 233: Student Table Form

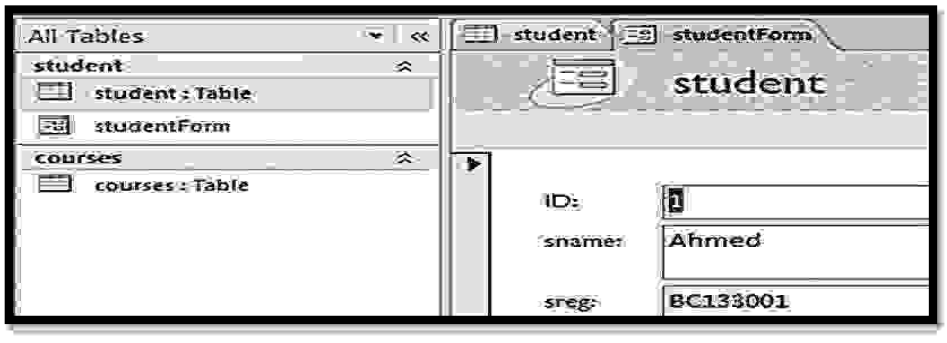


Figure 2334: Saved Form "studentForm"

Copyright Virtual University of Pakistan

Module 228

228. Database: MS Access (Creating Reports)

Reports are organized and summarized form of your data so you can print or view it onscreen. Reports are often use when you want to analyze your data or present it to others. It is available as an independent group of Figure 232.

Creating Report for Student Table

1. Select student table. Double click to open.
2. Click Create tab.
3. From the Reports group select report (Figure 235).
4. A Report will be generated as shown in Figure 236.
5. Use Crtl+ S key to Save or right click on form tab "student" and select save.
6. In the popup dialogue box enter form name "srudentReport" and click OK.
7. In the Navigation Pane you can see your newly created form by the name you have saved.(Figure 236)
8. Rename Report Title to "studentReport".

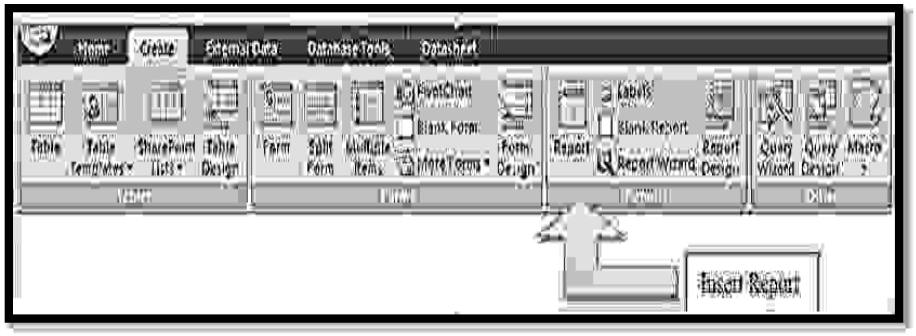


Figure 234: Insert Report

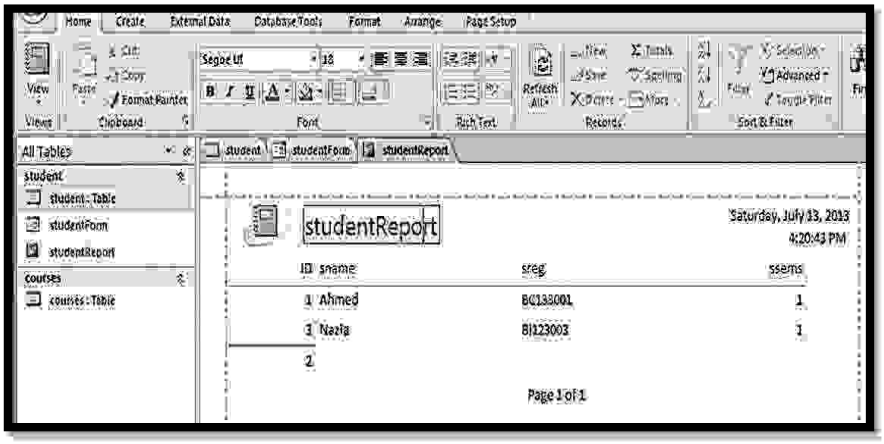


Figure 235: Student Table Report

Copyright Virtual University of Pakistan

Module 229

229. Database: MS Access (Query Wizard)

Queries are to retrieve or fetch specific data from your database. The query wizard group has been shown in the Figure 236.

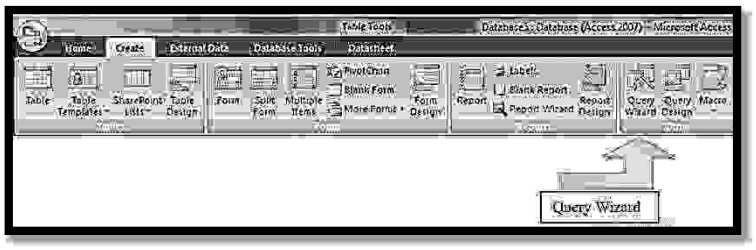


Figure 236: Query Group: Query Wizard

Query Types

There are four basic types of queries used to manipulate the databases. These are briefly described in the Table 1 along with generic syntax.

Table 1: Basic Queries

Query	Description	Generic SQL Syntax
Select	Used to retrieve selected data one or more field can be selected by using comma as seperator or use * to select all table fields, followed by table name from where the data is to be retrieved. You can also add WHERE clause to set criteria for selection.	SELECT field1,field2…,fieldN FROM table_name1,table_name2; OR SELECT * FROM table_name, table_name2; OR SELECT *FROM table_name, table_name2 WHERE some criteria;
Insert	Used to add new records.	INSERT INTO table_name (field1, field2,...fieldN) VALUES
Update	Used to update existing records in database. Given some criteria in WHERE clause.	UPDATE table_name SET field1=newvalue1, field2=newvalue2
Delete	Used to remove data from database.	DELETE FROM table_name WHERE some criteria;

Query Student Table using Wizard

1. Click Create tab. From the Query group select Query Wizard (Figure 236).
2. From popup window select simple query and click OK.

Copyright Virtual University of Pakistan

3. Another window will appear. Select table from which you want to query results in our case it is the student table.
4. Select sname and ssems from the displayed fields as shown in Figure 237
5. When done click next and next again.
6. Before you click finish entering the name you want to give your query. For example, "StudentTBQuery1". Click finish.
7. Your query will be represented in a table form with two selected fields student name and semester.
8. Save query as you saved your report and form (Figure 238).

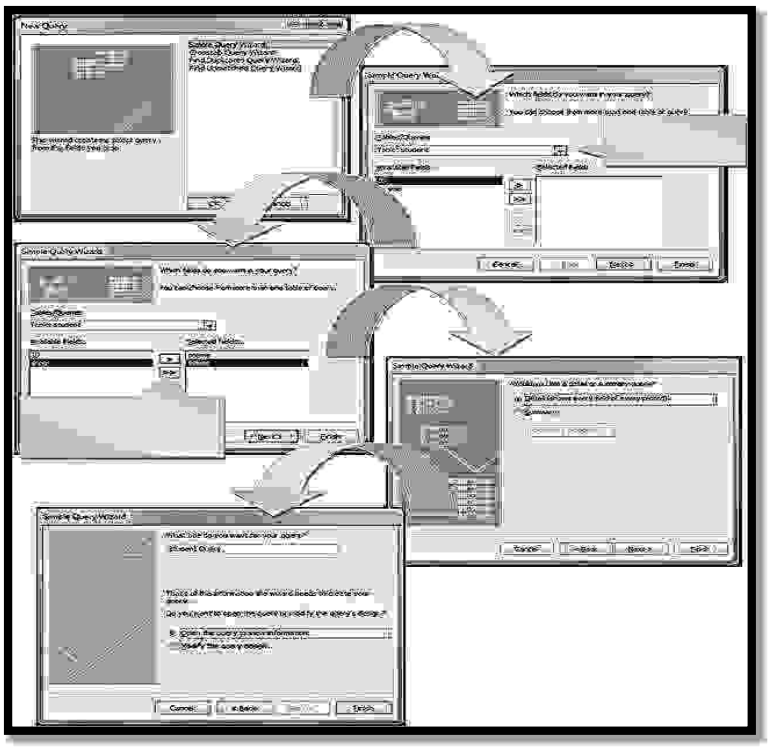


Figure 237: Creating Query using wizard

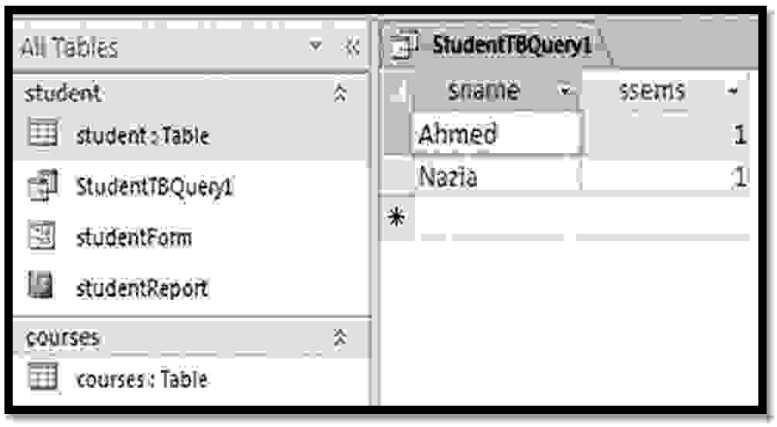


Figure 238: Query Result after saving

Copyright Virtual University of Pakistan

SQL stands for Structured Query Language. This is the most commonly used syntax for querying a relational database. Microsoft Access Provides SQL View feature to view the SQL Syntax of the Query generated. To view the SQL Syntax of your Query right click on query tab and Select SQL View as shown in the Figure 239.

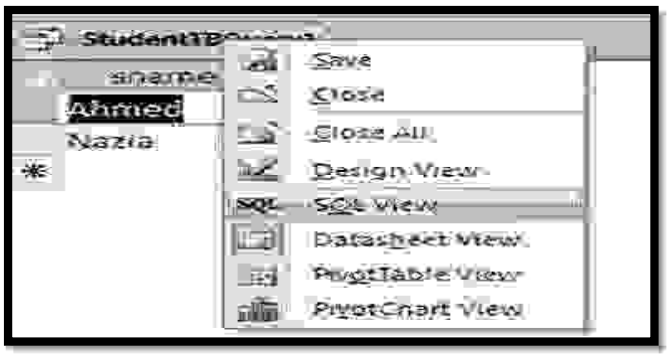


Figure 239: SQL View

Query Design View

Query design view (see Figure 240) can be used to design or create a query with addition of further parameters such as Where Clause, Sort or Order By clause and other useful features.

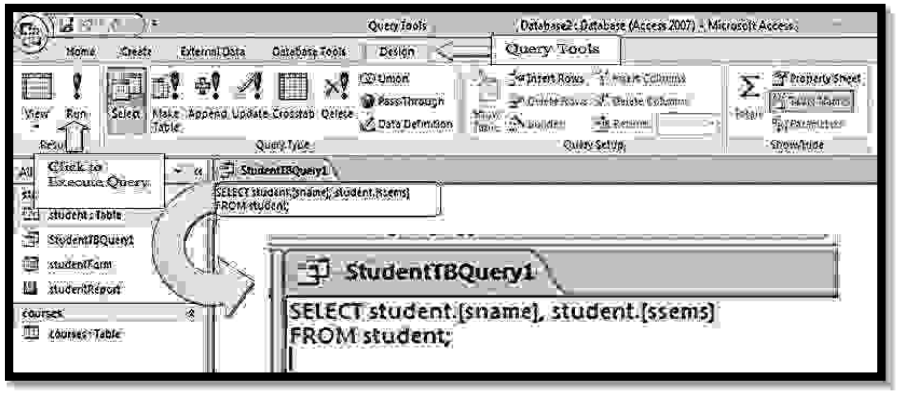


Figure 240: SQL View Query Syntax

Exercise: Query Student Table

1. Click Create tab. From the Query group select Query Design (Figure 241).
2. From popup window select table name.
3. You can add multiple tables to perform query as well for simplicity we will use one table, click Add and then close.
4. Table with is all fields will be shown in a small box.
5. From the options shown at the bottom. Click on text box and from drop down menu select field name “sname” it’s table ”student” in first column.(Figure 242)
6. Select field name “ssems” it’s table ”student” in second column.

Let’s say we want to view records of only those students who are in 3rd semester. Here our criteria is “3rd semester”

Copyright Virtual University of Pakistan

7. In the criteria box of the field ssems type 3.
8. Repeat step 5 to select remaining fields of the table.
9. When happy with the selection click Run on the top left corner of the Query Tools (Figure 240).



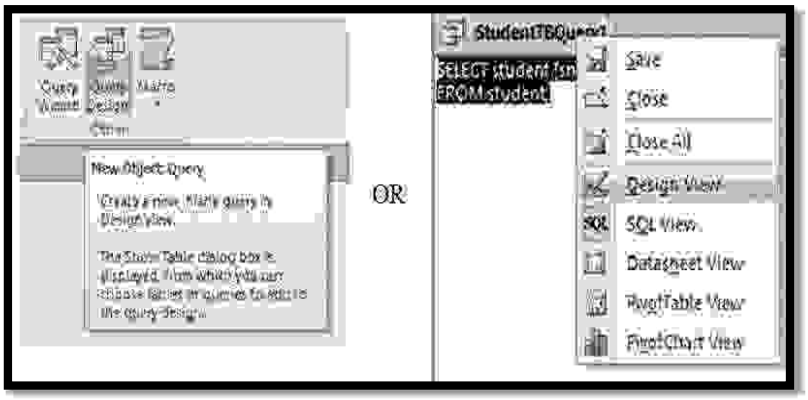


Figure 241: Query Design View

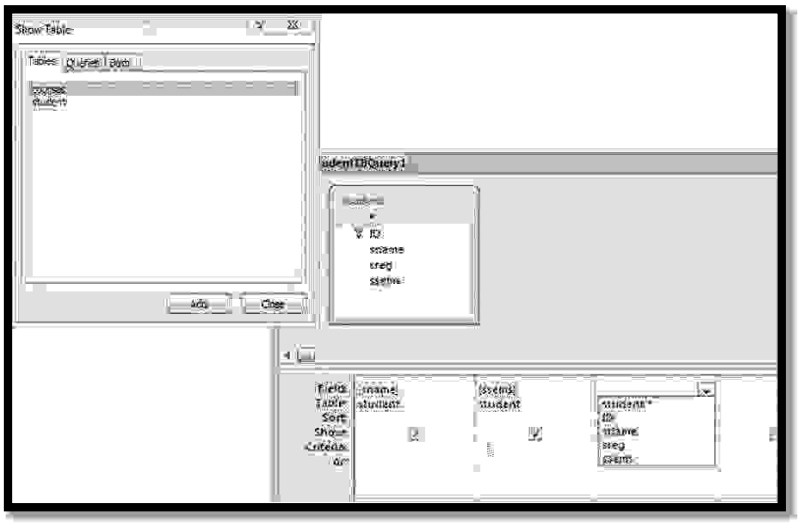


Figure 242: Create Query Using Design View

Copyright Virtual University of Pakistan

Module 230

230. Web page Development (Notepad Editor)

In this module, you will learn what is web page, how it can be developed using notepad editor.

What is a Webpage?

A web page is nothing more than a file, a HTML file to be exact. It's called HTML because web page documents have the file extension **.html** or **.htm.** A web browser displays a web page on a monitor or mobile device. We can use WebPages to display information to a large audience. WebPages provides an opportunity to market your business at a larger scale and let the world know your existence.

HyperText Markup Language is a markup language that web browsers use to interpret and compose text, images and other material into visual or audible web pages. Default characteristics for every item of HTML markup are defined in the browser. The purpose of a web browser is to read HTML documents and compose them into visible or audible web pages. Whenever you open a HTML document in a web browser, the web browser does not display the HTML tags, but uses the tags to interpret the content of the page.

HTML elements form the building blocks of all websites. HTML allows images and objects to be embedded and can be used to create interactive forms. It provides a means to create structured documents by denoting structural semantics for text such as headings, paragraphs, lists, links, quotes and other items. It can embed scripts written in languages such as JavaScript which affect the behavior of HTML web pages.

1.1 HTML Elements:

An HTML element has a starting and ending tag. Content is placed between start and end tag. Elements can have various attributes.

1. The text between tags <html> and </html> describes the start and end of web page.
2. The text between tags <body> and </body> represents the content of the page that is visible to the end user.
3. The text between tags <h1> and </h1> is presented as a first heading.
4. The text between tags and is presented of the page as one paragraph. Each tag has a stating tag and an ending tag. Some exceptions are there which will be discussed later.

An element can have multiple elements in it before end tag.

BLOCK elements always start after a new line and the content is displayed in the next line in browser.

Examples: <h1>, , <ul>, <table>(will be used in coming sections)

Inline elements are usually displayed on the browser without starting a new line. Examples: <b>, <td>, <a>, <img>

HTML Attributes

Elements have attributes that provides additional information about that element. Attributes are certain name that comes in between starting and ending tags.

Example:

<img src="VU logo.jpg" width="100" height="150">

Copyright Virtual University of Pakistan

img is element. src, width and height are attributes for image tag. src defines the location of the element. Width and height represent sizes of the image.

Using Notepad to develop HTML page

1. Open any text editor for example notepad
2. Write the code shown in the Figure 243.



Figure 243: HTML code in Notepad

3. Now save the document as html illustrated in the Figure 244.

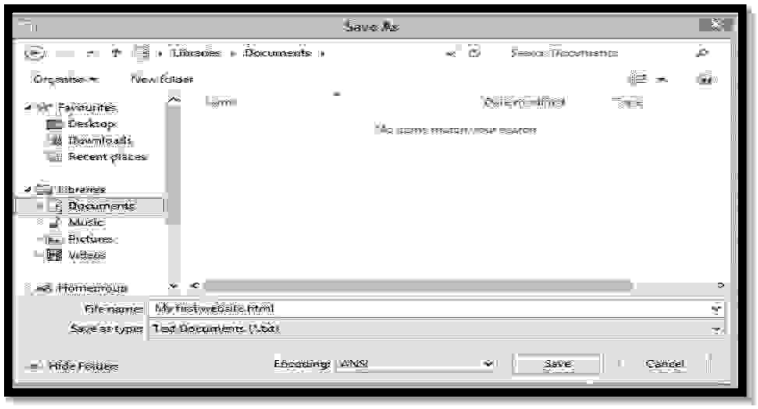


Figure 244: Saving as html page

Double click on that html file and open with any of installed browsers. The icon will appear as shown in the Figure 245.



Figure 245: First web page output

Copyright Virtual University of Pakistan

Module 231

231. Web page Development (Introduction to Dreamweaver)

Although the HTML markup of a web page can be written with any text editor such as Notepad as we have written in the last module. However, when we are making large webpages with many different tags, in that case, the code becomes complex. To cope with such situation, specialized HTML editors are used.

HTML editor is a software application for creating web pages, specialized HTML editors can offer convenience and added functionality. For example, many HTML editors work not only with HTML, but also with related technologies such as CSS (Cascading Style Sheets), XML(Extensible Markup Language) and JavaScript. Anyone who wants to make professional web pages, he has to use these technologies. Almost all pages that you see now a days on the Internet consist of (fully or partially) components that are made from CSS,XML and JavaScript.

In this module we will be introducing a toll known as Adobe Dreamweaver that makes it easier for web page developers to utilize the technologies like CSS and JavaScript. We will not be making complex web pages in this lab however; we will be going through a basic introduction of Adobe Dreamweaver. Although there are several other HTML editing tools available, we have chosen this tool because it is among the most commonly used tool for professional web development.

Adobe Dreamweaver is a web design and development application that provides a visual WYSIWYG editor (What You See Is What You Get) and a code editor with standard features such as syntax highlighting, code completion, and code collapsing as well as more sophisticated features such as real-time syntax checking and code introspection for generating code hints to assist the user in writing code.

Dreamweaver is a powerful application for developing websites and mobile applications. You can save time, work more efficiently, and create compelling designs with the complete set of tools. It is leading software for developing websites and mobile applications. Using its powerful HTML coding environment and standard-setting visual interface, you can create engaging and dynamic websites for a wide range of devices, whatever your level of design or development experience.

The common misconception with Dreamweaver is that Dreamweaver is designed to or is even capable of completely removing the text editors like Notepad for HTML and CSS coding from web design. This is like saying that a machine-made football can completely replace a man-made football A machine made football can make good quantity of footballs in a commercial production however, it cannot achieve the durability and perfection of a man made football. As you may know, man-made footballs from Sialkot are still being used in international tournament s even though we have the choice of machine-made footballs.

Dreamweaver, like the machine that makes football, is designed to make your life easier. You may never learn HTML or CSS, but without knowing them, you are limited to Dreamweaver's way of doing things. This is not altogether a bad thing: it is simply a slightly narrow perspective on a large field. Dreamweaver is not designed to completely remove the utility of HTML and CSS: it is meant to assist you with your HTML and CSS and to make some of the more mundane aspects of Web Publishing less terrible.

Dreamweaver interface has been shown in the Figure 246.

Copyright Virtual University of Pakistan

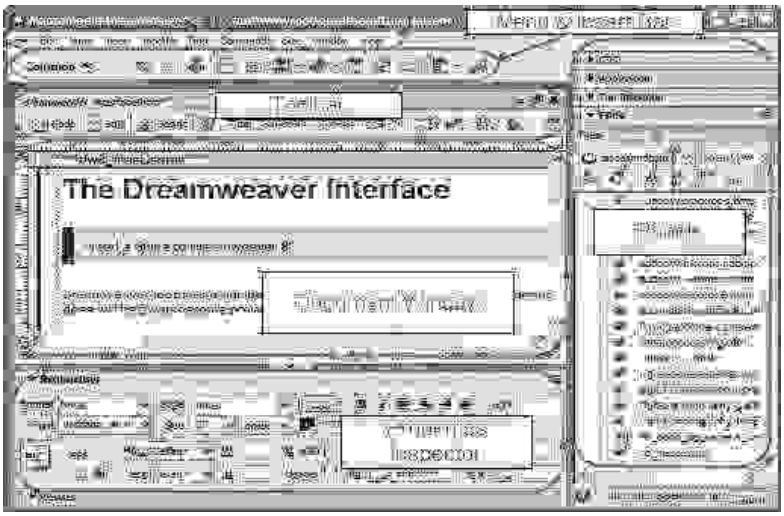


Figure 246: Dreamweaver interface

The Document toolbar: Contains buttons that provide options for different views of the Document window (such as Design view and Code view), various viewing options, and some common operations such as previewing in a browser.

The Menu and Insert bar: Across the top of the application window contains a workspace switcher, menus and other application controls. To display the Standard toolbar, select View

> Toolbars > Standard. The toolbar contains buttons for common operations from the File and Edit menus very similar to MS Word: New, Open, Browse in Bridge, Save, Save All, Print Code, Cut, Copy, Paste, Undo, and Redo.

The Document window: Displays the current document as you create and edit it. To switch to a document, click its tab. The Document Window is the main workspace where you insert and arrange the elements on your web page. Most of your work inserting text and images on your web page is done in the Document Window.

You can select any of the views. Description of the important views is given below.

Design view: A design environment for visual page layout, visual editing, and rapid application development. In this view, Dreamweaver displays a fully editable, visual representation of the document, similar to what you would see when viewing the page in a browser.

Code view: A hand-coding environment for writing and editing HTML, JavaScript,

Split Code view: A split version of Code view that lets you scroll to work on different sections of the document at the same time.

Code and Design view: Lets you see both Code view and Design view for the same document in a single window.

Live view: Similar to Design view, Live view displays a more realistic representation of what your document will look like in a browser, and lets you interact with the document exactly as you would in a browser. Live view is not editable. However, you can edit in Code view and refresh Live view to see your changes.

Copyright Virtual University of Pakistan

Live Code view: Only available when viewing a document in Live view. Live Code view displays the actual code that a browser uses to execute the page, and can dynamically change as you interact with the page in live view. Live Code view is not editable.

Properties Inspector as shown in the Figure 247 also called the Tag Inspector. The Property Inspector is used to display and edit attributes or properties of any element that is selected in the Document Window. Click the Property Inspector's Hide button to hide the panel temporarily.



Figure 247: Properties panel

Copyright Virtual University of Pakistan

Module 232

232. Web page Development (Inserting Tables using Dreamweaver)

First save the document that you got after clicking new HTML document in the welcome screen as shown in the Figure 248.

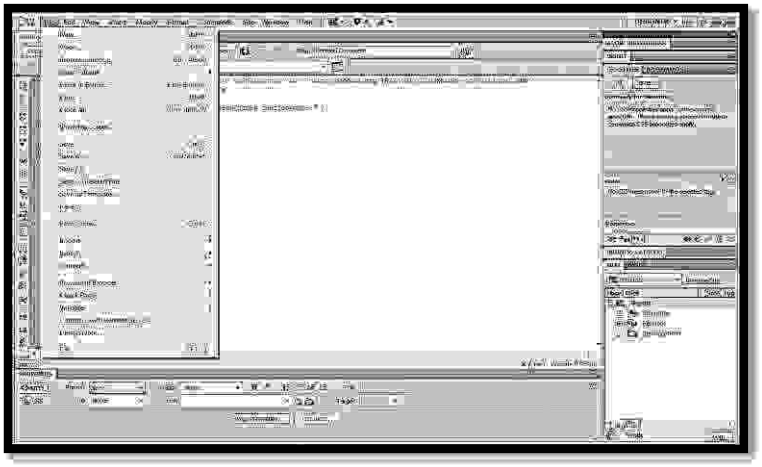


Figure 248: Add new page

Now add HTML page as shown in the Figure 249.

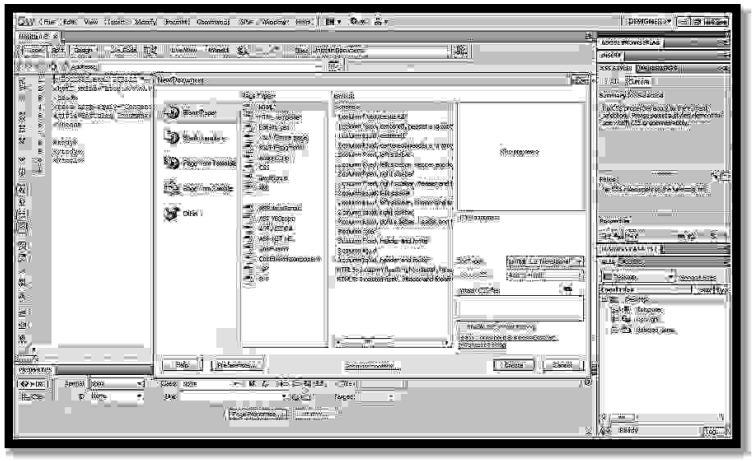


Figure 249: Adding HTML page

Copyright Virtual University of Pakistan

Now give a name to the page as shown in the Figure 250.

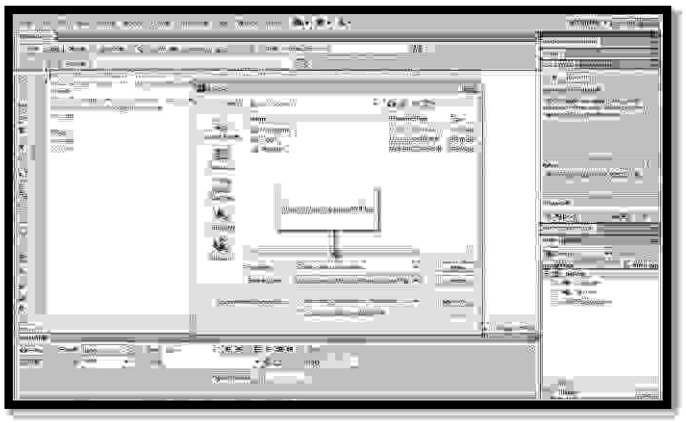


Figure 250: Naming the page

To insert table, just go to the Insert tab and add the table as shown in the Figure 251.

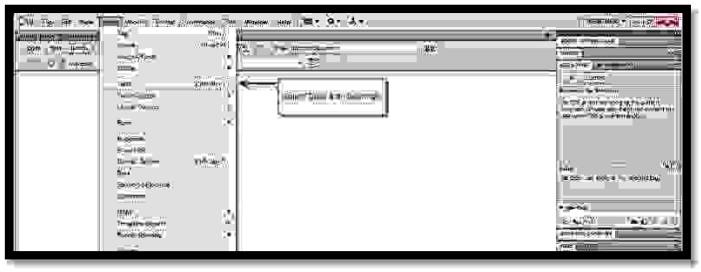


Figure 251: Insert Table

You can then specify number of rows and columns as shown in the Figure 252.

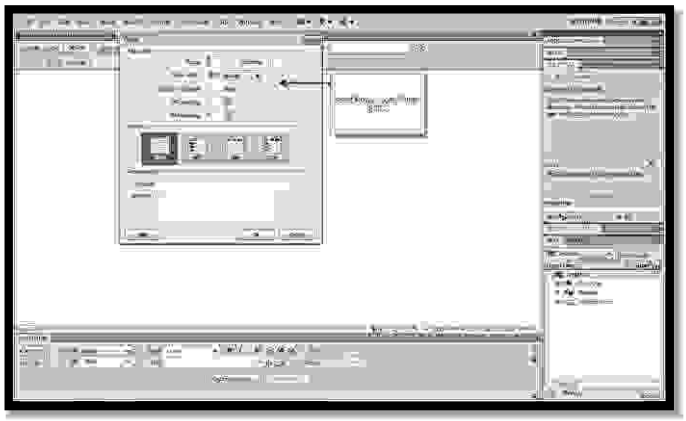


Figure 252: Rows and columns

You can then adjust the size of the rows as shown in the Figure 253.

Copyright Virtual University of Pakistan

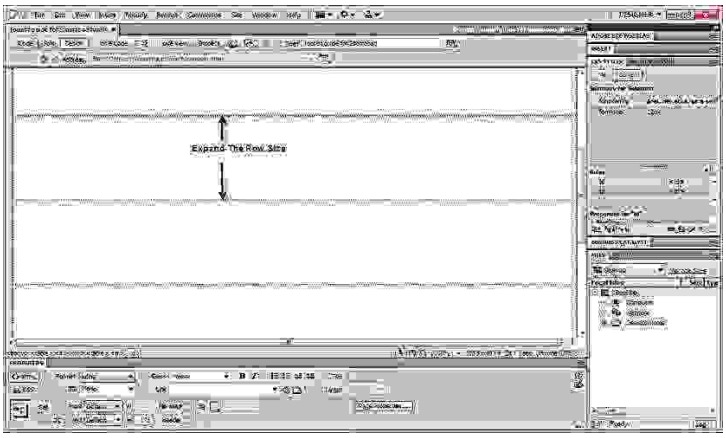


Figure 253: Adjusting row sizes

Copyright Virtual University of Pakistan

Module 233

233. Web page Development (Inserting Lists)

Bulleted lists might be familiar to you if you have worked with word processing or desktop publishing applications. Lists are a helpful way to present information to a reader without the formal constraints of a paragraph. They are especially important on the Web. Studies indicate that people typically skim web pages instead of reading them from beginning to end. Creating lists will make it easier for your visitors to get the most from your website without sifting through several paragraphs of text.

On the events.html page, click and drag to highlight the text which you want to put in the list.

Make sure you have the HTML button selected in the Property Inspector at the bottom of your page, and click the Unordered List button as shown in the Figure 254. The highlighted text becomes indented, and a bullet point is placed at the beginning of each line.



Figure 254: Adding unordered list

Use the Unordered List button in the Property Inspector to create a bulleted list.

Click the Ordered List button to the right of the Unordered List button. The bullets change to sequential numbers.

Choose Format > List > Properties to open the List Properties dialog box. Choose Bulleted List from the List type drop-down menu to return to your first style of list. The Numbered List and Bulleted List options in the List type drop-down menu also allow you to switch between ordered and unordered lists.

From the Style drop-down menu (see Figure 255), choose Square. This changes the default circular bullets to square bullets. Click OK to exit the List Properties dialog box.

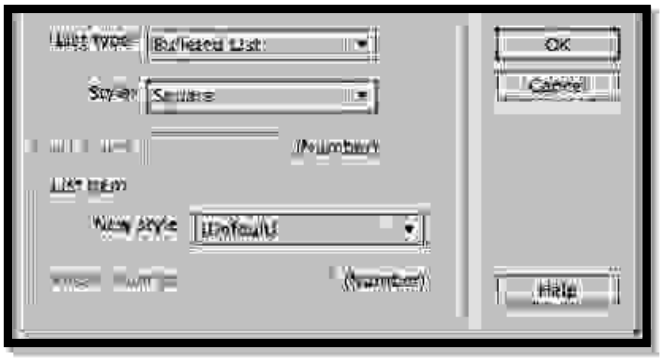


Figure 255: List of properties

Copyright Virtual University of Pakistan

Module 234

234. Web page Development (Inserting Images)

Adding image is very easy using Dreamweaver.

Go to Insert tab and press Image button as shown in the Figure 256.

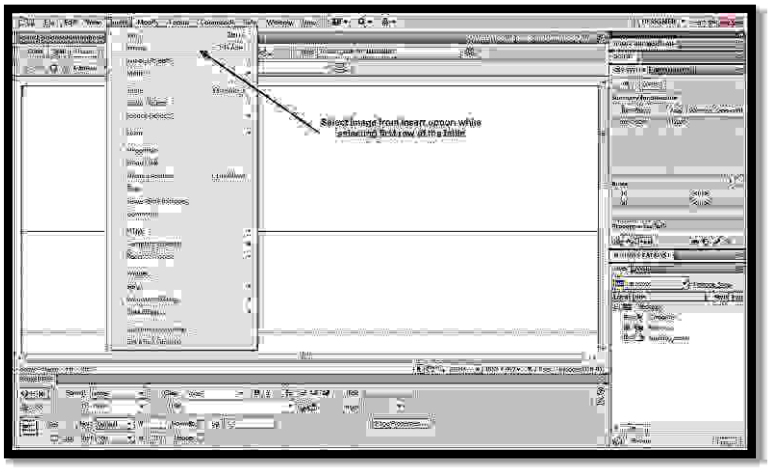


Figure 256: Inserting Image

Then you will be given the option to select the impage from your drive as shown in the Figure 257. You can select the required image and it will be added to your webpage wherever you had placed the cursor.

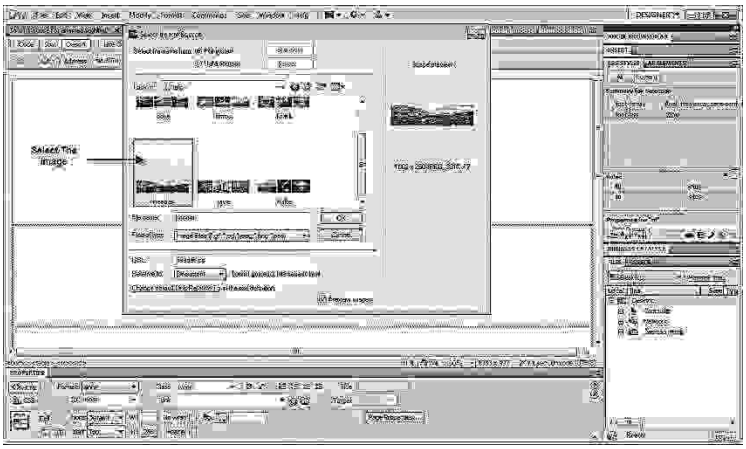


Figure 257: Browse Image

Copyright Virtual University of Pakistan

CS101-Intorduction to Computing

(Solved Macq's)

LECTURE FROM (23 to 45)

Junaidfazal08@gmail.com
Bc190202640@vu.edu.pk

FOR MORE VISIT
VULMSHELP.COME

JUNAID MALIK
0304-1659294

AL-JUNAID TECH INSTITUTE

www.vulmshelp.com



Language Courses Training Available

I'm providing paid courses in different languages within 3 Months,Certificate will be awarded after completion.

- HTML
- CSS
- JAVASCRIPT
- BOOTSTRAPS
- JQUERY
- PHP MYSQL
- NODES.JS
- REACT JS

LMS Handling Services

LMS Activities Paid Task

Assignments 95% Results

Quizes 95% Results

GDB 95% Results

For CS619 Project Feel Free To Contact With Me

Ph# 0304-1659294
Email: junaidfazal08@gmail.com

AL-JUNAID INSTITUTE GROUP

1. The result of---------- step in the entire development process should be “tested” for accuracy

Each intermediate step

2. From a lay- person’s perspective, design is often equated with

How

3. The amount of paper American use in a year is:

85 million tons

4. Which of the following might be used to convert high-level language instructions into machine language?

An interpreter

5. Table group is a part of_____ribbon:

Insert

6. Attacks can be made to prevent access to websites by crashing:

Servers

7. Which of the following statement is used for output in C++?

cout<<

8. A model which represents the shift away from strict adherence to the waterfall model is:

Iterative model

AL-JUNAID INSTITUTE GROUP

9. A rapidly expanding subject that is closely associated with database technology is_____, which consists of techniques for discovering patterns in collections of data.

Data mining

10. In the case of highly standardized languages, compiler designers often provide features, sometimes called

Language extension

11. The system's interface should be designed for the _____.

all of above

12. Which of the following might be used to convert high-level language instructions into machine language?

An interpreter

13. True parallel processing requires-------- CPU cores

Multiple

14. Which of the following technique is used in software testing that examines the functionality of an application without peering into its internal structures or workings.

Black box testing

15. Which of the following is a robot used in medical field :

Belgian robot

16. In modern computer applications, problems are more easily solved in the context of:

AL-JUNAID INSTITUTE GROUP

Technology

17. Turing gave a percentage of a machine that will have a chance to pass Turing test in year:

2000

18. In Belgian Pepper Robot works in:

Hospitals

19. Meaning of a statement in natural language depends on its:

Style

20. Shortcut to insert an end note in MS word is

Alt + Ctrl + D

21. Stakeholders can be a

Government agencies

22. Gaming addiction can cause problems:

Environmental

23. Illustration is a part of ribbon:

Insert

24. DBMS stands for_____?

Database management system

25. What will be the output of the following code?

```
int main()
{
```

```
int x = 9;

while (x>0)

x=x-1;

cout<<x;

return 0;

}
```

0

26. In context of health, computer sciences have impacts:

Both positive & negative

27. If the result after comparison of two variables in relational operators is False, then if statement returns value.

0

28. Now if the result after comparison of two variables is True, then if statement returns value

1

29. A mnemonic system for representing programs is collectively called a numbers

Machine language

30. Second phase of the development phase of the software development life cycle is:

Bb

AL-JUNAID INSTITUTE GROUP

31. Which software testing methodology is to develop a set of test data that insures that each instruction in the software is executed at least once?

White-box testing

32. Each statement in natural language can have:

AA

33. Find option includes:

All of above

34. A device that responds to stimuli from its environment:

Agent

35. Format painter is in group of:

Design

36. In particular, the chart that indicates the entire game is overseen by a function named _____

Control Game,

37. The description of the object's properties is called

Class

38. Editing group has commands:

5

39. Style groups in MS-word can have:

Functions

AL-JUNAID INSTITUTE GROUP

40. Control structure iterates a set of instructions based on the provided condition called

Conditional

41. Information security Risks include:

Online scam

42. Each programming language tends to approach the parallel processing paradigm and have different terminology. In Ada we use term ….for this purpose.

Thread

43. The option of bullets is in group:

Paragraph

44. An analogy to the fact that the development process was allowed to flow in only one direction called

Waterfall model

45. Content filtering is used to implement company policies related to usage of:

Information system

46. 5%2 would give

1

47. Which of the following symbol is used at the end of the line to separate statements in many imperative languages?

;

48. Privacy is the "right to be let alone" is written by:

AL-JUNAID INSTITUTE GROUP

Samuel D. Warren

49. "Displaying Text in Two Columns" feature is in which tab of MS Word?

Page Layout

50. ------- refers to data items that can take on only the values true or false

Boolean

51. If we want to end a page at a specific point and move to the next page we can use:

Page end

52. AI is helping to make:

Robots

53. Which of the following is the contrast of the Declarative paradigm?

Imperative paradigm

54. Which one is a unary operator?

NOT

55. Quick Access Toolbar by default includes:

All of these

56. The option of strike through is in group:

Font

AL-JUNAID INSTITUTE GROUP

57. In modern computer applications, problems are more easily solved in the context of:

Technology

58. Equal to sign is

=

59. Actions according to environment knowledge:

Reflex action

60. To retrieve the information about an employee, we must select the _____with the appropriate identification attribute value from the EMPLOYEE relation.

Table

61. How many common forms of data mining?

Two

62. Insert tab can have group:

Pages

63. Writing programs in a machine language is a tedious task that often leads to errors that must be located and corrected

Debugging

64. We have paste options:

Multiple

65. A significant example of iterative techniques is:

Rational unified process

66. A software license is a _____ between the owner and user of a software product that grants the user certain permissions to use the product without transferring ownership rights to the intellectual property.

Legal agreement

67. Page group includes options:

Cover page

68. The syntax for using && is:

Cmd1 && cmd 2

69. Smart art was introduced in MS word version

2007

70. If the result after comparison of two variables in relational operators is False, then if statement returns value

0

71. When we apply header it is shown at:

Start page of document

72. A translator which takes assembly language program as input & produce machine language code as output is known as:

Assembler

73. Theoretical track is a part of:

AL-JUNAID INSTITUTE GROUP

Declarative knowledge

74. In MS-word different type of effects on the text can be applied with:

All of given

75. While_____and software license agreements provide legal avenues to inhibit outright copying and unauthorized use of software.

Copy rights

76. Social sites includes:

Twitter

77. Correct syntax is:

If (condition) Statement a Else Statement B.

78. There we found that a register called a_____is used to hold the address of the next instruction to be executed.

program counter

79. Software Engineering is an engineering discipline that is concerned with:

All aspects of software production

80. Microsoft office includes:

Word

81. In some cases, the data collection process is readily apparent; in others it is:

Subtle

AL-JUNAID INSTITUTE GROUP

82. Access to the forbidden literature is because of:

Computer

83. _____are ideal for storing data that will be processed in the order in which the file's entries are stored.

Sequential files

84. Change case control is an example of:

Dropdown menu

85. A program DOCTOR developed by Joseph Weizenbaum in the mid-1960s named as:

Eliza

86. Information that was once buried in arcane records has become accessible because of:

Database

87. Meaning of a statement in natural language depends on the manner in which it is:

88. Programming languages are well-designed so that each statement has_____meaning:

Only one

89. _____is based on real time factory concept.

Factory pattern

90. The fifth group in the home ribbon is the:

Eliding

91. Retailers maintain record of their costumers:

Purchases

92. USA has passed legislation allowing the government to actively monitor citizens in the name of:

National security

93. Data mining is practiced on_____data collections, called data warehouses.

static

94. The links between_____in an object-oriented database are normally maintained by the DBMS.

Objects

95. In which of the following paradigms, a program is constructed by connecting smaller predefined program units.

Functional paradigm

```
Int i=1;
While(i<=5)
{
Cout<<i;
I=i+1;
}
```

How many times loop will execute?

AL-JUNAID INSTITUTE GROUP

5

96. Paste option is a part of home ribbon group called:

Clipboard

97. Editing group have commands:

3

98. People are working in sitting position due to computer science and thus have more chance to develop:

Obesity

99. The style group in the home ribbon is the:

Fourth group

100. The sign of modulus is

%

101. _____ deals with designing systems that harmonize with the physical abilities of humans.

Ergonomics

102. The communication between people because of computer science has:

Improved

103. Content filtering works by matching_____of characters:

Strings

104. Easy access to online health centres is because of:

Database

AL-JUNAID INSTITUTE GROUP

105. A_____is a collection whose entries have a hierarchical organization similar to that of an organization chart of a typical company.

Tree

106. Sophisticated packages designed primarily for the software engineering environment known as

DIES

107. The default theme of MS-Word document is:

Office

108. While_____and software license agreements provide legal avenues to inhibit outright copying and unauthorized use of software.

Copyrights

109. The option of justify is in group:

Paragraph

110. ---------stages about developing a solution to the problem

Design

111. A_____is a description of only that portion of the database pertinent to a particular user's needs.

Subschema

112. 1Which is Boolean operator for logical AND.

&

113. Content Risks include:

AL-JUNAID INSTITUTE GROUP

Harmful Advice

114. One operation we might want to perform on a relation is to select_____possessing certain characteristics and to place these selected _____in a new relation.

tuple, tuple

115. In the case of highly standardized languages, compiler designers often provide features, sometimes called

Language extension

116. We can add charts in MS-word from group:

Table

117. 1Turing test was purposed in:

1950

118. 1Act that ranges government restrictions on wire taps to include transmissions of data is:

ECPA

119. Computer science helps in faster response times through:

All of given

120. In_____software tester is aware of the interior structure of the software and uses this knowledge when designing the test.

Black-box testing

121. The field of artificial intelligence is being pursued along paths:

AL-JUNAID INSTITUTE GROUP

3

122. 1Software licenses are:

All of these

123. Requiring certain degree of uniformity of the style, size and orientation of symbols is a(n):

CCCC

124. The term programming paradigm is a misnomer. A more realistic term would be Non-Procedural paradigms

Nontraditional paradigms

125. 1In turn the collected information is potentially available to:

All of these

126. Major component of syntactic analysis is:

DD

127. In assembly language, the instructions like MOV or ADD are called as_____

OP-Code

128. We have to write an equation with 2 as a number and 3 as its power. Which option can be used for this purpose?

BB

129. The imperative paradigm, also known as the Particular machine

Procedural paradigms

130. Third generation language attributes refer to

Particular machine

AL-JUNAID INSTITUTE GROUP

131. Computer security is also known as:

Cyber-security

132. In_____if two modules interact with the same item of data, then modifications made to one module may affect the other.

Data coupling

133. Retailers maintain record of their costumers:

Purchases

134. Each programming language tends to approach the parallel processing paradigm and have different terminology. In Ada we use term ….for this purpose.

Task

135. A specific example is the _____series of standards, which address numerous industrial activities such as design, production, installation and servicing.

ISO 9000

136. In Object Oriented Paradigm, each object will have its own collection of functions which is known as:

Classes

137. 1Pages is an option in the ribbon:

Insert

138. Learning procedural knowledge usually involves a process:

Trial-and-error

AL-JUNAID INSTITUTE GROUP

139. A model which represents the shift away from strict adherence to the waterfall model is:

Iterative model

140. Distinction between software engineering and other engineering disciplines is the lack of quantitative techniques, called

Metrics

141. The term cohesion refers to this _____.

1ogical cohesion

142. Ethical issues are related to:

Moral principles

143. Modules come in a variety of_____.

Forms

144. _____begins the paragraph with a large letter that spills down into the text:

Drop cap

145. Plagiarism is a major problem in:

Education

146. Shortcut key of cut is:

Ctrl+x

147. Which intermodal coupling occurs when a module passes control of execution to another, as in a function call?

control coupling

148. Process of understanding what the characteristics of images means refers to:

Analysis

149. This _____view of the database is called a database model.

Conceptual

150. If we want to end a page at a specific point and move to the next page we can use:

Page end

151. 1A file's _____is normally stored as a separate file on the same mass storage device as the__ _____.

index , indexed file

152. Declarative paradigms system is design for

All of these

153. 1A_____is a pre-developed model for solving a recurring problem in software design.

design pattern

154. The conceptual shape or arrangement of data is known as

Data structure

AL-JUNAID INSTITUTE GROUP

155. Which of the following language is related to functional paradigm?

Python

156. This conceptual view of the database is called a _____ model.

Database

157. Electronic Theft include

Cyber bullying

158. Control structure iterates a set of instructions based on the provided condition called

Loop

159. Shortcut key of paste is:

Ctrl+v

160. Which from the following is not a relational operator?

! =

161. We can highlight a text from group:

Font

162. Reports can be received at home through email because of advancement in:

Artificial intelligence

163. CAN-SPAM Act applies in:

US

164. In particular, the chart that indicates the entire game is overseen by a function named _____

Controlgame

165. A translator which takes assembly language program as input & produce machine language code as output is known as:

Assembler

166. Which of the following is social issue?

All of given

167. A rapidly expanding subject that is closely associated with database technology is_____, which consists of techniques for discovering patterns in collections of data.

Data mining

168. 1Assignment statement is

=

169. The term _____refers to a collection of data that is multidimensional in the sense that internal links between its entries make the information accessible from a variety of perspectives.

Database

170. The statement z=x+y shows

The sum of X and Y be assigned to the variable Z

171. 1The Turing test result of program DOCTOR developed by Joseph Weizenbaum was:

Ambiguous

AL-JUNAID INSTITUTE GROUP

172. A process which is used by the software industry to design, develop and test high quality software is known as:

Software life cycle

173. 1Shortcut key to select the whole text in a document

Ctrl+a

174. In the case of the incremental model these prototypes evolve into the complete, final system, a process known as_____.

Evolutionary prototyping

175. Microsoft office includes:

Word

176. Design ribbon can have:

Page border

177. The option of strike through is in group:

Particular machine

178. The field of artificial intelligence is being pursued along paths:

2

179. Design phase is followed by……

Implementation

180. The point at which all the steps in a transaction have been recorded in the log is called the_____.

commit point

AL-JUNAID INSTITUTE GROUP

181. "Displaying Text in Two Columns" feature is in which tab of MS Word?

Page Layout

182. Command that can immediately go to a page or any marked location within your document:

Go to

183. Ctrl+y is used for:

Redo

MC100401285 moaaz.pk@gmail.com MOAZ SIDDIQ

FINALTERM EXAMINATION
Spring 2010 Final
CS101- Introduction to Computing (Session - 2)

Question No: 1 (Marks: 1) - Please choose one
Human are better than computers at:
► Efficiency ► Accuracy **► Pattern recognitio** ► None of the given choices

Question No: 2 (Marks: 1) - Please choose one
Cray-1 was first commercial _____ computer
► Super ► Mini ► Micro ► Personal

Question No: 3 (Marks: 1) - Please choose one
URL is a/an _____
► Device ► Component **► Address** ► Tool

Question No: 4 (Marks: 1) - Please choose one
Mainframe Computers are also called _____
► Enterprise Servers ► Personal Servers ► Enterprise Managers ► Window Servers

Question No: 5 (Marks: 1) - Please choose one
Which of the following is NOT a category of Mobile Computers?
► Laptop ► Palmtop **► Desktop** ► Wearable

Question No: 6 (Marks: 1) - Please choose one
Preliminary exploration of possible solutions, technologies, suppliers is called
► Viability **► Feasibility** ► Specification ► Integration

Question No: 7 (Marks: 1) - Please choose one
_____ give us the ability to manipulate data through reference instead of actual value.
► Constants **► Variables** ► Data Types ► Operators

Question No: 8 (Marks: 1) - Please choose one
Consider the following statement written in JavaScript:
str = ”Hello” + ” World”
What will be the value of str ?
► HelloWorld ► Hello World ► Hello + World ► It will result in error

Question No: 9 (Marks: 1) - Please choose one

A tool that helps you to find the synonyms is called _____.

► Language ► Paragraph **► Thesaurus** ► Symbol

Question No: 10 (Marks: 1) - Please choose one

Communication protocol is a _____that governs the flow of information over a network

► Set of protocols **► Set of rules** ► Device ► Set of methods

Question No: 11 (Marks: 1) - Please choose one

If a computer could pass the Turing test then it would be able to:

► think like human beings

► do the things faster

► win a million dollar prize

► store more information

Question No: 12 (Marks: 1) - Please choose one

The first Web browser with a GUI was generally available in:

► 1992 **► 1993** ► 1994 ► 1995

Question No: 13 (Marks: 1) - Please choose one

Web is a unique invention by humans in terms that it is:

► accessible to only the owners who control it

► accessible from particular locations only

► accessible to all humans

► accessible to only the educational institutes

Question No: 14 (Marks: 1) - Please choose one

In this URL http://www.msn.com , _____identifies the domain name

► http ► www **► msn** ► com

Question No: 15 (Marks: 1) - Please choose one

_____ is simply a fast port that lets you connect computer peripherals and consumer electronics to your computer without restart.

► Freeware ► Shareware **► Firewire** ► Firmware

Question No: 16 (Marks: 1) - Please choose one

Which of the following is NOT supported by PC's power supply.

► -12 and +12 V DC **► -10 and +10 V DC** ► -5 and + 5 V DC ► All are supported

Question No: 17 (Marks: 1) - Please choose one

In which case Cache Memory is used

► To increase RAM speed

► To overcome BUS speed

► To overcome Speed rate between RAM and CPU

► To overcome CPU speed

Question No: 18 (Marks: 1) - Please choose one

To display a single line text area on the web page, we use ___ tag

► TEXT ► TEXTBOX ► **INPUT** ► INPUTBOX

Question No: 19 (Marks: 1) - Please choose one
If an algorithm is syntactically correct, but semantically incorrect then this situation is
► Very good situation
► **Very dangerous situation**
► Not very bad
► Neutral situation

Question No: 20 (Marks: 1) - Please choose one
Users communicate with the computer using a consistent user interface provided by the OS.
► **True** ► False

Question No: 21 (Marks: 1) - Please choose one
Application developers do not need to know much about the HW, especially the microProcessor, while they are developing their application.
► **True** ► False

Question No: 22 (Marks: 1) - Please choose one
The first spread sheet program was invented by
► Charles Babbage ► **Dan Bricklin** ► Paul Graham ► John von Neumann

Question No: 23 (Marks: 1) - Please choose one
Which representation technique of algorithm is more suitable for developer to make actual code_____.
► **pseudo code** ► flow chart ► both pseudo code and flow chart ► Heuristics

Question No: 24 (Marks: 1) - Please choose one
_____ is used to terminate all JavaScript statements.
► Colon ► **Semicolon** ► Underscore ► Apostrophe

Question No: 25 (Marks: 1) - Please choose one
In java script cookies can be created for future use_____.
► Easily
► No facility at all
► This is not possible without Java language.
► **Cookies are files so java script can not handle it.**

Question No: 26 (Marks: 1) - Please choose one
When the microprocessor desires to look at a piece of data, it checks in the _____ first.
► RAM ► ROM ► hard disk ► **cache**

Question No: 1 (Marks: 1) - Please choose one
Using Java Script you can write a character at random location on screen
► By applying randomCh() method
► With the help of String object
► With the help of random character property
► There is no built in approach in Java Script

Question No: 2 (Marks: 1) - Please choose one
If incorrectly we enter the negative age it is check by
► **Limit Integrity** ► Type Integrity ► Referential Integrity ► Physical Integrity

Question No: 3 (Marks: 1) - Please choose one
The Encryption of data is related to
► Data updates ► **Data security** ► Data integrity ► Data accessibility

Question No: 4 (Marks: 1) - Please choose one
Which protocol is use to transfer a file over the network ?
► UDP ► **FTP** ► TCP ► OSI

Question No: 5 (Marks: 1) - Please choose one
One can send an email message to a remote computer using _____ protocol
► HTTP ► **SMTP** ► FTP ► TELNET

Question No: 6 (Marks: 1) - Please choose one
In a System having many parts to be designed, one should always do the _____ first
► **Hard part** ► Simple part ► Development part ► Quality part

Question No: 7 (Marks: 1) - Please choose one
Flow control constructs in JavaScript includes:
► If-Else ► Loops and If -Else ► **Switch and If-Else** ► All of the given choices

Question No: 8 (Marks: 1) - Please choose one
___ provides a simple, consistent way for applications to interact with the HW without having to know all the details of the HW
► Explorer.exe ► **System Files** ► Operating System Application Software

Question No: 9 (Marks: 1) - Please choose one
Machine language is also called
► Assembly Language ► **Binary Language** ► High Level Language ► HTML Language

Question No: 10 (Marks: 1) - Please choose one
_____ is the best known builder for supercomputers.
► Sun ► **Cray Research** ► Microsoft ► Apple

Question No: 11 (Marks: 1) - Please choose one
The weaknesses of the computer are:
► Pattern recognition & Storage
► Speed & Innovative ideas
► **Pattern recognition & Innovative ideas**
► Speed & Storage

Question No: 12 (Marks: 1) - Please choose one
Communication protocol is a _____that governs the flow of information over a network
► Set of methods ► Set of protocols ► **Set of rules** ► Device

Question No: 13 (Marks: 1) - Please choose one
_____ team is responsible for the maintenance, expansion , improvement of the infrastructure consisting of workstations, networking equipment, software and network security.
► Support ► Configuration Management ► Quality Assurance ► **Developer**

Question No: 14 (Marks: 1) - Please choose one
_____ team consists on the sharpest technical minds in the company.
► **Architecture** ► Business Development ► Configuration Management ► Developer

Question No: 15 (Marks: 1) - Please choose one
_____ is responsible for day to day operations.
► CEO ► **COO** ► CMSO ► Developer

Question No: 16 (Marks: 1) - Please choose one
One of the key responsibilities of the _____ is client relationship management.
► **Project Manager** ► Team Lead ► Developer ► Quality Assurance Engineer

Question No: 17 (Marks: 1) - Please choose one
What is the major problem with flash based website?
► **Its two heavy** ► Cannot be indexed ► Less attractive ► Inaccessible

Question No: 18 (Marks: 1) - Please choose one
Which of the following is NOT an event handler for image object?
► onAbort ► onError ► onLoad ► onUser

Question No: 19 (Marks: 1) - Please choose one
The organizations are learning that business can be done in a more effective manner if emphasis is placed upon _____.
► Cooperation ► **Shared responsibility** ► Networking ► All of the given options

Question No: 1 (Marks: 1) - Please choose one
_____
It represents the _____ flow chart element.

► Flow Line ► Connector ► Off-page connector ► **Start or Stop**

Question No: 2 (Marks: 1) - Please choose one

What is NOT a key factor while designing a website?

► Usability ► User-friendly ► Consistency ► **Complexity**

Question No: 3 (Marks: 1) - Please choose one

_____% of the users have left websites in frustration due to poor navigation.

► 40 ► 62 ► **83** ► 91

Question No: 4 (Marks: 1) - Please choose one

In JavaScript, a variable declaration is

► **Optional** ► Mandatory ► Not allowed ► None of the given

Question No: 5 (Marks: 1) - Please choose one

A protocol used for receiving email messages is called _____.

► URL ► Telnet ► **POP3** ► SMTP

Question No: 6 (Marks: 1) - Please choose one

Which is correct?

► **onUnload** ► onUnLoad ► onUNLOAD ► All of the above

Question No: 7 (Marks: 1) - Please choose one

Serial arrangement in which things follow logical order or a recurrent pattern, such as statements executing one by one, is called _____.

► **Loop** ► Sequence ► Condition ► Array

Question No: 8 (Marks: 1) - Please choose one

Variables allow us to manipulate data through the _____.

► Actual Value ► **Reference** ► Length ► Name

Question No: 9 (Marks: 1) - Please choose one

Fuzzy logic is based on _____.

► Ground facts ► Experience ► Practice ► **Approximation**

Question No: 10 (Marks: 1) - Please choose one

Word Processor is a

_____

► System Software ► **Application Software** ► Device ► Utility

Question No: 11 (Marks: 1) - Please choose one

_____ In the old days, databases did NOT support _____.

► Number ► Boolean ► **Video** ► Text

Question No: 12 (Marks: 1) - Please choose one

_____ In tabular storage, fields placed in a particular row are strongly _____.

► Independent ► Dependent ► **Interrelated** ► Inconsistent

Question No: 13 (Marks: 1) - Please choose one

_____ Due to working at home, lack of interaction may result in _____ professional growth.

► **Slower** ► Faster ► Higher ► Improved

Question No: 14 (Marks: 1) - Please choose one

_____ Distance learning has got a boost due to the _____.

► Easy communication ► Online interactive contents ► Flexibility

► **All of the given options**

Question No: 15 (Marks: 1) - Please choose one

_____ _____ technique can be used to create smooth animations or to display one of several images based on the requirement.

► Image downloading ► **Image preloading** ► Image uploading

► Image postloading

Question No: 16 (Marks: 1) - Please choose one

_____ The _____ is becoming the preferred organizational structure for more and more organizations with the passage of time.

► Tree structured organizational model

► **Network paradigm** ► Hierarchical structure ► None of the given options

Question No: 17 (Marks: 1) - Please choose one

_____ The group of technologies concerned with the capturing, processing and transmission of information in the digital electronic form is called _____.

► Telecom Engineering

► Computer Engineering

► Computer Science

► **Information Technology**

Question No: 18 (Marks: 1) - Please choose one

A large number of networks interconnected physically are called _____

► **LAN** ► MAN ► Internet ► Network collection

Question No: 19 (Marks: 1) - Please choose one

TCP stands for _____.

► Transfer Center protocol ► **Transmission Control Protocol**
► Transmission Center Protocol ► Telephone Center Protocol

Question No: 20 (Marks: 1) - Please choose one

A collection of data organized in such a way that the computer can quickly search for a desired data item is known as:

► Retrieving ► **Database** ► Information ► DBMS

Question No: 21 (Marks: 1) - Please choose one

_____ is simply a fast port that lets you connect computer peripherals and consumer electronics to your computer without restart.

► Freeware ► Shareware ► **Firewire** ► Firmware

Question No: 22 (Marks: 1) - Please choose one

Structures, in which another list starts before the first list is finished, are called:

► Multiple Lists ► **Nested Lists** ► Ordered Lists ► Un-ordered Lists

Question No: 23 (Marks: 1) - Please choose one

The key property of the 'Array' object in JavaScript is

► Value ► **Length** ► Name ► All of the given choices

Question No: 24 (Marks: 1) - Please choose one

Which one is the example of spreadsheet software?

► MS Word ► MS PowerPoint ► **MS Excel** ► MS Access

Question No: 25 (Marks: 1) - Please choose one

The Encryption of data is related to

► Data updates ► **Data security** ► Data integrity ► Data accessibility

Question No: 26 (Marks: 1) - Please choose one

_____ is the process of analyzing large databases to identify patterns.

► Data normalization ► Data management ► **Data Mining** ► None of the given options

Question No: 27 (Marks: 1) - Please choose one

Which is the user-friendly way of presenting data?

► Query ► Form **► Report** ► All of the given options

Question No: 28 (Marks: 1) - Please choose one

JavaScript function fixed () has equivalent HTML tag-set ____

► <.FIX>……</FIX> ► <F>……..</F>

► <PRE>…… </PRE> ► <H>……..</H>

Question No: 29 (Marks: 1) - Please choose one

<Form> Tags always placed between the <BODY> and </BODY> tags of a Web page

► True

► False

Question No: 30 (Marks: 1) - Please choose one

Java script has ------- ---------- ability to create and draw graphics.

► Limited ► Versatile ► Medium **► Not at all**

Final term paper

1-when actions depends upon the values of multiple variables we ll use -----?

1-if 2-else 3-if----else 4-none

2-when the exact number of iterations is known use the ----loop ?

1-for 2-if 3-while 4-none

3-when the number of iteration depend upon a condition being met use the ------ loop

1-for 2-switch 3-while 4-none

4-the key property of ''array ''object is ----------?

1-length 2-width 3-single 4-none

5-two of the key ''array ''methods are reverse ()-sort()

1-true 2-false

6-javascript array are -------?
1-multiple 2-herterogenous 3-homogenous 4-none

7------multiple computer that are connected together to share information and other resources
1-network 2-internets 3-compnetworks 4-none

8 – comp networks can send an email message to a remote comp using the ---- protocol?
1-HTTP 2-FTP 3-SMTP 4-none

9-comp network can browse documents residing on a remote comp using -------?
1-HTTP 2-FTP 3-SMTP 4-none

10-comp networks can download and upload files to a remote comp using ------?
1-HTTP 2-FTP 3-SMTP 4-none

11- network can run a program on remote comp using the ----------?
1-SMTP 2-TELNET 3-HTTP 4-none

12-components of convertional computer networks are except one ?
1-VPN 2-NIC 3-computers 4-hub

13-NIC stands for ----------?
1-national internet cables 2-national interface cards
3-network interface cards 4-none

14-cables are either----------?
1-electrical 2-digita l3-optical 4-1 and 2

15- hub component of comp network is ----------?
1-I/O device 2-traffic controller
3-network traffic controller 4-none

16- optical cables are required by wireless networks
1-true 2-false

17------ a deviece used to connect several computer to form a network

1-hub 2-cable 3-NIC 4-none

18- a hub has several -----?

1-NIC 2-cables 3-packet 4-ports

19- ------ smaller unit of data transmitted over a comp network

1-hub 2-port 3-packet 4-none

20- all packets travel----------?

1-dependently 2-independently 3-alternatively 4-none

Question No: 1 (Marks: 1) - Please choose one

---------- was known as "mill" in Analytical engine.

► Memory ► **Processor** ► Monitor ► Mouse

Question No: 2 (Marks: 1) - Please choose one

First electronic computer was

► ABC ► **UNVAC 1** ► Harvard Mark 1 ► IBM PC

Question No: 3 (Marks: 1) - Please choose one

What is NOT a key factor while designing a website?

► Usability ► User-friendly ► Consistency ► **Complexity**

Question No: 4 (Marks: 1) - Please choose one

What happens if I start a new list without closing the original one?

► An error will be generated ► **A nested list will be created**

► Previous list will end and a new will start. ► Nothing will happen

Question No: 5 (Marks: 1) - Please choose one

The most upper right pixel of the screen is of _____ color.

► **Any** ► Red ► Green ► Blue

Question No: 6 (Marks: 1) - Please choose one

A single pixel can acquire approximately _____ color schemes.

► 1 million ► 2 million ► 10 million ► **16 million**

Question No: 7 (Marks: 1) - Please choose one

The idea of Neural Networks field is based upon _____.

► Human nature ► **Human brain** ► Human culture ► Human actions

Question No: 8 (Marks: 1) - Please choose one
Which one of the following is an application for artificial intelligence?
► **Robotic** ► Web Agent ► Decision Support System ► All of the given options

Question No: 9 (Marks: 1) - Please choose one
Register is a kind of _____memory
► **Fast** ► Super fast ► Slow ► Very slow

Question No: 10 (Marks: 1) - Please choose one
Which of the following is a true statement?
► Flat-file storage is better than tabular storage.
► **Tabular storage is better than flat-file storage.**
► Flat-file storage is better than relational storage.
► None of the given options

Question No: 11 (Marks: 1) - Please choose one
substring(n, m) returns a string containing characters copied from position n to_____.
► m – 2 ► **m – 1** ► m + 1 ► m

Question No: 12 (Marks: 1) - Please choose one
The _____ is the old profession which is being eliminated because of computing.
► **Typist** ► Bank manager ► Operational manager ► All of the given options

Question No: 13 (Marks: 1) - Please choose one
The system that manages relational database, is called _____.
► None of the given options
► Database Management System
► Data Management System
► **Relational Database Management System**

Question No: 14 (Marks: 1) - Please choose one
When web server is busy it gives the following message to the user :
► Time out ► Waiting ► **Server busy** ► None of the given options

Question No: 15 (Marks: 1) - Please choose one
The group of technologies concerned with the capturing, processing and transmission of information in the digital electronic form is called _____.
► Telecom Engineering ► Computer Engineering
► Computer Science ► **Information Technology**

Question No: 16 (Marks: 1) - Please choose one
_____ team consists on the sharpest technical minds in the company.
► **Architecture** ► Business Development ► Configuration Management ► Developer

Question No: 17 (Marks: 1) - Please choose one
TCP stands for _____.
► Transfer Center protocol ► **Transmission Control Protocol**
► Transmission Center Protocol ► Telephone Center Protocol

Question No: 18 (Marks: 1) - Please choose one
A collection of data organized in such a way that the computer can quickly search for a desired data item is known as :
► Retrieving ► **Database** ► Information ► DBMS

Question No: 19 (Marks: 1) - Please choose one
Microsoft Word is a type of:
► System Software ► **Freeware Software** ► Shrink-Wrapped Software ► Custom-built Software

Question No: 20 (Marks: 1) - Please choose one
Users _____, how things work.
► Analyze in detail ► **Muddle through** ► Figure out ► Read in detail

Question No: 21 (Marks: 1) - Please choose one
Popular schemes used for reducing bytes for storage are:
► RGB and Color mapping ► RGB and Dithering
► RGB, Color mapping and Dithering ► **Color mapping and Dithering**

Question No: 22 (Marks: 1) - Please choose one
Hardware malfunctions is related to
► Data updates ► Data integrity ► Data security ► **Data accessibility**

Question No: 23 (Marks: 1) - Please choose one
If incorrectly we enter the negative age it is check by
► **Limit Integrity** ► Type Integrity ► Referential Integrity ► Physical Integrity

Question No: 24 (Marks: 1) - Please choose one
Which is the user-friendly way of presenting data ?
► Query ► Form ► **Report** ► All of the given options

Question No: 25 (Marks: 1) - Please choose one
Currently the BlueRay DVD can store more than _____ of data.
► 10 GB ► 100 GB ► **50 GB** ► 150 GB

Question No: 26 (Marks: 1) - Please choose one
In JavaScript, a || b is interpreted as

► a is true or b is false ► a is true and b is true
► a is false and b is true ► **a is true or b is true or both are true**

Question No: 27 (Marks: 1) - Please choose one

Speakers fall into the hardware category.
► True ► False

Question No: 28 (Marks: 1) - Please choose one
onBlur event is occurred for a form element when it _____

► Gets focus ► Losts focus ► Some thing is typed in ► onBlur is not an event

Question No: 29 (Marks: 1) - Please choose one
You can view a 3-D image on a _____.
► 3-D display ► 2-D display ► On both 2-D and 3-D displays ► We can not view a 3-D image

Question No: 30 (Marks: 1) - Please choose one
Module level design and unit testing is the responsibility of _____.
► Team Lead ► Developer ► Project Manager ► Quality Assurance Expert

FINALTERM EXAMINATION
CS101- Introduction to Computing (Session - 2)

Question No: 1 (Marks: 1) - Please choose one
What is NOT a key factor while designing a website?
► Usability ► User-friendly ► Consistency ► Complexity

Question No: 2 (Marks: 1) - Please choose one
Communications on the internet is controlled by a set of two protocols which are _____.
► IMAP and SMTP ► FTP and HTTP ► TCP and IP ► TCP and HTTP

Question No: 3 (Marks: 1) - Please choose one
A variable can be _____ in scope.
► Local ► Global ► Either local or global
► None of the given options

Question No: 4 (Marks: 1) - Please choose one
A protocol used for receiving email messages is called _____.
► URL ► Telnet ► POP3 ► SMTP

Question No: 5 (Marks: 1) - Please choose one
Aliasing problem can be managed by _____the size of pixels.
► Reducing ► Increasing ► Gaining ► Modifying

Question No: 6 (Marks: 1) - Please choose one
Serial arrangement in which things follow logical order or a recurrent pattern, such as statements executing one by one, is called _____.
► Loop ► Sequence ► Condition ► Array

Question No: 7 (Marks: 1) - Please choose one
Which of the following data types are recognized by JavaScript?
► Strings ► Numbers ► Undefined **► All of the given options**

Question No: 8 (Marks: 1) - Please choose one
a = Math.ceil(12.01)
What will be the value of a ?
► 12 **► 13** ► 12.0 ► 13.01

Question No: 9 (Marks: 1) - Please choose one
In the old days, databases did NOT support _____.
► Number ► Boolean **► Video** ► Text

Question No: 10 (Marks: 1) - Please choose one
The organizations are learning that business can be done in a more effective manner if emphasis is placed upon _____.
► Cooperation ► Shared responsibility ► Networking
► All of the given options

Question No: 11 (Marks: 1) - Please choose one
Module level design is the responsibility of the _____.
► Architect ► Team Lead **► Developer** ► CEO

Question No: 12 (Marks: 1) - Please choose one
_____ errors are caused by the code that somehow violates the rule of the language.
► Syntax ► Semantic ► Run time ► Load time

Question No: 13 (Marks: 1) - Please choose one
The world first computer program was written to compute:
► Simple sequence ► Multiple sequence
► Bernoulli's sequence ► Increasing sequence

Question No: 14 (Marks: 1) - Please choose one
Microsoft Word is a type of:
► System Software ► Freeware Software
► Shrink-Wrapped Software ► Custom-built Software

Question No: 15 (Marks: 1) - Please choose one
We need _____ for memory management in computer
► Software ► Hardware **► Operating System**
► Application Software

Question No: 16 (Marks: 1) - Please choose one
_____ is generally measured in terms of the number of steps required to execute an

algorithm.

► Space ► **Time** ► Memory and time ► Bandwidth

Question No: 17 (Marks: 1) - Please choose one

PowerBuilder falls in the category of _____.

► Assembly Languages ► **4-th Generation Languages**

► Machine Languages ► High-Level Languages

Question No: 18 (Marks: 1) - Please choose one

_____ means to break down into simpler components and analyze.

► Recursion ► **Parsing** ► Scope ► Navigation

Question No: 19 (Marks: 1) - Please choose one

```
for(var i=1; i<=2;i=i+1)
{
document.write( "Sorted Words:" + "<BR>" )
}
```

Which of the following shall be the output of above code:

►Sorted Words: Sorted Words: ►Sorted Words:Sorted Words:

►Sorted Words: “
” Sorted Words: “
”

**► Sorted Words:
 Sorted Words:
 (correct)**

Question No: 20 (Marks: 1) - Please choose one

Assembly languages allow a programmer to use _____ for numbers.

► Object ► Entity ► **Name** ► Interpreter

Question No: 21 (Marks: 1) - Please choose one

_____ means you have only one container to store more than one value in JavaScript.

► Variable ► Matrix ► **Array** ► String

Question No: 22 (Marks: 1) - Please choose one

Coding is the responsibility of _____

► Software design ► **Software developer** ► Project manager

► None of given

Question No: 23 (Marks: 1) - Please choose one

CEO stands for_____

► Central Executive officer ► Chief External officer

► **Chief executive officer** ► None of given

Question No: 24 (Marks: 1) - Please choose one

Decision Support Systems will become a bigger part of the professional life of the_____ .

► Doctors ► Mangers ► Marketers ► **All of above**

Question No: 25 (Marks: 1) - Please choose one

The output of fuzzy Logic System is computed by using _____Technique.

► MAX-MAX ► MAX-MIN **► MIN-MAX** ► None of the given

Question No: 26 (Marks: 1) - Please choose one


In the statement Math.PI, Math is _____ and PI is _____.

► Variable, Constant ► Object , Method

► Object , Function **► Object, Property**

FINALTERM EXAMINATION
CS101- Introduction to Computing (Session - 2)

Question No: 1 (Marks: 1) - Please choose one



It represents the _____ flow chart element.

► Process **► Input or Output** ► Decision ► Connector

Question No: 2 (Marks: 1) - Please choose one

Website design should NOT be _____.

► Unified **► Complex** ► Consistent ► Predictable

Question No: 3 (Marks: 1) - Please choose one

The most upper right pixel of the screen is of _____ color.

► Any ► Red ► Green ► Blue

Question No: 4 (Marks: 1) - Please choose one

Which of the following is NOT an example of Multi-user Operating system

► Windows ► Linux **► DOS** ► Solaris

Question No: 5 (Marks: 1) - Please choose one

According to the heuristic, the number of defects remaining in a system after a given level of tests is proportional to _____.

► The number found on very first day.

► The number found during the development.

► The number found during the test.

► None of the given options.

Question No: 6 (Marks: 1) - Please choose one
Which one of the following is NOT a component of Rule Based System?
► **Rule Compiler** ► Rule Interpreter ► Rules Base ► Working Memory

Question No: 7 (Marks: 1) - Please choose one
In RDBMS, table rows are called _____.
► Field ► **Record** ► Column ► Query

Question No: 8 (Marks: 1) - Please choose one
_____ can be used for entering, editing, or viewing data, one record at a time.
► Queries ► **Forms** ► Reports ► None of the given options

Question No: 9 (Marks: 1) - Please choose one
Tribal flood network is a _____ software.
► **DoS** ► Scanning ► Utility ► None of the given options

Question No: 10 (Marks: 1) - Please choose one
Unlike virus, _____ is a stand-alone program.
► **Trojan horse** ► Logic bomb ► Worm ► Time bomb

Question No: 11 (Marks: 1) - Please choose one
The key responsibilities of a project manager is _____.
► Planning and tracking of the project
► Arranging of the appropriate resources
► Client relationship management
► **All of the given options**

Question No: 12 (Marks: 1) - Please choose one
The key responsibilities of the architect of the project is_____.
► Technology selection
► High-level design
► Makes certain that the implementation remains true to the design
► **All of the given options**

Question No: 13 (Marks: 1) - Please choose one
_____ is responsible for day to day operations.
► CEO ► **COO** ► CMSO ► Developer

Question No: 14 (Marks: 1) - Please choose one
onAbort , onError are the _____ of the image object.
► **Event Handler** ► Properties ► Methods
► None of the given options

Question No: 15 (Marks: 1) - Please choose one
The tasks performed to detect the exact location of defect is called_____

► **Debugging** ► Testing ► Repairing ► Monitoring

Question No: 16 (Marks: 1) - Please choose one
_____ routes the packets through the internet to go to their destination.
► Protocol ► TCP ► **IP** ► NIC

Question No: 17 (Marks: 1) - Please choose one
When we buy a software package, we do not really buy it, we just by a license that allows us to use it, the _____stays with the maker.
► Agreement ► **Ownership** ► Membership ► Software

Question No: 18 (Marks: 1) - Please choose one
Sequence of steps that is taken to solve a problem is called _____.
► **Algorithm** ► Operating System ► Application software
► None of the given options

Question No: 19 (Marks: 1) - Please choose one
A collection of data organized in such a way that the computer can quickly search for a desired data item is known as :
► Retrieving ► **Database** ► Information ► DBMS

Question No: 20 (Marks: 1) - Please choose one
To start an ordered list from 20 instead of 1, we will write
► <OL begin = “20"> ► <OL initiate = “20">
► **<OL start = “20">** ► <OL from = “20">

Question No: 21 (Marks: 1) - Please choose one
_____ are personal computers that are designed to be easily transported and relocated.
► Desktops ► **Portables** ► Servers ► Workstations

Question No: 22 (Marks: 1) - Please choose one
To display a multi-line text area on the web page, we use ___ tag
► TEXT ► **TEXTAREA** ► INPUT ► INPUTAREA

Question No: 23 (Marks: 1) - Please choose one
The first component of an operating system that runs when a typical computer is turned ON, is:
► Device Manager ► File Manager ► **Loader** ► Device Driver

Question No: 24 (Marks: 1) - Please choose one
Pseudo code is written in
► **Complex grammar** ► Plain English ► JAVA ► Pseudo language

Question No: 25 (Marks: 1) - Please choose one
Instead of Full System, one can _____ results from part of a System
► **Not achieve** ► Mostly achieve ► Sometimes achieve ► Achieve

Question No: 26 (Marks: 1) - Please choose one
One can download or upload files to a remote computer using _____ protocol.
► HTTP ► SMTP **► FTP** ► TELNET

Question No: 27 (Marks: 1) - Please choose one
Which protocol is used to control other computer from our own computer ?
► FTP ► NNTP **► TELNET** ► None of the given choices

Question No: 28 (Marks: 1) - Please choose one
Which function returns a randomly selected floating point number between 0 and 1 ?
► floor(x) ► ceil(x) **► random()** ► round(x)

Question No: 29 (Marks: 1) - Please choose one
Global variables can make the logic of a web page.
► Difficult to understand
► Easier to understand and maintain
► Difficult to reuse and maintain
► Difficult to understand, reuse and maintain

Question No: 30 (Marks: 1) - Please choose one
Mathematical functions in JavaScript, are accessed by referring to various methods of the _____ object.
► Math ► Calculate ► Compute ► None of the given options

FINALTERM EXAMINATION
CS101- Introduction to Computing (Session - 2)

Question No: 1 (Marks: 1) - Please choose one
Human are better than computers at:
► Efficiency ► Accuracy **► Pattern recognition** ► None of the given choices

Question No: 2 (Marks: 1) - Please choose one
TCP stands for _____.
► Total communication protocol **► Transmission control protocol**
► Transfer control protocol ► Transfer collection protocol

Question No: 3 (Marks: 1) - Please choose one
First computer network was _____.
► NSFNET ► FIRSTNET **► ARPANET** ► ORPHANET

Question No: 4 (Marks: 1) - Please choose one
A user may access any item on the web through _____.
► URL ► Telnet ► POP ► SMTP

Question No: 5 (Marks: 1) - Please choose one
In JavaScript, a variable declaration is
► **Optional** ► Mandatory ► Not allowed ► None of the given

Question No: 6 (Marks: 1) - Please choose one
According to a popular heuristic, success is defined by _____.
► **The user** ► The builder ► Both user and builder
► None of the given options

Question No: 7 (Marks: 1) - Please choose one
To store rounded number of 8.6 in a variable called "r_number", we write _____.
► r_numbers=Maths.rounds(8.6) ► r_number=Math.rounds(8.6)
► **r_number=Math.round(8.6)** ► r_number=Maths.round(8.6)

Question No: 8 (Marks: 1) - Please choose one
random() function returns a randomly-selected, floating-point number between _____.
► **0 and 1** ► 0 and 10 ► 0 and -10 ► 0 and -1

Question No: 9 (Marks: 1) - Please choose one
Trinoo is a _____ software.
► **DoS** ► Scanning ► Utility ► None of the given options

Question No: 10 (Marks: 1) - Please choose one
Which attribute of the IMG tag tells us about the source of the image _____.
► source ► path ► loc ► **src**

Question No: 11 (Marks: 1) - Please choose one
The developer report to _____ in a development team.
► **Team Lead** ► Project Manager ► CEO ► IT Manager

Question No: 12 (Marks: 1) - Please choose one
The effective way not to only write programs but also it works properly and further more to minimize the time and the development cost of the program is called_____
► Programming Mechanism ► **Programming Methodology**
► Programming Synchronization ► None of the given options

Question No: 13 (Marks: 1) - Please choose one
TCP stands for _____.
► Transfer Center protocol ► **Transmission Control Protocol**
► Transmission Center Protocol ► Telephone Center Protocol

Question No: 14 (Marks: 1) - Please choose one
When we buy a software package, we do not really buy it, we just by a license that allows us to use it, the _____stays with the maker.
► Agreement ► **Ownership** ► Membership ► Software

Question No: 15 (Marks: 1) - Please choose one
Many developers write the _____ first and then incrementally convert each line into _____.
► Real code & Pseudo code ► **Pseudo code & Real code**
► Real code & Artificial code ► None of the given options

Question No: 16 (Marks: 1) - Please choose one
Collection of facts & figures is called _____.
► **Information** ► Data ► Entity ► Attribute

Question No: 17 (Marks: 1) - Please choose one
A collection of data organized in such a way that the computer can quickly search for a desired data item is known as :
► Retrieving ► **Database** ► Information ► DBMS

Question No: 18 (Marks: 1) - Please choose one
To start an ordered list from 20 instead of 1, we will write
► <OL begin = “20"> ► <OL initiate = “20">
► **<OL start = “20">** ► <OL from = “20">

Question No: 19 (Marks: 1) - Please choose one
Using COLSPAN, number of rows of the current cell should extend itself
► Upward ► **Downward**
► Both Upward and Downward ► None of the given choices

Question No: 20 (Marks: 1) - Please choose one
Microsoft Word is a type of:
► System Software ► **Freeware Software**
► Shrink-Wrapped Software ► Custom-built Software

Question No: 21 (Marks: 1) - Please choose one
Compound Statement after decision constructs in JavaScript is enclosed with
► ( ) ► [ ] ► { }; ► **{ }**

Question No: 22 (Marks: 1) - Please choose one
Users _____, how things work.
► Analyze in detail ► **Muddle through** ► Figure out ► Read in detail

Question No: 23 (Marks: 1) - Please choose one
One can send an email message to a remote computer using _____ protocol
► HTTP ► **SMTP** ► FTP ► TELNET

Question No: 24 (Marks: 1) - Please choose one
Writing a response, multiple statements are separated from each other with the help of
► **Period (.)** ► Comma (,) ► Colon (:) ► Semicolon (;)

Question No: 25 (Marks: 1) - Please choose one
With the passage of time the field of Computing and Telecommunication is _____.
► Diverging **► Converging** ► Becoming different ► Becoming unique

Question No: 26 (Marks: 1) - Please choose one
When we have to show value as part of a whole picture, which type of chart is used.
► Bar chart ► Pie chart ► Line graph **► None of the given**

Question No: 27 (Marks: 1) - Please choose one
_____ software directly interacts with the user.
► Application software ► System software
► Anonymous software ► Interactive software

Question No: 28 (Marks: 1) - Please choose one
Global variables can make the logic of a web page.
► Difficult to understand ► Easier to understand and maintain
► Difficult to reuse and maintain ► Difficult to understand, reuse and maintain

Question No: 29 (Marks: 1) - Please choose one
In partitioning of program/module, it should be assured that partitioned chunks should be as _____ as possible.
► Dependent **► Independent** ► Complex ► All of the above

FINALTERM EXAMINATION
CS101- Introduction to Computing (Session - 2)

Question No: 1 (Marks: 1) - Please choose one
The memory size of the Altair 8800 was
► 128 bytes ► 128 Kilo bytes ► 256 Kilo bytes **► 256 bytes**

Question No: 2 (Marks: 1) - Please choose one
A named collection of properties (data, state) and methods (instruction, behavior) is called _____.
► Array ► Function ► Variable **► Object**

Question No: 3 (Marks: 1) - Please choose one
JavaScript Variables are _____.
► Dynamically Typed ► Statically Typed ► Strong Typed
► None of the given options

Question No: 4 (Marks: 1) - Please choose one
Serial arrangement in which things follow logical order or a recurrent pattern, such as statements executing one by one, is called _____.

► Loop ► Sequence ► Condition **► Array**

Question No: 5 (Marks: 1) - Please choose one
Rule of thumb learned through trial and error is called _____.
► Design **► Heuristic** ► Plan ► Aim

Question No: 6 (Marks: 1) - Please choose one
According to heuristic, if you can't explain it in _____ minutes, either you don't understand it or it does not work.
► 10 ► 2 **► 5** ► 4

Question No: 7 (Marks: 1) - Please choose one
To store rounded number of 8.6 in a variable called "r_number", we write _____.
► r_numbers=Maths.rounds(8.6) ► r_number=Math.rounds(8.6)
► r_number=Math.round(8.6) ► r_number=Maths.round(8.6)

Question No: 8 (Marks: 1) - Please choose one
Using only HTML we can create
► Dynamic web pages **► Static web pages**
► Both Static and Dynamic pages ► None of these

Question No: 9 (Marks: 1) - Please choose one
_____ function returns the largest integer that is less than or equal to x.
► round(x) ► floor ► ceil ► abs(x)

Question No: 10 (Marks: 1) - Please choose one
Due to working at home, contact with the colleagues is _____, which may result in _____ quality of work
► Reduced, Poorer ► Reduced, Better ► Increased, Poorer **► Increased, Better**

Question No: 11 (Marks: 1) - Please choose one
The distance among families is _____ because of spending more time on internet.
► Increased ► Expanded ► Contracted ► Decreased

Question No: 12 (Marks: 1) - Please choose one
When web server is busy it gives the following message to the user :
► Time out ► Waiting **► Server busy** ► None of the given options

Question No: 13 (Marks: 1) - Please choose one
_____ is designed for detecting viruses and inoculating.
► Antivirus ► Utility ► Trojan ► None of the given choices

Question No: 14 (Marks: 1) - Please choose one
The _____ is becoming the preferred organizational structure for more and more organizations with the passage of time.

► Tree structured organizational model ► **Network paradigm**
► Hierarchical structure ► None of the given options

Question No: 15 (Marks: 1) - Please choose one
Planning and tracking of the project is the responsibility of the_____.
► **Project Manager** ► Architect ► Developer ► Chief Executive Officer

Question No: 16 (Marks: 1) - Please choose one
The responsibilities of the Team Lead includes_____.
► **Planning and tracking of the project**
► Detailed design
► Professional development of team members
► All of the given options

Question No: 17 (Marks: 1) - Please choose one
_____ team is responsible for a project after the specification's stage till the very end.
► Executive ► Architect ► **Development** ► HR

Question No: 18 (Marks: 1) - Please choose one
There are _____ types of errors.
► 2 ► **3** ► 4 ► 5

Question No: 19 (Marks: 1) - Please choose one
_____ are the computers that perform at or near the currently highest operational rate for computers.
► Minicomputers ► Microcomputers ► **Supercomputers** ► Personal Computers

Question No: 20 (Marks: 1) - Please choose one
Which one of these is NOT an example of storage devices?
► Tape ► **RAM** ► Floppy ► DVD

Question No: 21 (Marks: 1) - Please choose one
Forms can be submitted by using _____ different methods
► **2** ► 3 ► 4 ► 5

Question No: 22 (Marks: 1) - Please choose one
Which is NOT true for JavaScript variable name ?
► Student ► Roll_no_1111 ► For ► **schedule**

Question No: 23 (Marks: 1) - Please choose one
One can browse documents residing on a remote computer using _____ protocol.
► **HTTP** ► SMTP ► FTP ► TELNET

Question No: 24 (Marks: 1) - Please choose one
Which one is the example of spreadsheet software ?
► MS Word ► MS PowerPoint ► **MS Excel** ► MS Access

Question No: 25 (Marks: 1) - Please choose one
User can remotely log on to a computer and can have a control over it like a local user using
► TelNet Protocol
► **TelNet Protocol and connected to the user through TCP/IP network**
► TelNet protocol and FTP ► TCP/IP and FTP

Question No: 26 (Marks: 1) - Please choose one
Hardware malfunctions is related to
► Data updates ► Data integrity ► Data security ► **Data accessibility**

Question No: 27 (Marks: 1) - Please choose one
PowerBuilder falls in the category of _____.
► Assembly Languages ► 4-th Generation Languages
► Machine Languages ► **High-Level Languages**

Question No: 28 (Marks: 1) - Please choose one
Backbone is also called as _____.
► **vBNS** ► BNS ► vHBNS ► HBNS

Question No: 29 (Marks: 1) - Please choose one
Global variables can make the logic of a web page.
► **Difficult to understand** ► Easier to understand and maintain
► Difficult to reuse and maintain ► Difficult to understand, reuse and maintain

Question No: 30 (Marks: 1) - Please choose one
In JavaScript: In order to display the text on browser **Grade A**, which of following statement is True.
► documentwrite("Grade A") ► **document.write("Grade A");**
► document.write("Grade" && A"); ► document.write("Grade" && "A");

FINALTERM EXAMINATION
CS101- Introduction to Computing (Session - 3)

Question No: 1 (Marks: 1) - Please choose one
First computer network was _____.
► NSFNET ► FIRSTNET ► **ARPANET** ► ORPHANET

Question No: 2 (Marks: 1) - Please choose one
In a good presentation each slide should contain_____.

► **Heading** ► Phrases not sentences ► Sentences not phrases ► Heading, sentences not phrases

Question No: 3 (Marks: 1) - Please choose one

A function is also called _____.

► Sub-program ► Procedure ► Sub-routine **► All of the given option**

Question No: 4 (Marks: 1) - Please choose one

A single pixel can acquire approximately _____ color schemes.

► 1 million ► 2 million ► 10 million **► 16 million**

Question No: 5 (Marks: 1) - Please choose one

Which of the following is NOT a Loop statement?

► For ► While **► Switch** ► Do-While

Question No: 6 (Marks: 1) - Please choose one

Which one of the following is NOT a component of Rule Based System?

► Rule Compiler ► Rule Interpreter ► Rules Base ► Working Memory

Question No: 7 (Marks: 1) - Please choose one

Spread sheet is a type of _____.

► **Productivity software** ► Engineering software ► Mathematical software ► Business software

Question No: 8 (Marks: 1) - Please choose one

A combination of word processing and graphic design is

► Corel Draw **► Desktop Publishing** ► Paint ► WordPad

Question No: 9 (Marks: 1) - Please choose one

To store rounded number of 8.6 in a variable called "r_number", we write _____.

► r_numbers=Maths.rounds(8.6) ► r_number=Math.rounds(8.6)

► r_number=Math.round(8.6) ► r_number=Maths.round(8.6)

Question No: 10 (Marks: 1) - Please choose one

Which of the following is a true statement?

► Flat-file storage is better than tabular storage.

► Tabular storage is better than flat-file storage.

► Flat-file storage is better than relational storage.

► None of the given options

Question No: 11 (Marks: 1) - Please choose one

The political process is also influenced by the use of _____.

► Discussion forums ► Newsgroups ► Mailing lists

► All of the given options

Question No: 12 (Marks: 1) - Please choose one

The system that manages relational database, is called _____.

► **None of the given options**

► Database Management System

► Data Management System

► Relational Database Management System

Question No: 13 (Marks: 1) - Please choose one

_____ DBMS supports data in terabytes.

► Personal ► Desktop ► **Enterprise** ► Single-user

Question No: 14 (Marks: 1) - Please choose one

Trinoo is a _____ software.

► **DoS** ► Scanning ► Utility ► None of the given options

Question No: 15 (Marks: 1) - Please choose one

What is the major problem with flash based website?

► **Its two heavy** ► Cannot be indexed ► Less attractive ► Inaccessible

Question No: 16 (Marks: 1) - Please choose one

The organization is the collection of _____.

► **Peoples** ► Professionals ► Teams ► Individuals

Question No: 17 (Marks: 1) - Please choose one

The tasks performed to determine the existence of defects is called _____

► Debugging ► **Testing** ► Repairing ► Coding

Question No: 18 (Marks: 1) - Please choose one

Many developers write the _____ first and then incrementally convert each line into _____.

► Real code & Pseudo code ► **Pseudo code & Real code**

► Real code & Artificial code ► None of the given options

Question No: 19 (Marks: 1) - Please choose one

Forms can be submitted through _____ & _____ methods

► INCLUDE, POST ► INCLUDE, GET

► **GET, POST** ► SEND, POST

Question No: 20 (Marks: 1) - Please choose one

If an algorithm is syntactically correct, but semantically incorrect then this situation is

► Very good situation ► **Very dangerous situation**

► Not very bad ► Neutral situation

Question No: 21 (Marks: 1) - Please choose one

Heuristics _____ lead to the best results.

► Sometimes ► Do not ► Occasionally ► **Not always**

Question No: 22 (Marks: 1) - Please choose one

In TCPIP communication fragmentation is responsibility of

► TCP ► IP **► Both TCP and IP** ► Internet

Question No: 23 (Marks: 1) - Please choose one

Access to the internet became easy after the invention of

► WWW & Web Browsers

► Mainframes

► Binary system

► Signals

Question No: 24 (Marks: 1) - Please choose one

Which one is the example of spreadsheet software ?

► MS Word ► MS PowerPoint ► **MS Excel** ► MS Access

Question No: 25 (Marks: 1) - Please choose one

User can remotely log on to a computer and can have a control over it like a local user using

► TelNet Protocol

► TelNet Protocol and connected to the user through TCP/IP network

► TelNet protocol and FTP

► TCP/IP and FTP

Question No: 26 (Marks: 1) - Please choose one

If incorrectly we enter the negative age it is check by

► **Limit Integrity** ► Type Integrity ► Referential Integrity ► Physical Integrity

Question No: 27 (Marks: 1) - Please choose one

---------- is a digital programmable mechanical machine

► **Analytical Engine** ► Difference Engine ► Harvard Mark 1 ► Mechanical engine

Question No: 28 (Marks: 1) - Please choose one



This element of Flow Chart is called_____.

► Process **► Off page connector** ► Decision ► Connector

Question No: 29 (Marks: 1) - Please choose one

In a library's database, if there is an entry in the register for Book # 423 then the corresponding Book must actually exist; is an example of which type of data integrit

► Type integrity ► Limit integrity ►Physical Integrity **►Referential Integrity**

Question No: 30 (Marks: 1) - Please choose one

Ada is a programming language specifically designed for

► Analytical Engine ► Difference Engine ► Harvard Mark 1 ► Mechanical engine

FINALTERM EXAMINATION
CS101- Introduction to Computing (Session - 1)

Question No: 1 (Marks: 1) - Please choose one
Cray-1 was first commercial _____ computer
► **Super** ► Mini ► Micro ► Personal

Question No: 2 (Marks: 1) - Please choose one
The name of first browser was _____
► **Internet Explorer** ► Moziac ► Netscape ► Firefox

Question No: 3 (Marks: 1) - Please choose one
The impact of a digit in a number is determined by its ----------
► Value ► Location ► **Length** ► None of above

Question No: 4 (Marks: 1) - Please choose one
First computer network was _____.
► NSFNET ► FIRSTNET ► **ARPANET** ► ORPHANET

Question No: 5 (Marks: 1) - Please choose one
A variable can be _____ in scope.
► Local ► Global ► **Either local or global**
► None of the given options

Question No: 6 (Marks: 1) - Please choose one
_____ color should be used in background for a good presentation.

► Light ► **Dark** ► Red ► None of the given options

Question No: 7 (Marks: 1) - Please choose one
Which one of the following is not an event handler's attribute?

► Function ► Identifier ► Equal sign

► **String consisting of JavaScript statements**

Question No: 8 (Marks: 1) - Please choose one
Variables allow us to manipulate data through the _____.
► Actual Value ► Reference ► **Length** ► Name

Question No: 9 (Marks: 1) - Please choose one
Which one of the following is NOT a component of Rule Based System?
► Rule Compiler ► Rule Interpreter ► Rules Base ► **Working Memory**

Question No: 10 (Marks: 1) - Please choose one
Fuzzy logic is based on _____.

► Ground facts ► Experience ► Practice **► Approximation**

Question No: 11 (Marks: 1) - Please choose one
a = Math.ceil(12.01)
What will be the value of a ?
► 12 ► 13 ► 12.0 ► 13.01

Question No: 12 (Marks: 1) - Please choose one
Tag used to make a Text Bold is _____

► <BOLD></BOLD> **► <B></B>** ► <BODY></BODY> ► None of these

Question No: 13 (Marks: 1) - Please choose one
<P> </P> and
 tags are not same because

► goes to the next line
►
 goes to the next after next line
► <P></P> goes to the next after next line
► Both are same

Question No: 14 (Marks: 1) - Please choose one
Event handlers are placed in the _____ portion of a Web page as attributes in HTML tags.
► HEAD **► BODY** ► SCRIPT ► TITLE

Question No: 15 (Marks: 1) - Please choose one
Due to working at home, lack of interaction may result in _____ professional growth.
► Slower ► Faster ► Higher ► Improved

Question No: 16 (Marks: 1) - Please choose one
_____ DBMS supports data in terabytes.
► Personal ► Desktop **► Enterprise** ► Single-user

Question No: 17 (Marks: 1) - Please choose one
_____ waits for some time and then launch a function.
► Timeout( ) **► setTimeout( )** ► setTime( ) ► setTimeIn( )

Question No: 18 (Marks: 1) - Please choose one
The responsibilities of the Team Lead includes_____.
► Planning and tracking of the project
► Detailed design
► Professional development of team members
► All of the given options

Question No: 19 (Marks: 1) - Please choose one
_____ is also known as System Architecture
► High level system design
► Low level system design

► Every system design
► Software Requirement

Question No: 20 (Marks: 1) - Please choose one
The key property of the 'Array' object in JavaScript is
► Value ► **Length** ► Name
► All of the given choices

Question No: 21 (Marks: 1) - Please choose one
There are _____ ways of calling functions.
► One ► **Two** ► Three ► Four

Question No: 22 (Marks: 1) - Please choose one
Which event handler executes the specified JavaScript code when a window/form element loses focus ?
► **onBlur** ► onLoad ► onUnload ► onFocus

Question No: 23 (Marks: 1) - Please choose one
Popular schemes used for reducing bytes for storage are:
► RGB and Color mapping
► RGB and Dithering
► RGB, Color mapping and Dithering
► **Color mapping and Dithering**

Question No: 24 (Marks: 1) - Please choose one
Hardware malfunctions is related to
► Data updates ► **Data integrity** ► Data security ► Data accessibility

Question No: 25 (Marks: 1) - Please choose one
Users communicate with the computer using a consistent user interface provided by the OS. ► **True**
► False

Question No: 26 (Marks: 1) - Please choose one
Extension for saving web page is / are;
► ***.html** ► *.htm ► *.html and *.htm both are in use
► None of These

Question No: 27 (Marks: 1) - Please choose one
_____ loop is a flow control statement that allows code to be executed repeatedly based on a given Boolean condition.
► For ► Do-While ► **If-else** ► While

Question No: 28 (Marks: 1) - Please choose one
onBlur event is occurred for a form element when it _____

► **Gets focus** ► Losts focus

► Some thing is typed in ► onBlur is not an event

Question No: 29 (Marks: 1) - Please choose one

```
<script>
Number=new Array(5);
for(var i=1; i<=5 ; i=i+1)
{
        for( var k=6; k<=10; k=k+1)
        {
                Number[i]= k*i;
        }
}

</script>
```

For how many times the Nested For Loop shall execute;

► 20
► 15
► 25
► **Shall terminate in first loop.**

Question No: 30 (Marks: 1) - Please choose one

In JavaScript: In order to display the text on browser **Grade A**, which of following statement is True.

► documentwrite("Grade A") ► document.write("Grade A");
► document.write("Grade" && A"); ► **document.write("Grade" && "A");**

FINALTERM EXAMINATION
CS101- Introduction to Computing (Session - 4)

Question No: 1 (Marks: 1) - Please choose one

Success of a website is defined by _____.

►**Use**► Designer ► Developer ► Programmer

Question No: 2 (Marks: 1) - Please choose one

Which one is correct for JavaScript?

► **onMouseOver** ► OnMouseOver ► onmouseover ► All of the given

Question No: 3 (Marks: 1) - Please choose one

An indexed list of elements is called _____.

► Collection ► **Array** ► Set ► Group

Question No: 4 (Marks: 1) - Please choose one

_____ is the way that internet domain names are located and translated into IP addresses.

► FTP ► VoIP ►**DNS** ► TCP

Question No: 5 (Marks: 1) - Please choose one

The browser breaks down the URL into _____ parts.

► 2 ►**3** ► 4 ► 5

Question No: 6 (Marks: 1) - Please choose one

Which one of the following is not an event handler's attribute?

► Function ► Identifier ► Equal sign

► **String consisting of JavaScript statements**

Question No: 7 (Marks: 1) - Please choose one

JavaScript Variables are _____.

► **Dynamically Typed** ► Statically Typed

► Strong Typed ► None of the given options

Question No: 8 (Marks: 1) - Please choose one

Which of the following is NOT a Loop statement?

► For ► While ► **Switch** ► Do-While

Question No: 9 (Marks: 1) - Please choose one

According to a popular heuristic, success is defined by _____.

► **The user** ► The builder ► Both user and builder ► None of the given options

Question No: 10 (Marks: 1) - Please choose one

Which one of the following is an application for artificial intelligence?

► **Robotic** ► Web Agent ► Decision Support System ► All of the given options

Question No: 11 (Marks: 1) - Please choose one

Using only HTML we can create

► Dynamic web pages ►**Static web pages**

► Both Static and Dynamic pages

► None of these

Question No: 12 (Marks: 1) - Please choose one

The _____ is connected to all other modules of the microprocessor.

► **Control unit** ► Memory unit ► Floating Point unit ► Arithmetic and Logic unit

Question No: 13 (Marks: 1) - Please choose one
Which of the followings is NOT a Relational DBMS software.
► Access ► FrontPage ► FileMaker Pro ► **SQL Server**

Question No: 14 (Marks: 1) - Please choose one
country=”Hello Pakistan”;
document.write(country.length);
The out put of the above statement is _____.
► 12 ► 13 ► 14 ► **15**

Question No: 15 (Marks: 1) - Please choose one
The distance among families is _____ because of spending more time on internet.
► **Increased** ► Expanded ► Contracted ► Decreased

Question No: 16 (Marks: 1) - Please choose one
_____ is a field that uniquely identifies each record stored in a table.
► Composite Key ► **Primary key** ► Foreign key ► None of the given options

Question No: 17 (Marks: 1) - Please choose one
Planning and tracking of the project is the responsibility of the_____.
► Architect ► **Team Lead** ► Developer ► Chief Executive Officer

Question No: 18 (Marks: 1) - Please choose one
_____ has great PR skills.
► Architect ► Team Lead ► Project Manager ► **Chief Executive Officer**

Question No: 19 (Marks: 1) - Please choose one
_____ team is responsible for a project after the specification’s stage till the very end.
► Executive ► Architect ► **Development** ► HR

Question No: 20 (Marks: 1) - Please choose one
A large number of networks interconnected physically is called _____
► LAN ► **WAN** ► Internet ► Network collection

Question No: 21 (Marks: 1) - Please choose one
Efficiency is _____ to universality
► Equal ► **Direct proportional** ► Inversely proportional ► Not proportional

Question No: 22 (Marks: 1) - Please choose one
There are _____ ways of calling functions.
► One ► **Two** ► Three ► Four

Question No: 23 (Marks: 1) - Please choose one
Which protocol is use to transfer a file over the network?
► UDP ► **FTP** ► TCP ► OSI

Question No: 24 (Marks: 1) - Please choose one
Writing a response, multiple statements are separated from each other with the help of
► **Period (.)** ► Comma (,) ► Colon (:) ► Semicolon (;)

Question No: 25 (Marks: 1) - Please choose one
Popular schemes used for reducing bytes for storage are:
► RGB and Color mapping ► RGB and Dithering
► RGB, Color mapping and Dithering ► **Color mapping and Dithering**

Question No: 26 (Marks: 1) - Please choose one
_____ has the ability to automate and simplify daily tasks.
► Productivity software ► **Application software**
► System software ► Graphical software

Question No: 27 (Marks: 1) - Please choose one
Which representation technique of algorithm is more suitable for developer to make actual code_____.

► **pseudo code** ► flow chart ► both pseudo code and flow chart ► Heuristics

Question No: 28 (Marks: 1) - Please choose one
_____ is used to terminate all JavaScript statements.
► Colon ► **Semicolon** ► Underscore ► Apostrophe

Question No: 29 (Marks: 1) - Please choose one
CONCATENATE operator is used to_____ elements.

► Subtract ► Multiply ► **Join** ► Add

Question No: 30 (Marks: 1) - Please choose one
In partitioning of program/module, it should be assured that partitioned chunks should be as _____ as possible.
► Dependent ► **Independent** ► Complex ► All of the abov

FINALTERM EXAMINATION
CS101- Introduction to Computing (Session - 3)

Question No: 1 (Marks: 1) - Please choose one
The memory size of the Altair 8800 was
► 128 bytes ► 128 Kilo bytes ► **256 Kilo bytes** ► 256 bytes

Question No: 2 (Marks: 1) - Please choose one
Hexadecimal number system is based on ---------- digits
► 2 ► 8 ► 12 **► 16**

Question No: 3 (Marks: 1) - Please choose one
Which one of the following is not an event handler's attribute?

► Function ► Identifier ► Equal sign

► String consisting of JavaScript statements

Question No: 4 (Marks: 1) - Please choose one
Which is correct?

► onUnload ► onUnLoad ► onUNLOAD ► All of the above

Question No: 5 (Marks: 1) - Please choose one
The most upper right pixel of the screen is of _____ color.
► Any ► Red ► Green ► Blue

Question No: 6 (Marks: 1) - Please choose one
Which of the following is NOT a Loop statement?
► For ► While **► Switch** ► Do-While

Question No: 7 (Marks: 1) - Please choose one
When'+' operator is used with string operands, it _____ both strings.
► Adds ► Subtracts ► Concatenates ► Compares

Question No: 8 (Marks: 1) - Please choose one
_____ organization is replacing the old-style layered, tree-structured organizational model.
► Network ► Hierarchical ► Matrix **► None of the given options**

Question No: 9 (Marks: 1) - Please choose one
Due to working at home, lack of interaction may result in _____ professional growth.
Slower Faster Higher Improved

Question No: 10 (Marks: 1) - Please choose one
Spies of one business monitoring the network traffic of their competitors' _____.
Industrial Intelligence Industrial Espionage Industrial Spying Industrial Surveillance

Question No: 11 (Marks: 1) - Please choose one
The key responsibilities of a project manager is _____.

Planning and tracking of the project Arranging of the appropriate resources
Client relationship management **All of the given options**

Question No: 12 (Marks: 1) - Please choose one
Sequence of steps that is taken to solve a problem is called _____.

Algorithm Operating System Application software None of the given options

Question No: 13 (Marks: 1) - Please choose one
CELLPADDING determines the distance between the _____ of the cell and the contents of the cell
Caption **Border** Alignment Empty space

Question No: 14 (Marks: 1) - Please choose one
DSS stands for:
Dual System Security Decision Support System Digital System Solver **Dynamic System Security**

Question No: 15 (Marks: 1) - Please choose one
Flow control constructs in JavaScript includes:
If-Else Loops and If -Else **Switch and If-Else** All of the given choices

Question No: 16 (Marks: 1) - Please choose one
Assignment operator in JavaScript is represented by:
= = = => >=

Question No: 17 (Marks: 1) - Please choose one
In a System having many parts to be designed, one should always do the _____ first
Hard part Simple part Development part Quality part

Question No: 18 (Marks: 1) - Please choose one
Which protocol is used to send email ?
FTP **SMTP** TELNET All of the given choices

Question No: 19 (Marks: 1) - Please choose one
Those Systems are “Intelligent System” that mimics some aspects of
Software deployment **Human thought** Speaking power Computing

Question No: 20 (Marks: 1) - Please choose one

```
<script>
Number=new Array(5);for(var i=1; i<=5 ; i=i+1)
{
        for( var k=6; k<=10; k=k+1)
         {
                    Number[i]= k*i;
```

```
        }
}
```

</script>

For how many times the Nested For Loop shall execute;

20 15 25 **Shall terminate in first loop.**

Question No: 21 (Marks: 1) - Please choose one

Which of the following is a valid html tag?

► <html> ► <HTML> ► <htML> **► All of the above**

Question No: 22 (Marks: 1) - Please choose one

Which of the following memory retains its information when the power to the system is turned off?

► RAM **► ROM** ► DIMM ► DRAM

Question No: 23 (Marks: 1) - Please choose one

The output of **document.write("2" + Math.PI) ; is_____.**

► 23.141592653589793 ► 3.146 ► 2.3141592653589793 **► None of them**

Question No: 24 (Marks: 1) - Please choose one

Logic Bombs executes its payload when _____

► A programs run
► A predetermined event occurs
► DoS attack is launched
► A file is copied from one folder to another

Question No: 25 (Marks: 1) - Please choose one

Which Internet Service is comparatively Slow but Inexpensive and Fast.

► E-mail ► Instant Messaging ► Web ► None of the given

Question No: 26 (Marks: 1) - Please choose one

Super computers consists of more than one parallel processors because

► One big processor is more expensive than parallel processors
► Through parallel processors problems can be solved easily
► Small processors are easy to manufacture
► All of the given

Question No: 1 (Marks: 1) - Please choose one
A procedure that usually, but not always, works or that gives nearly the right answer is called
► Algorithm ► Logarithm **► Heuristic** ► Methodology

Question No: 2 (Marks: 1) - Please choose one
Which of the following is NOT an Application Software?

► Word Processor ► Web Browser **► Windows XP** ► MS Excel

Question No: 3 (Marks: 1) - Please choose one
Operating System talks to and manages devices through
► Loader ► File Manager ► Memory Manager **► Device Driver**

Question No: 4 (Marks: 1) - Please choose one
You can _____ from/to a website containing interactive forms.
► Only read ► Only write **► Read and write** ► Not read and write

Question No: 5 (Marks: 1) - Please choose one
When the user needs something to be done by the computer, he/she gives instructions in the form of _____ to computer ____
► Software, Hardware ► Hardware, Software
► System Software, Application Software ► Graph, Monitor

Question No: 6 (Marks: 1) - Please choose one
There is a battery on the motherboard to:
► Give power to the processor **► Save information when computer is off**
► Save information when computer is on ► Give power to the motherboard

Question No: 7 (Marks: 1) - Please choose one
_____ is simply a fast port that lets you connect computer peripherals and consumer electronics to your computer without restart.
► Freeware ► Shareware **► Firewire** ► Firmware

Question No: 8 (Marks: 1) - Please choose one
Which one is correct?

► <BODY></BODY> ► <body></body>
► Both <BODY></BODY> and <body></body> ► <BODY/>

Question No: 9 (Marks: 1) - Please choose one
The weaknesses of the computer are:
► Pattern recognition & Storage ► Speed & Innovative ideas
► Pattern recognition & Innovative ideas ► Speed & Storage

Question No: 10 (Marks: 1) - Please choose one
The key strengths of computers are
► Speed ► Storage ► Do not get bored **► All of the given choices**

Question No: 11 (Marks: 1) - Please choose one
Which one is correct?

► <HEAD> </HEAD> ► <HEAD> <END>
► <HEAD> </END> ► <HEAD> <\HEAD>

Question No: 12 (Marks: 1) - Please choose one
Everything that JavaScript manipulates is treated as:
► Object ► Window ► Text ► Script

Question No: 13 (Marks: 1) - Please choose one
A process in which user's browser check the form's data is called
► Server-Side Scripting **► Client-Side Scripting**
► Bowser Scripting ► Form Scripting

Question No: 14 (Marks: 1) - Please choose one
---------- is volatile memory
► RAM ► ROM ► Hard Disk ► CD ROM

Question No: 15 (Marks: 1) - Please choose one
WYSIWYG stands for
► What you say is what you get ► Where you see is where you go
► What you see is what you get ► When you see is when you get

Question No: 16 (Marks: 1) - Please choose one
What is/are the use/uses of Word processor?
► To write a letter ► To write Research paper or report
► To create address labels **► All of the given**

Question No: 17 (Marks: 1) - Please choose one
_____ is the example of Shrink-wrapped software
► PIA information system ► WinZip trial pack ► Linux **► MS Word**

Question No: 18 (Marks: 1) - Please choose one
_____ interacts directly with the computer Hardware
► Compiler **► Operating system** ► Application software ► Assembler

Question No: 19 (Marks: 1) - Please choose one

Which of the following symbol is used for multiple line comments in JavaScript?

► / ► // ► /* ► //*

Question No: 20 (Marks: 1) - Please choose one

Consider the following statement written in JavaScript:
str = ”Hello” + ” World”

What will be the value of str ?

► **HelloWorld** ► Hello World ► Hello + World ► It will result in error

Question No: 21 (Marks: 1) - Please choose one

_____ give us the ability to manipulate data through reference instead of actual value.

► **Constants** ► **Variables** ► Data Types ► Operators

Question No: 22 (Marks: 1) - Please choose one

Bringing subsystems together to form the system is called

► **Integration** ► Merging ► Splitting ► Operation & Maintenance

Question No: 23 (Marks: 1) - Please choose one

Preliminary exploration of possible solutions, technologies, suppliers is called

► Viability ► **Feasibility** ► Specification ► Integration

Question No: 24 (Marks: 1) - Please choose one

Algorithm gives us:

► Definition of a problem ► **Sequence of steps to solve a problem**
► Proper understanding of a problem ► Solution to a problem

Question No: 25 (Marks: 1) - Please choose one

Web site is collection of related _____

► Web pages ► **Information** ► Search Engines ► None of the given choices

Question No: 26 (Marks: 1) - Please choose one

Information on World Wide Web is _____ unified.

► Physically ► **Logically** ► Really ► None of the given choices

Question No: 1 (Marks: 1) - Please choose one
Which function returns a randomly selected floating point number between 0 and 1 ?
► floor(x) ► ceil(x) **► random()** ► round(x)

Question No: 2 (Marks: 1) - Please choose one
Functions are also called:
► Heuristics ► Variables ► Arrays **► Subprograms**

Question No: 3 (Marks: 1) - Please choose one
In JavaScript, each element of array can store data of type
► A Number ► An Array ► A String variable **► All of the given choices**

Question No: 4 (Marks: 1) - Please choose one
The weaknesses of the computer are:
► Pattern recognition & Storage ► Speed & Innovative ideas
► Pattern recognition & Innovative ideas ► Speed & Storage

Question No: 5 (Marks: 1) - Please choose one
Processed data is called _____.
► Information ► Data ► Entity ► Attribute

Question No: 6 (Marks: 1) - Please choose one
Many developers write the _____ first and then incrementally convert each line into _____.
► Real code & Pseudo code **► Pseudo code & Real code**
► Real code & Artificial code ► **None of the given options**

Question No: 7 (Marks: 1) - Please choose one
When we buy a software package, we do not really buy it, we just by a license that allows us to use it, the _____stays with the maker.
► Agreement **► Ownership** ► Membership ► Software

Question No: 8 (Marks: 1) - Please choose one
Name, Border, Source are the _____ of the image object.
► Event Handler **► Properties** ► Methods ► None of the given options

Question No: 9 (Marks: 1) - Please choose one
Using smart editors they can automatically color different parts of statements in different colors e.g. HTML tags in _____ color.
► Green ► Grey **► Blue** ► None of the given options

Question No: 10 (Marks: 1) - Please choose one
_____ is in Executive team.
► Project Manager ► CEO ► Team Lead ► Developer

Question No: 11 (Marks: 1) - Please choose one
Module level design and unit testing the responsibility of _____.
► Team Lead **► Developer** ► Project Manager ► Quality Assurance Expert

Question No: 12 (Marks: 1) - Please choose one
_____ team is responsible for a project after the specification's stage till the very end.
► Executive ► Architect **► Development** ► HR

Question No: 13 (Marks: 1) - Please choose one
_____ waits for some time and then launch a function.
► Timeout( ) **► setTimeout( )** ► setTime( ) ► setTimeIn( )

Question No: 14 (Marks: 1) - Please choose one
Which of the following is NOT an event handler for image object?
► onAbort ► onError ► onLoad **► onUser**

Question No: 15 (Marks: 1) - Please choose one
_____ is a field that uniquely identifies each record stored in a table.
► Composite Key ► **Primary key** ► Foreign key ► None of the given options

Question No: 16 (Marks: 1) - Please choose one
Distance learning has got a boost due to the _____.
► Easy communication ► Online interactive contents ► Flexibility
► All of the given options

Question No: 17 (Marks: 1) - Please choose one
By default in a web page Hyper Link for another web page is represented as _____

► Blue only ► Black and Underlined ► Blue and Bold **► Blue and Underlined**

Question No: 18 (Marks: 1) - Please choose one
To store rounded number of 8.6 in a variable called "r_number", we write _____.
► r_number=Maths.round(8.6) ► r_numbers=Maths.rounds(8.6)
► r_number=Math.rounds(8.6) **► r_number=Math.round(8.6)**

Question No: 19 (Marks: 1) - Please choose one
Which one is the best option for designing a Medical Expert System?
► Rule Based System ► Genetic Algorithm ► Fuzzy Logic ► Neural Network

Question No: 20 (Marks: 1) - Please choose one
Variables allow us to manipulate data through the _____.
► Actual Value **► Reference** ► Length ► Name

Question No: 21 (Marks: 1) - Please choose one
Which is correct?

► onUnload ► onUnLoad ► onUNLOAD ► All of the above

Question No: 22 (Marks: 1) - Please choose one
Capturing events and responding to them is called _____.

► Function Handling **► Event Handling** ► Event Procedure ► All of the given option

Question No: 23 (Marks: 1) - Please choose one
_____ color should be used in background for a good presentation.

► Light **► Dark** ► Red ► None of the given options

Question No: 24 (Marks: 1) - Please choose one
Which of the following symbol is used for multiple line comments in JavaScript?

► / ► // **► /*** ► //*

Question No: 25 (Marks: 1) - Please choose one
In JavaScript, what will be the result of the follwoing operation
79%3

► 0 ► 1 ► 2 ► 3

Question No: 26 (Marks: 1) - Please choose one
A new cell using HTML is added in table row by
► <TC>…</TC> ► <TR>…</TR>
► <TD>…</TD> ► <NC>…</NC>

Question No: 27 (Marks: 1) - Please choose one
TCP stands for _____.
► Total communication protocol ► Transmission control protocol
► Transfer control protocol ► Transfer collection protocol

Question No: 28 (Marks: 1) - Please choose one
What is NOT a key factor while designing a website?
► Usability ► User-friendly ► Consistency ► Complexity

Question No: 29 (Marks: 1) - Please choose one
It represents the _____ flow chart element.

► Process ► Input or Output ► Decision ► Connector

Question No: 30 (Marks: 1) - Please choose one
Vacuum tubes were replaced by ___
► Punch cards ► Transistors ► Micro Processors ► Resistors

FINALTERM EXAMINATION
Spring 2009 Final
CS101- Introduction to Computing (Session - 2)

The transistor is a solid state semiconductor device used for amplification and switching, and has __three_____ terminals.
► one ► two ► three ► four

Question No: 2 (Marks: 1) - Please choose one
Blue Pacific is a name of ____Super__ computer.
► Mini ► Desktop ► Micro ► Super

Question No: 3 (Marks: 1) - Please choose one
Monte Carlo algorithm is an example of Randomized algorithm
► Randomized algorithm ► Greedy algorithm

► both greedy and randomized ► Heuristics

Question No: 4 (Marks: 1) - Please choose one
A set of stand alone productivity applications designed to work together known as __ Productivity software suites .

► **Productivity software suites** ► Compiled software
► Secure software ► Intelligent software

Question No: 5 (Marks: 1) - Please choose one
The most used form tag is the <input> tag. - False
► True ► **False**

Question No: 6 (Marks: 1) - Please choose one
What is the key feature of computer which is against human nature.?
Can't get bored.

► **Can't get bored**. ► Pattern recognition ► Repetition ► None

Question No: 7 (Marks: 1) - Please choose one
___ Word Processor Software __ was designed as a replacement for typewriter
► Spreadsheet Software ► **Word Processor Software**
► Presentation Software ► Database Software

Question No: 8 (Marks: 1) - Please choose one
Forms can be submitted by using _____2____ different methods
► **2** ► 3 ► 4 ► 5

Question No: 9 (Marks: 1) - Please choose one
To display a checkbox on the web page, we use __INPUT_ tag
► CHECKBOX ► CHECK ► **INPUT** ► INPUTBOX

Question No: 10 (Marks: 1) - Please choose one
_Name __ attribute of FORM tag is used to mention a URL when the form is being submitted
► **name** ► action ► method ► submit

Question No: 11 (Marks: 1) - Please choose one
You can __ _____ from/to a website containing interactive forms.
► Only read ► Only write ► **Read and write** ► Not read and write

Question No: 12 (Marks: 1) - Please choose one
Using COLSPAN, number of rows of the current cell should extend itself None of the given choices
► Upward ► **Downward**

► Both Upward and Downward ► None of the given choices

Question No: 13 (Marks: 1) - Please choose one
ASCII WHITE is the fastest Super computer which can perform _1.3 trillion__ calculations in one second.

► 1.3 billion ► **1.3 trillion** ► 1.3 miillion ► 1.3 thousand

Question No: 14 (Marks: 1) - Please choose one
_HTML___ is a related collection of WWW files that includes a beginning file called a homepage
► **HTML** ► Website ► HTTP ► Web page

Question No: 15 (Marks: 1) - Please choose one
If a computer could pass the Turing test then it would be able to: think like human beings
► **think like human beings** ► do the things faster

► win a million dollar prize► store more information

Question No: 16 (Marks: 1) - Please choose one
The key strengths of computers are - Speed
► Speed ► Storage ► Do not get bored ► **All of the given choices**

Question No: 17 (Marks: 1) - Please choose one
Compared to vacuum tubes, Transistors offer: All of the given choices
► Much smaller size ► Better reliability

► Much lower cost ► **All of the given choices**

Question No: 18 (Marks: 1) - Please choose one
Which of the following is NOT a component of IC? Resistors
► Transistors ► Diodes ► **Resistors** ► Vacuum tubes

Question No: 19 (Marks: 1) - Please choose one
When we use <INPUT type="password">, what will happen? - Text will be in **** format

► Text will not be visible ► Text will be in normal format

► **Text will be in **** format** ► Text will be in #### format

Question No: 20 (Marks: 1) - Please choose one
Spread sheet is a type of _ Mathematical software _____.
► Productivity software ► Engineering software
► **Mathematical software** ► Business software

Question No: 21 (Marks: 1) - Please choose one
Word Processor is a ____ Application Software__
► System Software ► **Application Software** ► Device ► Utility

Question No: 22 (Marks: 1) - Please choose one
_ Utility Program refers to the firmware code which is run by an IBM compatible PC when first powered on.
► DOS ► BIOS ► **Utility Program** ► None of these

Question No: 23 (Marks: 1) - Please choose one
A computer program that facilitates the communication between the computer and a peripheral device is called____ Language Translator _____
► Operating system ► Utilities ► **Language Translator** ► Device Drives

Question No: 24 (Marks: 1) - Please choose one
In JavaScript, what will be the result of the following operation 79%3
► 0 ► 1 ► 2 ► **3**

Question No: 25 (Marks: 1) - Please choose one
Which of the following number system is used by microprocessor? Binary
► **Binary** ► Decimal ► Octal ► Hexadecimal

Question No: 26 (Marks: 1) - Please choose one
Web site is collection of related ___ Information___
► Web pages ►**Information** ► Search Engines ► None of the given choices

Moaaz.pk@gmail.com

CS101 Introduction to Computing FINAL TERM PAPERS

Final TERM EXAMINATION Spring 2010
Final CS101- Introduction to Computing
(Session - 2

vulmshelp.com

Question No: 1 (Marks: 1) - Please choose one

Humans are better than computers at:

► Efficiency

► Accuracy

► **Pattern recognition**

► None of the given choices

Question No: 2 (Marks: 1) - Please choose one

Cray-1 was first commercial _____ computer

► **Super**

► Mini

► Micro

► Personal

Question No: 3 (Marks: 1) - Please choose one

URL is a/an _____

► Device

► Component

► **Address**

► Tool

Question No: 4 (Marks: 1) - Please choose one
Mainframe Computers are also called _____

- ► **Enterprise Servers**
- ► Personal Servers
- ► Enterprise Managers
- ► Window Servers

Question No: 5 (Marks: 1) - Please choose one Which of the following is NOT a category of Mobile Computers?

- ► Laptop
- ► Palmtop
- ► **Desktop**
- ► Wearable

Question No: 6 (Marks: 1) - Please choose one Preliminary exploration of possible solutions, technologies, suppliers is called

- ► Viability
- ► **Feasibility**
- ► Specification
- ► Integration

Question No: 7 (Marks: 1) - Please choose one _____ give us the ability to manipulate data through reference instead of actual value.

- ► Constants
- ► **Variables**
- ► Data Types
- ► Operators

Question No: 8 (Marks: 1) - Please choose one
Consider the following statement written in JavaScript:

str = ”Hello” + ”
World” What will be the value of str ?

- ► **HelloWorld**
- ► Hello World
- ► Hello + World
- ► It will result in error

Question No: 9 (Marks: 1) - Please choose one
A tool that helps you to find the synonyms is called _____.

► Language
► Paragraph

► **Thesaurus**
► Symbol

Question No: 10 (Marks: 1) - Please choose one Communication protocol is a _____that governs the flow of information over a network

► Set of protocols
► **Set of rules**
► Device
► Set of methods

Question No: 11 (Marks: 1) - Please choose one If a computer could pass the Turing test then it would be able to:

► **think like human beings**
► do the things faster
► win a million dollar prize
► store more information

Question No: 12 (Marks: 1) - Please choose one The first Web browser with a GUI was generally available in:

► 1992
► **1993**
► 1994
► 1995

Question No: 13 (Marks: 1) - Please choose one
Web is a unique invention by humans in terms that it is:

► accessible to only the owners who control it

► accessible from particular locations only

► accessible to all humans

► accessible to only the educational institutes

Question No: 14 (Marks: 1) - Please choose one

In this URL http://www.msn.com , _____identifies the domain name

► http

► www

► msn

► com

Question No: 15 (Marks: 1) - Please choose one _____ is simply a fast port that lets you connect computer peripherals and consumer electronics to your computer without restart.

► Freeware

► Shareware

► Firewire

► Firmware

Question No: 16 (Marks: 1) - Please choose one Which of the following is NOT supported by PC's power supply.

► -12 and +12 V DC

► -10 and +10 V DC

► -5 and + 5 V DC

► All are supported

Question No: 17 (Marks: 1) - Please choose one In which case Cache Memory is used

► To increase RAM speed

► To overcome BUS speed

► To overcome Speed rate between RAM and CPU

► To overcome CPU speed

Question No: 18 (Marks: 1) - Please choose one To display a single line text area on the web page, we use ___ tag

► TEXT

► TEXTBOX
► **INPUT** ► INPUTBOX

Question No: 19 (Marks: 1) - Please choose one If an algorithm is syntactically correct, but semantically incorrect then this situation is

► Very good situation

► **Very dangerous situation**

► Not very bad

► Neutral situation

Question No: 20 (Marks: 1) - Please choose one

Users communicate with the computer using a consistent user interface provided by the OS.

► **True**

► False

Question No: 21 (Marks: 1) - Please choose one

Application developers do not need to know much about the HW, especially the microProcessor, while they are developing their application.

► **True**

► False

Question No: 22 (Marks: 1) - Please choose one

The first spreadsheet program was invented by

► Charles Babbage

► **Dan Bricklin**

► Paul Graham

► John von Neumann

Question No: 23 (Marks: 1) - Please choose one Which representation technique of algorithm is more suitable for developer to make actual code_____.

► **pseudo code**

► flow chart

► both pseudocode and flowchart

► Heuristics

Question No: 24 (Marks: 1) - Please choose one
_____ is used to terminate all JavaScript statements.

► Colon ► **Semicolon** ► Underscore ► Apostrophe

Question No: 25 (Marks: 1) - Please choose one In javascript cookies can be created for future use_____.

► Easily

► No facility at all

► This is not possible without Java language.

► **Cookies are files so java script can not handle it.**

Question No: 26 (Marks: 1) - Please choose one When the microprocessor desires to look at a piece of data, it checks in the _____ first.

► RAM ► ROM ► hard disk

► **cache**

Question No: 1 (Marks: 1) - Please choose one Using Java Script you can write a character at random location on screen

► By applying randomCh() method

► With the help of String object

► With the help of random character property

► There is no built in approach in Javascript

Question No: 2 (Marks: 1) - Please choose one If incorrectly we enter the negative age it is check by

► **Limit Integrity**

► Type Integrity ► Referential Integrity ► Physical Integrity

Question No: 3 (Marks: 1) - Please choose one The Encryption of data is related to

► Data updates

► **Data security**

► Data integrity ► Data accessibility

Question No: 4 (Marks: 1) - Please choose one
Which protocol is used to transfer a file over the network ?

► UDP

► **FTP**

► TCP

► OSI

Question No: 5 (Marks: 1) - Please choose one One can send an email message to a remote computer using _____ protocol

► HTTP

► **SMTP**

► FTP

► TELNET

Question No: 6 (Marks: 1) - Please choose one In a System having many parts to be designed, one should always do the _____ first

► **Hard part**

► Simple part ► Development part ► Quality part

Question No: 7 (Marks: 1) - Please choose one Flow control constructs in JavaScript includes:

► If-Else ►

Loops and If -Else

► **Switch and If-Else**

► All of the given choices

Question No: 8 (Marks: 1) - Please choose one ___ provides a simple, consistent way for applications to interact with the HW without having to know all the details of the HW

► Explorer.exe

► **System Files**

► Operating System Application Software

Question No: 9 (Marks: 1) - Please choose one Machine language is also called

► Assembly Language

► **Binary Language**

► High Level Language

► HTML Language

Question No: 10 (Marks: 1) - Please choose one _____ is the best known builder for supercomputers.

► Sun

► **Cray Research**

► Microsoft ► Apple

Question No: 11 (Marks: 1) - Please choose one The weaknesses of the computer are:

► Pattern recognition & Storage

► Speed & Innovative ideas

► **Pattern recognition & Innovative ideas**

► Speed & Storage

Question No: 12 (Marks: 1) - Please choose one Communication protocol is a _____that governs the flow of information over a network

► Set of methods ► Set of protocols

► **Set of rules**

► Device

Question No: 13 (Marks: 1) - Please choose one _____ team is responsible for the maintenance, expansion , improvement of the infrastructure consisting of workstations,

networking equipment, software and network security.

► Support ► Configuration Management ► Quality Assurance

► **Developer**

Question No: 14 (Marks: 1) - Please choose one _____ team consists of the sharpest technical minds in the company.

► **Architecture**

► Business Development

► Configuration Management ► Developer

Question No: 15 (Marks: 1) - Please choose one

_____ is responsible for day to day operations.

► CEO

► **COO**

► CMSO ► Developer

Question No: 16 (Marks: 1) - Please choose one One of the key responsibilities of the _____ is client relationship management.

► **Project Manager** ► Team Lead ► Developer ► Quality Assurance Engineer

Question No: 17 (Marks: 1) - Please choose one What is the major problem with flash based website?

► **Its two heavy** ► Cannot be indexed ► Less attractive ► Inaccessible

Question No: 18 (Marks: 1) - Please choose one Which of the following is NOT an event handler for image object?

► onAbort ► onError ► onLoad ► onUser

Question No: 19 (Marks: 1) - Please choose one

The organizations are learning that business can be done in a more effective manner if emphasis is placed upon _____.

► Cooperation ► **Shared responsibility** ► Networking ► All of the given

options

Question No: 1 (Marks: 1) - Please choose one

It represents the _____ flow chart element.

► Flow Line ► Connector ► Off-page connector

► **Start or Stop**

Question No: 2 (Marks: 1) - Please choose one

What is NOT a key factor while designing a website?

► Usability ► User-friendly ► Consistency ► **Complexity**

Question No: 3 (Marks: 1) - Please choose one

_____

_% of the users have left websites in frustration due to poor navigation.

► 40 ► 62

► **83**

► 91

Question No: 4 (Marks: 1) - Please choose one

In JavaScript, a variable declaration is

► **Optional** ► Mandatory ► Not allowed ► None of the given

Question No: 5 (Marks: 1) - Please choose one

A protocol used for receiving email messages is called _____.

► URL ► Telnet ► **POP3** ► SMTP

Question No: 6 (Marks: 1) - Please choose

one

Which is correct?

► **onUnload** ► onUnLoad ► onUNLOAD ► All of the above

Question No: 7 (Marks: 1) - Please choose one

Serial arrangement in which things follow logical order or a recurrent pattern, such as statements executing one by one, is called _____.

► **Loop** ► Sequence ► Condition ► Array

Question No: 8 (Marks: 1) - Please choose one

Variables allow us to manipulate data through the _____.

► Actual Value ► **Reference** ► Length ► Name

Question No: 9 (Marks: 1) - Please choose one

Fuzzy logic is based on _____.

► Ground facts ► Experience ► Practice ► **Approximation**

Question No: 10 (Marks: 1) - Please choose one

Word Processor is a

_____

► System Software ► **Application Software** ► Device ► Utility

Question No: 11 (Marks: 1) - Please choose one

In the old days, databases did NOT support _____.

► Number ► Boolean ► **Video** ► Text

Question No: 12 (Marks: 1) - Please choose one

In tabular storage, fields placed in a particular row are strongly _____.

► Independent ► Dependent ► **Interrelated** ► Inconsistent

Question No: 13 (Marks: 1) - Please choose one

Due to working at home, lack of interaction may result in _____ professional growth.

► **Slower** ► Faster ► Higher ► Improved

Question No: 14 (Marks: 1) - Please choose one

Distance learning has got a boost due to the _____.

► Easy communication ► Online interactive contents ► Flexibility

► **All of the given options**

Question No: 15 (Marks: 1) - Please choose one

_____ technique can be used to create smooth animations or to display one of several images based on the requirement.

► Image downloading ► **Image preloading** ► Image uploading

► Image postloading

Question No: 16 (Marks: 1) - Please choose one

The _____ is becoming the preferred organizational structure for more and more organizations with the passage of time.

► Tree structured organizational model

► **Network paradigm** ► Hierarchical structure ► None of the given options

Question No: 17 (Marks: 1) - Please choose one

The group of technologies concerned with the capturing, processing and transmission of information

in the digital electronic form is called _____.

► Telecom Engineering

► Computer Engineering

► Computer Science

► **Information Technology**

Question No: 18 (Marks: 1) - Please choose one

A large number of networks interconnected physically are called _____

► **LAN** ► MAN ► Internet ► Network collection

Question No: 19 (Marks: 1) - Please choose one

TCP stands for _____.

► Transfer Center protocol ► **Transmission Control Protocol**

► Transmission Center Protocol ► Telephone Center Protocol

Question No: 20 (Marks: 1) - Please choose one

A collection of data organized in such a way that the computer can quickly search for a desired data item is known as:

► Retrieving ► **Database** ► Information ► DBMS

Question No: 21 (Marks: 1) - Please choose one

_____ is simply a fast port that lets you connect computer peripherals and consumer electronics to your computer without restart.

► Freeware ► Shareware ► **Firewire** ► Firmware

Question No: 22 (Marks: 1) - Please choose one

Structures, in which another list starts before the first list is finished, are called:

► Multiple Lists ► **Nested Lists** ► Ordered Lists ► Un-ordered Lists

Question No: 23 (Marks: 1) - Please choose one

The key property of the 'Array' object in JavaScript is

► Value ► **Length** ► Name ► All of the given choices

Question No: 24 (Marks: 1) - Please choose one

Which one is the example of spreadsheet software?

► MS Word ► MS PowerPoint ► **MS Excel** ► MS Access

Question No: 25 (Marks: 1) - Please choose one

The Encryption of data is related to

► Data updates ► **Data security** ► Data integrity ► Data accessibility

Question No: 26 (Marks: 1) - Please choose one

_____ is the process of analyzing large databases to identify patterns.

► Data normalization ► Data management ► **Data Mining** ► None of the given options

Question No: 27 (Marks: 1) - Please choose one

Which is the user- friendly way of presenting data?

► Query ► Form ► **Report** ► All of the given options

Question No: 28 (Marks: 1) - Please choose one

JavaScript function fixed () has equivalent HTML tag-set ____

► <.FIX>.....</FIX> ► <F>.....</F>

► **<PRE>..... </PRE>** ► <H>.....</H>

Question No: 29 (Marks: 1) - Please choose one

<Form> Tags always placed between the <BODY> and </BODY> tags of a Web page

► **True**

► False

Question No: 30 (Marks: 1) - Please choose one

Javascript has ------- ---------- ability to create and draw graphics.

► Limited ► Versatile ► Medium ► **Not at all**

Final term paper

1-when actions depends upon the values of multiple variables we will use -----?

1-iF

2-else

3-if----else

4-none

2-when the exact number of iterations is known use the ----loop ?

1-for 2-if 3-while 4-none

3-when the number of iterations depend upon a condition being met use the ------ loop

1-for 2-switch 3-while 4-none

4-the key property of ‘’array ‘’object is ----------?

1-length 2-width 3-single 4-none

5-two of the key ‘’array ‘’methods are reverse ()-sort()

1-true 2-false

6-javascript array are -------?

1-multiple

2-heterogeneous

3-homogenous 4-none

7------multiple computers that are connected together to share information and other resources

1-network 2-internets

3-compnetworks 4-none

8 – comp networks can send an email message to a remote computer using the ---- protocol? 1-HTTP 2-FTP 3-SMTP 4-none

9-comp network can browse documents residing on a remote comp using -------?

1-HTTP 2-FTP 3-SMTP 4-none

10-comp networks can download and upload files to a remote comp using ------?

1-HTTP 2-FTP 3-SMTP 4-none

11- network can run a program on remote comp using the ----------?

1-SMTP 2-TELNET 3-HTTP 4-none

12-components of conventional computer networks are except one ?

1-VPN 2-NIC 3-computers 4-hub

13-NIC stands for ----------? 1-national internet cables
2-national interface cards

3-network interface cards 4-none

14-cables are either----------?

1-electrical 2-digital l3-optical 4-1 and 2

15- hub component of comp network is ----------?

1-I/O device 2-traffic controller
3-network traffic controller 4-none

16- optical cables are required by wireless networks

1-true 2-false

17------ a device used to connect several computers to form a network

1-hub 2-cable 3-NIC 4-none

18- a hub has several -----?

1-NIC 2-cables 3-packet 4-ports

19- ------ smaller unit of data transmitted over a comp network

1-hub 2-port 3-packet 4-none

20- all packets travel----------?

1-dependently 2-independently 3-alternatively 4-none

Question No: 1 (Marks: 1) - Please choose
one ---------- was known as "mill" in Analytical engine.

► Memory ► **Processor** ► Monitor ► Mouse

Question No: 2 (Marks: 1) - Please choose
one First electronic computer was

► ABC ► **UNVAC 1** ► Harvard Mark 1 ► IBM PC

Question No: 3 (Marks: 1) - Please choose

one What is NOT a key factor while designing a website?

► Usability ► User-friendly ► Consistency ► **Complexity**

Question No: 4 (Marks: 1) - Please choose one What happens if I start a new list without closing the original one?

► An error will be generated

► **A nested list will be created**

► Previous list will end and a new start. ► Nothing will happen

Question No: 5 (Marks: 1) - Please choose one The most upper right pixel of the screen is of _____ color.

► **Any** ► Red ► Green ► Blue

Question No: 6 (Marks: 1) - Please choose one

A single pixel can acquire approximately _____ color schemes.

► 1 million ► 2 million ► 10 million ► **16 million**

Question No: 7 (Marks: 1) - Please choose one The idea of Neural Networks field is based upon _____.

► Human nature

► **Human brain**

► Human culture

► Human actions

Question No: 8 (Marks: 1) - Please choose one Which one of the following is an application for artificial intelligence?

► **Robotic**

► Web Agent ► Decision Support System ► All of the given options

Question No: 9 (Marks: 1) - Please choose one Register is a kind of _____memory

► **Fast**

► Super fast ► Slow ► Very slow

Question No: 10 (Marks: 1) - Please choose one Which of the following is a true statement?

► Flat-file storage is better than tabular storage.

► **Tabular storage is better than flat-file storage.**

► Flat-file storage is better than relational storage.

► None of the given options

Question No: 11 (Marks: 1) - Please choose one substring(n, m) returns a string containing characters copied from position n to_____.

► m – 2

► **m – 1**

► m + 1 ► m

Question No: 12 (Marks: 1) - Please choose one

The _____ is the old profession which is being eliminated because of computing.

► **Typist**

► Bank manager ► Operational manager ► All of the given options

Question No: 13 (Marks: 1) - Please choose one

The system that manages relational database, is called _____.

► None of the given options

► Database Management System

► Data Management System

► **Relational Database Management**

System

Question No: 14 (Marks: 1) - Please choose one

When web server is busy it gives the following message to the user :

► Time out ► Waiting ► **Server busy** ► None of the given options

Question No: 15 (Marks: 1) - Please choose one The group of technologies concerned with the capturing, processing and transmission of information in the digital electronic form is called _____.

► Telecom Engineering ► Computer Engineering

► Computer Science ► **Information Technology**

Question No: 16 (Marks: 1) - Please choose one _____ team consists of the sharpest technical minds in the company.

► **Architecture** ► Business Development ► Configuration Management ► Developer

Question No: 17 (Marks: 1) - Please choose one

TCP stands for _____.

► Transfer Center protocol ► **Transmission Control Protocol**

► Transmission Center Protocol ► Telephone Center Protocol

Question No: 18 (Marks: 1) - Please choose one A collection of data organized in such a way that the computer can quickly search for a desired data item is known as :

► Retrieving ► **Database** ► Information ► DBMS

Question No: 19 (Marks: 1) - Please choose one Microsoft Word is a type of:

► System Software ► **Freeware Software** ► Shrink-Wrapped Software ► Custom-built Software

Question No: 20 (Marks: 1) - Please choose one Users _____, how things work.

► Analyze in detail ► **Muddle through** ► Figure out ► Read in detail

Question No: 21 (Marks: 1) - Please choose one Popular schemes used for reducing bytes for storage are:

► RGB and Color mapping ► RGB and Dithering

► RGB, Color mapping and Dithering ► **Color mapping and Dithering**

Question No: 22 (Marks: 1) - Please choose one Hardware malfunction is related to

► Data updates ► Data integrity ► Data security ► **Data accessibility**

Question No: 23 (Marks: 1) - Please choose one If incorrectly we enter the negative age it is check by

► **Limit Integrity** ► Type Integrity ► Referential Integrity ► Physical Integrity

Question No: 24 (Marks: 1) - Please choose one Which is the user-friendly way of presenting data ?

► Query ► Form ► **Report** ► All of the given options

Question No: 25 (Marks: 1) - Please choose one Currently the BlueRay DVD can store more than _____ of data.

► 10 GB ► 100 GB ► **50 GB** ► 150 GB

Question No: 26 (Marks: 1) - Please choose one In JavaScript, a || b is interpreted as

► a is true or b is false ► a is true and b is true

► a is false and b is true ► **a is true or b is true or both are true**

Question No: 27 (Marks: 1) - Please choose one
Speakers fall into the hardware category.

► **True** ► False

Question No: 28 (Marks: 1) - Please choose one onBlur event is occurred for a form element when it _____

► Gets focus ► **Loses focus** ► Something is typed in ► onBlur is not an event

Question No: 29 (Marks: 1) - Please choose one You can view a 3-D image on a _____.

► 3-D display ► 2-D display ► **On both 2-D and 3-D displays** ► We can not view a 3-D image

Question No: 30 (Marks: 1) - Please choose one Module level design and unit testing is the responsibility of _____.

► Team Lead ► **Developer** ► Project Manager ► Quality Assurance Expert

Final TERM EXAMINATION CS101- Introduction to Computing (Session - 2) Question No: 1 (Marks: 1) - Please choose one What is NOT a key factor while designing a website?

► Usability ► User-friendly ► Consistency ► **Complexity**

Question No: 2 (Marks: 1) - Please choose one Communications on the internet is controlled by a set of two protocols which are _____.

► IMAP and SMTP ► FTP and HTTP ► **TCP and IP** ► TCP and HTTP

Question No: 3 (Marks: 1) - Please choose one A variable can be _____ in scope.

► Local ► Global ► **Either local or global**

► None of the given options

Question No: 4 (Marks: 1) - Please choose one A protocol used for receiving email messages is called _____.

► URL ► Telnet ► **POP3** ► SMTP

Question No: 5 (Marks: 1) - Please choose one Aliasing problem can be managed by _____the size of pixels.

► **Reducing** ► Increasing ► Gaining ► Modifying

Question No: 6 (Marks: 1) - Please choose one Serial arrangement in which things follow logical order or a recurrent pattern, such as statements executing one by one, is called _____.

► Loop ► **Sequence** ► Condition ► Array

Question No: 7 (Marks: 1) - Please choose one Which of the following data types are recognized by JavaScript?

► Strings ► Numbers ► Undefined ► **All of the given options**

Question No: 8 (Marks: 1) - Please choose one a = Math.ceil(12.01) What will be the value of a ?

► 12 ► **13** ► 12.0 ► 13.01

Question No: 9 (Marks: 1) - Please choose one In the old days, databases did NOT support _____.

► Number ► Boolean ► **Video** ► Text

Question No: 10 (Marks: 1) - Please choose one The organizations are learning that business can be done in a more effective manner if emphasis is placed upon _____.

► Cooperation ► Shared responsibility ► Networking

► **All of the given options**

Question No: 11 (Marks: 1) - Please choose one Module level design is the responsibility of the _____.

► Architect ► Team Lead ► **Developer** ► CEO

Question No: 12 (Marks: 1) - Please choose one _____ errors are caused by the code that somehow violates the rule of the language.

► **Syntax** ► Semantic ► Run time ► Load time

Question No: 13 (Marks: 1) - Please choose one The world's first computer program was written to compute:

► Simple sequence ► Multiple sequence

► **Bernoulli's sequence** ► Increasing sequence

Question No: 14 (Marks: 1) - Please choose one
Microsoft Word is a type of:

► System Software ► Freeware Software

► **Shrink-Wrapped Software** ► Custom-built Software

Question No: 15 (Marks: 1) - Please choose one We need _____ for memory management in computer

► Software ► Hardware ► **Operating System**

► Application Software

Question No: 16 (Marks: 1) - Please choose one _____ is generally measured in terms of the number of steps required to execute an algorithm.

► Space ► **Time** ► Memory and time ► Bandwidth

Question No: 17 (Marks: 1) - Please choose one
PowerBuilder falls in the category of _____.

► Assembly Languages ► **4-th Generation Languages**

► Machine Languages ► High-Level Languages

Question No: 18 (Marks: 1) - Please choose one _____ means to break down into simpler components and analyze.

► Recursion ► **Parsing** ► Scope ► Navigation

**Question No: 19 (Marks: 1) - Please choose one for(var i=1; i<=2;i=i+1) { document.write("Sorted Words:" + "
") }** Which of the following shall be the output of the above code:

►Sorted Words: Sorted Words: ►Sorted Words:Sorted Words:

►Sorted Words: "
" Sorted Words: "
"

► **Sorted Words:
 Sorted Words:
 (correct)**

Question No: 20 (Marks: 1) - Please choose one Assembly languages

allow a programmer to use _____ for numbers.

► Object ► Entity ► **Name** ► Interpreter

Question No: 21 (Marks: 1) - Please choose one _____ means you have only one container to store more than one value in JavaScript.

► Variable ► Matrix ► **Array** ► String

Question No: 22 (Marks: 1) - Please choose one Coding is the responsibility of _____

► Software design ► **Software developer** ► Project manager

► None of given

Question No: 23 (Marks: 1) - Please choose one CEO stands for_____

► Central Executive officer ► Chief External officer

► **Chief executive officer** ► None of given

Question No: 24 (Marks: 1) - Please choose one Decision Support Systems will become a bigger part of the professional life of the_____ .

► Doctors ► Managers ► Marketers ► **All of above**

Question No: 25 (Marks: 1) - Please choose one

The output of fuzzy Logic System is computed by using _____Technique.

► MAX-MAX ► MAX-MIN ► **MIN-MAX** ► None of the given

Question No: 26 (Marks: 1) - Please choose one In the statement Math.PI, Math is _____ and PI is _____.

► Variable, Constant ► Object , Method

► Object , Function ► **Object , Property**

FINAL TERM EXAMINATION CS101-
Introduction to Computing (Session - 2)

Question No: 1 (Marks: 1) - Please choose one

It represents the _____ flow chart element.

► Process ► **Input or Output** ► Decision ► Connector

Question No: 2 (Marks: 1) - Please choose one

Website design should NOT be _____.

► Unified ► **Complex** ► Consistent ► Predictable

Question No: 3 (Marks: 1) - Please choose one

The most upper right pixel of the screen is of _____ color.

► **Any** ► Red ► Green ► Blue

Question No: 4 (Marks: 1) - Please choose one

Which of the following is NOT an example of Multi-user Operating system

► Windows ► Linux ► **DOS** ► Solaris

Question No: 5 (Marks: 1) - Please choose one

According to the heuristic, the number of defects remaining in a system after a given level of tests is proportional to _____.

► **The number found on the very first day.**

► The number found during the development.

► The number found during the

test.

► None of the given options.

Question No: 6 (Marks: 1) - Please choose one

Which one of the following is NOT a component of Rule Based System?

► **Rule Compiler** ► Rule Interpreter ► Rules Base ► Working Memory

Question No: 7 (Marks: 1) - Please choose one

In RDBMS, table rows are called _____.

► Field ► **Record** ► Column ► Query

Question No: 8 (Marks: 1) - Please choose one

_____ can be used for entering, editing, or viewing data, one record at a time.

► Queries ► **Forms** ► Reports ► None of the given options

Question No: 9 (Marks: 1) - Please choose one

Tribal flood network is a _____
software.

► **DoS** ► Scanning ► Utility ► None of the given options

Question No: 10 (Marks: 1) - Please choose one

Unlike virus, _____ is a stand-alone program.

► **Trojan horse** ► Logic bomb ► Worm ► Time bomb

Question No: 11 (Marks: 1) - Please choose one

The key responsibilities of a project manager is _____.

► Planning and tracking of the project

► Arranging of the appropriate resources

► Client relationship
management

► **All of the given options**

Question No: 12 (Marks: 1) - Please choose one

The key responsibilities of the architect of the project
is_____.

► Technology
selection

► High-level
design

► Makes certain that the implementation remains true to the design

► **All of the given options**

Question No: 13 (Marks: 1) - Please choose one

_____ is responsible for day to day
operations.

► CEO ► **COO** ► CMSO ► Developer

Question No: 14 (Marks: 1) - Please choose one

onAbort , onError are the _____ of the image object.

► **Event Handler** ► Properties ► Methods

► None of the given
options

Question No: 15 (Marks: 1) - Please choose one

The tasks performed to detect the exact location of defect is called_____

► **Debugging** ► Testing ► Repairing ► Monitoring

Question No: 16 (Marks: 1) - Please choose one

_____ routes the packets through the internet to go to their destination.

► Protocol ► TCP ► **IP** ► NIC

Question No: 17 (Marks: 1) - Please choose one

When we buy a software package, we do not really buy it, we just by a license that allows us to use it, the _____stays with the maker.

► Agreement ► **Ownership** ► Membership ► Software

Question No: 18 (Marks: 1) - Please choose one

Sequence of steps that is taken to solve a problem is called _____.

► **Algorithm** ► Operating System ► Application software

► None of the given
options

Question No: 19 (Marks: 1) - Please choose one

A collection of data organized in such a way that the computer can quickly search for a

desired data item is known as :

► Retrieving ► **Database** ► Information ► DBMS

Question No: 20 (Marks: 1) - Please choose one

To start an ordered list from 20 instead of 1, we will write

► <OL begin = “20"> ► <OL initiate = “20">

► **<OL start = “20">** ► <OL from = “20">

Question No: 21 (Marks: 1) - Please choose one

_____ are personal computers that are designed to be easily transported and relocated.

► Desktops ► **Portables** ► Servers ► Workstations

Question No: 22 (Marks: 1) - Please choose one

To display a multi-line text area on the web page, we use ___ tag

► TEXT ► **TEXTAREA** ► INPUT ► INPUT AREA

Question No: 23 (Marks: 1) - Please choose one

The first component of an operating system that runs when a typical computer is turned ON, is:

► Device Manager ► File Manager ► **Loader** ► Device Driver

Question No: 24 (Marks: 1) - Please choose one

Pseudo code is written in

► **Complex grammar** ► Plain English ► JAVA ► Pseudo language

Question No: 25 (Marks: 1) - Please choose one

Instead of Full System, one can _____ results from part of a System

► **Not achieve** ► Mostly achieve ► Sometimes achieve ► Achieve

Question No: 26 (Marks: 1) - Please choose one

One can download or upload files to a remote computer using _____ protocol.

► HTTP ► SMTP ► **FTP** ► TELNET

Question No: 27 (Marks: 1) - Please choose one

Which protocol is used to control other computer from our own computer ?

► FTP ► NNTP ► **TELNET** ► None of the given choices

Question No: 28 (Marks: 1) - Please choose one

Which function returns a randomly selected floating point number between 0 and 1 ?

► floor(x) ► ceil(x) ► **random()** ► round(x)

Question No: 29 (Marks: 1) - Please choose one

Global variables can make the logic of a web page.

► Difficult to understand

► Easier to understand and maintain

► Difficult to reuse and maintain

► **Difficult to understand, reuse and maintain**

Question No: 30 (Marks: 1) - Please choose one

Mathematical functions in JavaScript, are accessed by referring to various methods of the _____ object.

► **Math** ► Calculate ► Compute ► None of the given options

FINAL TERM EXAMINATION CS101-
Introduction to Computing (Session - 2)

Question No: 1 (Marks: 1) - Please choose one

Humans are better than computers at :

► Efficiency ► Accuracy ► **Pattern recognition** ► None of the given choices

Question No: 2 (Marks: 1) - Please choose one

TCP stands for _____.

► Total communication protocol ► **Transmission control protocol**

► Transfer control protocol ► Transfer collection protocol

Question No: 3 (Marks: 1) - Please choose one

First computer network was _____.

► NSFNET ► FIRSTNET ► **ARPANET** ► ORPHANET

Question No: 4 (Marks: 1) - Please choose one

A user may access any item on the web through _____.

► **URL** ► Telnet ► POP ► SMTP

Question No: 5 (Marks: 1) - Please choose one

In JavaScript, a variable declaration
is

► **Optional** ► Mandatory ► Not allowed ► None of the given

Question No: 6 (Marks: 1) - Please choose one

According to a popular heuristic, success is defined by _____.

► **The user** ► The builder ► Both user and builder

► None of the given
options

Question No: 7 (Marks: 1) - Please choose one

To store rounded number of 8.6 in a variable called "r_number", we write _____.

► r_numbers=Maths.rounds(8.6) ► r_number=Math.rounds(8.6)

► **r_number=Math.round(8.6)** ► r_number=Maths.round(8.6)

Question No: 8 (Marks: 1) - Please choose one

random() function returns a randomly-selected, floating-point number between _____.

► **0 and 1** ► 0 and 10 ► 0 and -10 ► 0 and -1

Question No: 9 (Marks: 1) - Please choose one

Trinoo is a _____
software.

► **DoS** ► Scanning ► Utility ► None of the given options

Question No: 10 (Marks: 1) - Please choose one

Which attribute of the IMG tag tells us about the source of the image _____.

► source ► path ► loc ► **src**

Question No: 11 (Marks: 1) - Please choose one

The developer report to _____ in a development team.

► **Team Lead** ► Project Manager ► CEO ► IT Manager

Question No: 12 (Marks: 1) - Please choose one

The effective way to not only write programs but also it works properly and furthermore to minimize the time and the development cost of the program is called_____

► Programming Mechanism ► **Programming Methodology**

► Programming Synchronization ► None of the given options

Question No: 13 (Marks: 1) - Please choose one

TCP stands for _____.

► Transfer Center protocol ► **Transmission Control Protocol**

► Transmission Center Protocol ► Telephone Center Protocol

Question No: 14 (Marks: 1) - Please choose one

When we buy a software package, we do not really buy it, we just by a license that allows us to use it, the _____stays with the maker.

► Agreement ► **Ownership** ► Membership ► Software

Question No: 15 (Marks: 1) - Please choose one

Many developers write the _____ first and then incrementally convert each line into _____.

► Real code & Pseudocode ► **Pseudocode & Real code**

► Real code & Artificial code ► None of the given options

Question No: 16 (Marks: 1) - Please choose one

Collection of facts & figures is called _____.

► **Information** ► Data ► Entity ► Attribute

Question No: 17 (Marks: 1) - Please choose one

A collection of data organized in such a way that the computer can quickly search for a desired data item is known as :

► Retrieving ► **Database** ► Information ► DBMS

Question No: 18 (Marks: 1) - Please choose one

To start an ordered list from 20 instead of 1, we will write

► <OL begin = “20"> ► <OL initiate = “20">

► **<OL start = “20">** ► <OL from = “20">

Question No: 19 (Marks: 1) - Please choose one

Using COLSPAN, number of rows of the current cell should extend itself

► Upward ► **Downward**

► Both Upward and Downward ► None of the given choices

Question No: 20 (Marks: 1) - Please choose one

Microsoft Word is a type of:

► System Software ► **Freeware Software**

► Shrink-Wrapped Software ► Custom-built Software

Question No: 21 (Marks: 1) - Please choose one

Compound Statement after decision constructs in JavaScript is enclosed with

► ( ) ► [ ] ► { }; ► **{ }**

Question No: 22 (Marks: 1) - Please choose one

Users _____, how things work.

► Analyze in detail ► **Muddle through** ► Figure out ► Read in detail

Question No: 23 (Marks: 1) - Please choose one

One can send an email message to a remote computer using _____ protocol

► HTTP ► **SMTP** ► FTP ► TELNET

Question No: 24 (Marks: 1) - Please choose one

Writing a response, multiple statements are separated from each other with the help of

► **Period (.)** ► Comma (,) ► Colon (:) ► Semicolon (;)

Question No: 25 (Marks: 1) - Please choose one

With the passage of time the field of Computing and Telecommunication is _____.

► Diverging ► **Converging** ► Becoming different ► Becoming unique

Question No: 26 (Marks: 1) - Please choose one

When we have to show value as part of a whole picture, which type of chart is used.

► Bar chart ► Pie chart ► Line graph ► **None of the given**

Question No: 27 (Marks: 1) - Please choose one

_____ software directly interacts with the user.

► **Application software** ► System software

► Anonymous software ► Interactive software

Question No: 28 (Marks: 1) - Please choose one

Global variables can make the logic of a web page.

► **Difficult to understand** ► Easier to understand and maintain

► Difficult to reuse and maintain ► Difficult to understand, reuse and maintain

Question No: 29 (Marks: 1) - Please choose one

In partitioning of program/module, it should be assured that partitioned chunks should be as _____ as possible.

► Dependent ► **Independent** ► Complex ► All of the above

Final TERM EXAMINATION CS101- Introduction to Computing
(Session - 2) Question No: 1 (Marks: 1) - Please choose one

The memory size of the Altair 8800 was

► 128 bytes ► 128 Kilobytes ► 256 Kilobytes ► **256 bytes**

Question No: 2 (Marks: 1) - Please choose one

A named collection of properties (data, state) and methods (instruction, behavior) is called _____.

► Array ► Function ► Variable ► **Object**

Question No: 3 (Marks: 1) - Please choose one

JavaScript Variables are

► **Dynamically Typed** ► Statically Typed ► Strong Typed

► None of the given options

Question No: 4 (Marks: 1) - Please choose one

https://www.vuhelpcorner.com

Serial arrangement in which things follow logical order or a recurrent pattern, such as statements executing one by one, is called _____.

► Loop ► Sequence ► Condition ► **Array**

Question No: 5 (Marks: 1) - Please choose one

Rule of thumb learned through trial and error is called _____.

► Design ► **Heuristic** ► Plan ► Aim

Question No: 6 (Marks: 1) - Please choose one

According to heuristic, if you can't explain it in _____ minutes, either you don't understand it or it does not work.

► 10 ► 2 ► **5** ► 4

Question No: 7 (Marks: 1) - Please choose one

To store rounded number of 8.6 in a variable called "r_number", we write _____.

► r_numbers=Maths.rounds(8.6) ► r_number=Math.rounds(8.6)

► **r_number=Math.round(8.6)** ► r_number=Maths.round(8.6)

Question No: 8 (Marks: 1) - Please choose one

Using only HTML we can create

► Dynamic web pages ► **Static web pages**

► Both Static and Dynamic pages ► None of these

Question No: 9 (Marks: 1) - Please choose one

_____ function returns the largest integer that is less than or equal to x.

► **round(x)** ► floor ► ceil ► abs(x)

Question No: 10 (Marks: 1) - Please choose one

Due to working at home, contact with colleagues is _____, which may result in _____ quality of work

► Reduced, Poorer ► Reduced, Better ► Increased, Poorer ► **Increased, Better**

Question No: 11 (Marks: 1) - Please choose one

The distance among families is _____ because of spending more time on the internet

https://www.vuhelpcorner.com.

► **Increased** ► Expanded ► Contracted ► Decreased

Question No: 12 (Marks: 1) - Please choose one

When web server is busy it gives the following message to the user :

► Time out ► Waiting ► **Server busy** ► None of the given options

Question No: 13 (Marks: 1) - Please choose one

_____ is designed for detecting viruses and inoculating.

► **Antivirus** ► Utility ► Trojan ► None of the given choices

Question No: 14 (Marks: 1) - Please choose one

The _____ is becoming the preferred organizational structure for more and more organizations with the passage of time.

► Tree structured organizational model ► **Network paradigm**

► Hierarchical structure ► None of the given options

Question No: 15 (Marks: 1) - Please choose one

Planning and tracking of the project is the responsibility of the_____.

► **Project Manager** ► Architect ► Developer ► Chief Executive Officer

Question No: 16 (Marks: 1) - Please choose one

The responsibilities of the Team Lead includes_____.

► **Planning and tracking of the project**

► Detailed design

► Professional development of team members

► All of the given options

Question No: 17 (Marks: 1) - Please choose one

_____ team is responsible for a project after the specification's stage till the very end.

► Executive ► Architect ► **Development** ► HR

Question No: 18 (Marks: 1) - Please choose one

There are _____ types of errors.

► 2 ► **3** ► 4 ► 5

Question No: 19 (Marks: 1) - Please choose one

_____ are the computers that perform at or near the currently highest operational rate for computers.

► Minicomputers ► Microcomputers ► **Supercomputers** ► Personal

Computers

Question No: 20 (Marks: 1) - Please choose one

Which one of these is NOT an example of storage devices?

► Tape ► **RAM** ► Floppy ► DVD

Question No: 21 (Marks: 1) - Please choose one

Forms can be submitted by using _____ different methods

► **2** ► 3 ► 4 ► 5

Question No: 22 (Marks: 1) - Please choose one

Which is NOT true for JavaScript variable name ?

► Student ► Roll_no_1111 ► For ► **_schedule**

Question No: 23 (Marks: 1) - Please choose one

One can browse documents residing on a remote computer using _____ protocol.

► **HTTP** ► SMTP ► FTP ► TELNET

Question No: 24 (Marks: 1) - Please choose one

Which one is the example of spreadsheet software ?

► MS Word ► MS PowerPoint ► **MS Excel** ► MS Access

Question No: 25 (Marks: 1) - Please choose one

User can remotely log on to a computer and can have a control over it like a local user using

► TelNet Protocol

► **TelNet Protocol and connected to the user through TCP/IP**

network

► TelNet protocol and FTP ► TCP/IP and FTP

Question No: 26 (Marks: 1) - Please choose one

Hardware malfunctions is related to

► Data updates ► Data integrity ► Data security ► **Data accessibility**

Question No: 27 (Marks: 1) - Please choose one

PowerBuilder falls in the category of _____.

► Assembly Languages ► 4-th Generation Languages

► Machine Languages ► **High-Level Languages**

Question No: 28 (Marks: 1) - Please choose one

Backbone is also called as _____.

► **vBNS** ► BNS ► vHBNS ► HBNS

Question No: 29 (Marks: 1) - Please choose one

Global variables can make the logic of a web page.

► **Difficult to understand** ► Easier to understand and maintain

► Difficult to reuse and maintain ► Difficult to understand, reuse and maintain

Question No: 30 (Marks: 1) - Please choose one

In JavaScript: In order to display the text on browser **Grade A**, which of the following statement is True.

► document.write("Grade A") ► **document.write("Grade A");**

► document.write("Grade” && A"); ► document.write("Grade” && “A");

FINAL TERM EXAMINATION CS101- Introduction to Computing
(Session - 3) Question No: 1 (Marks: 1) - Please choose one

First computer network was _____.

► NSFNET ► FIRSTNET ► **ARPANET** ► ORPHANET

Question No: 2 (Marks: 1) - Please choose one

In a good presentation each slide should contain_____.

► **Heading** ► Phrases not sentences ► Sentences not phrases ► Heading, sentences not phrases

Question No: 3 (Marks: 1) - Please choose one

A function is also called _____.

► Subprogram ► Procedure ► Subroutine ► **All of the given option**

Question No: 4 (Marks: 1) - Please choose one

A single pixel can acquire approximately _____ color schemes.

► 1 million ► 2 million ► 10 million ► **16 million**

Question No: 5 (Marks: 1) - Please choose one

Which of the following is NOT a Loop statement?

https://www.vuhelpcorner.com

► For ► While ► **Switch** ► Do-While

Question No: 6 (Marks: 1) - Please choose one

Which one of the following is NOT a component of Rule Based

System?

► **Rule Compiler** ► Rule Interpreter ► Rules Base ► Working Memory **Question No: 7 (Marks: 1) - Please choose one**

Spreadsheet is a type of _____.

► **Productivity software** ► Engineering software ► Mathematical software ► Business software

Question No: 8 (Marks: 1) - Please choose one

A combination of word processing and graphic design is

► CorelDraw ► **Desktop Publishing** ► Paint ► WordPad

Question No: 9 (Marks: 1) - Please choose one

To store rounded number of 8.6 in a variable called "r_number", we write _____.

► r_numbers=Maths.rounds(8.6) ► r_number=Math.rounds(8.6)

► **r_number=Math.round(8.6)** ► r_number=Maths.round(8.6)

Question No: 10 (Marks: 1) - Please choose one

Which of the following is a true statement?

► Flat-file storage is better than tabular storage.

► **Tabular storage is better than flat-file storage.**

► Flat-file storage is better than relational storage.

► None of the given options

Question No: 11 (Marks: 1) - Please choose one

The political process is also influenced by the use of

_____.

► Discussion forums ► Newsgroups ► Mailing lists

► **All of the given options**

Question No: 12 (Marks: 1) - Please choose one

The system that manages relational database, is called _____.

► **None of the given options**

► Database Management System

► Data Management System

► Relational Database Management System

Question No: 13 (Marks: 1) - Please choose one

_____ DBMS supports data in terabytes.

► Personal ► Desktop ► **Enterprise** ► Single-user

Question No: 14 (Marks: 1) - Please choose one

Trinoo is a _____ software.

► **DoS** ► Scanning ► Utility ► None of the given options

Question No: 15 (Marks: 1) - Please choose one

What is the major problem with flash based website?

► **Its two heavy** ► Cannot be indexed ► Less attractive ► Inaccessible

Question No: 16 (Marks: 1) - Please choose one

The organization is the collection of _____.

► **Peoples** ► Professionals ► Teams ► Individuals

Question No: 17 (Marks: 1) - Please choose one

The tasks performed to determine the existence of defects is called _____

► Debugging ► **Testing** ► Repairing ► Coding

Question No: 18 (Marks: 1) - Please choose one

Many developers write the _____ first and then incrementally convert each line into _____.

► Real code & Pseudocode ► **Pseudocode & Real code**

► Real code & Artificial code ► None of the given options

Question No: 19 (Marks: 1) - Please choose one

Forms can be submitted through _____ & _____ methods

► INCLUDE, POST ► INCLUDE, GET

► **GET, POST** ► SEND, POST

Question No: 20 (Marks: 1) - Please choose one

If an algorithm is syntactically correct, but semantically incorrect then this situation is

► Very good situation ► **Very dangerous situation**

► Not very bad ► Neutral situation

Question No: 21 (Marks: 1) - Please choose one

Heuristics _____ lead to the best results.

► Sometimes ► Do not ► Occasionally ► **Not always**

Question No: 22 (Marks: 1) - Please choose one

In TCPIP communication fragmentation is responsibility of

► TCP ► IP ► **Both TCP and IP** ► Internet

Question No: 23 (Marks: 1) - Please choose one

Access to the internet became easier after the invention of

► **WWW & Web Browsers**

► Mainframes

► Binary system

► Signals

Question No: 24 (Marks: 1) - Please choose one

Which one is the example of spreadsheet software ?

► MS Word ► MS PowerPoint ► **MS Excel** ► MS Access

Question No: 25 (Marks: 1) - Please choose one

User can remotely log on to a computer and can have a control over it like a local user using

► TelNet Protocol

► **TelNet Protocol and connected to the user through TCP/IP network**

► TelNet protocol and FTP

► TCP/IP and FTP

Question No: 26 (Marks: 1) - Please choose one

If incorrectly we enter the negative age it is check by

► **Limit Integrity** ► Type Integrity ► Referential Integrity ► Physical Integrity

Question No: 27 (Marks: 1) - Please choose one

---------- is a digital programmable mechanical machine

► **Analytical Engine** ► Difference Engine ► Harvard Mark 1 ► Mechanical

engine

Question No: 28 (Marks: 1) - Please choose one

This element of FlowChart is called_____.

► Process ► **Off page connector** ► Decision ► Connector

Question No: 29 (Marks: 1) - Please choose one

In a library's database, if there is an entry in the register for Book # 423 then the corresponding Book must actually exist; is an example of which type of data integrity

► Type integrity ► Limit integrity ►Physical Integrity ►**Referential Integrity**

Question No: 30 (Marks: 1) - Please choose one

Ada is a programming language specifically designed for

► **Analytical Engine** ► Difference Engine ► Harvard Mark 1 ► Mechanical engine

FINAL TERM EXAMINATION CS101- Introduction to Computing

(Session - 1) Question No: 1 (Marks: 1) - Please choose one Cray-1 was first commercial _____ computer

► **Super** ► Mini ► Micro ► Personal

Question No: 2 (Marks: 1) - Please choose one

The name of the first browser was

_____

► **Internet Explorer** ► Mosaic ► Netscape ► Firefox

Question No: 3 (Marks: 1) - Please choose one

The impact of a digit in a number is determined by its ----------

► Value ► Location ► **Length** ► None of above

Question No: 4 (Marks: 1) - Please choose one

First computer network was

_____.

► NSFNET ► FIRSTNET ► **ARPANET** ► ORPHANET

Question No: 5 (Marks: 1) - Please choose one

A variable can be _____ in

scope.

► Local ► Global ► **Either local or global**

► None of the given options

Question No: 6 (Marks: 1) - Please choose one

_____ color should be used in background for a good presentation.

► Light ► **Dark** ► Red ► None of the given options

Question No: 7 (Marks: 1) - Please choose one

Which one of the following is not an event handler's attribute?

► Function ► Identifier ► Equal sign

► **String consisting of JavaScript statements**

Question No: 8 (Marks: 1) - Please choose one

Variables allow us to manipulate data through the _____.

► Actual Value ► Reference ► **Length** ► Name

Question No: 9 (Marks: 1) - Please choose one

Which one of the following is NOT a component of Rule Based System?

► Rule Compiler ► Rule Interpreter ► Rules Base ► **Working Memory**

Question No: 10 (Marks: 1) - Please choose one

Fuzzy logic is based on _____.

► Ground facts ► Experience ► Practice ► **Approximation**

Question No: 11 (Marks: 1) - Please choose one

a = Math.ceil(12.01)

What will be the value of a ?

► **12** ► 13 ► 12.0 ► 13.01

Question No: 12 (Marks: 1) - Please choose one

Tag used to make a Text Bold is

_____

► <BOLD></BOLD> ► **<B></B>** ► <BODY></BODY> ► None of these

Question No: 13 (Marks: 1) - Please choose one

<P> </P> and
 tags are not same
because

► goes to the next
line

►
 goes to the next after next line

► **<P></P> goes to the next after next line**

► Both are
same

Question No: 14 (Marks: 1) - Please choose one

Event handlers are placed in the _____ portion of a Web page as attributes in HTML tags.

► HEAD ► **BODY** ► SCRIPT ► TITLE

Question No: 15 (Marks: 1) - Please choose one

Due to working at home, lack of interaction may result in _____ professional growth.

► **Slower** ► Faster ► Higher ► Improved

Question No: 16 (Marks: 1) - Please choose one

_____ DBMS supports data in
terabytes.

► Personal ► Desktop ► **Enterprise** ► Single-user

Question No: 17 (Marks: 1) - Please choose one

_____ waits for some time and then launch a
function.

► Timeout( ) ► **setTimeout( )** ► setTime( ) ► setTimeIn( )

Question No: 18 (Marks: 1) - Please choose one

The responsibilities of the Team Lead includes_____.

► Planning and tracking of the project

► Detailed
design

► Professional development of team members

► **All of the given options**

Question No: 19 (Marks: 1) - Please choose one

_____ is also known as System Architecture

► **High level system design**

► Low level system design

► Every system design

► Software Requirement

Question No: 20 (Marks: 1) - Please choose one

The key property of the 'Array' object in JavaScript is

► Value ► **Length** ► Name

► All of the given choices

Question No: 21 (Marks: 1) - Please choose one

There are _____ ways of calling functions.

► One ► **Two** ► Three ► Four

Question No: 22 (Marks: 1) - Please choose one

Which event handler executes the specified JavaScript code when a window/form element loses focus ?

► **onBlur** ► onLoad ► onUnload ► onFocus

Question No: 23 (Marks: 1) - Please choose one

Popular schemes used for reducing bytes for storage are:

► RGB and Color mapping

► RGB and Dithering

► RGB, Color mapping and Dithering

► **Color mapping and Dithering**

Question No: 24 (Marks: 1) - Please choose one

Hardware malfunctions is related to

► Data updates ► **Data integrity** ► Data security ► Data accessibility

Question No: 25 (Marks: 1) - Please choose one

Users communicate with the computer using a consistent user interface provided by the OS. ► **True** ► False

Question No: 26 (Marks: 1) - Please choose one

Extension for saving web page is / are;

► ***.html** ► *.htm ► *.html and *.htm both are in use

► None of These

Question No: 27 (Marks: 1) - Please choose one

_____ loop is a flow control statement that allows code to be executed repeatedly based on a given Boolean condition.

► For ► Do-While ► **If-else** ► While

Question No: 28 (Marks: 1) - Please choose one

onBlur event is occurred for a form element when it _____

► **Gets focus** ► Loses focus

► Some thing is typed in ► onBlur is not an event

Question No: 29 (Marks: 1) - Please choose one

```
<script>
Number=new Array(5);
for(var i=1; i<=5 ; i=i+1)
{
    for( var k=6; k<=10;
    k=k+1)
    {
        Number[i]= k*i; } } </script>
```

For how many times the Nested For Loop shall execute;

► 20
► 15
► 25
► **Shall terminate in first loop.**

Question No: 30 (Marks: 1) - Please choose one

In JavaScript: In order to display the text on browser **Grade A**, which of the following statement is True.

► document write("Grade A") ► document.write("Grade A");
► document.write("Grade" && A"); ► **document.write("Grade" && "A**");

FINAL TERM EXAMINATION CS101-
Introduction to Computing (Session - 4)

Question No: 1 (Marks: 1) - Please choose one

Success of a website is defined by _____.

►**Use**► Designer ► Developer ► Programmer

Question No: 2 (Marks: 1) - Please choose one

Which one is correct for JavaScript?

► **onMouseOver** ► OnMouseOver ► onmouseover ► All of the given

Question No: 3 (Marks: 1) - Please choose one

An indexed list of elements is called _____.

► Collection ► **Array** ► Set ► Group

Question No: 4 (Marks: 1) - Please choose one

_____ is the way that internet domain names are located and translated into IP addresses.

► FTP ► VoIP ►**DNS** ► TCP

Question No: 5 (Marks: 1) - Please choose one

The browser breaks down the URL into _____ parts.

► 2 ►**3** ► 4 ► 5

Question No: 6 (Marks: 1) - Please choose one

Which one of the following is not an event handler's attribute?

► Function ► Identifier ► Equal sign

► String consisting of JavaScript statements

Question No: 7 (Marks: 1) - Please choose one

JavaScript Variables are

► Dynamically Typed ► Statically Typed

► Strong Typed ► None of the given options

Question No: 8 (Marks: 1) - Please choose one

Which of the following is NOT a Loop statement?

► For ► While **► Switch** ► Do-While

Question No: 9 (Marks: 1) - Please choose one

According to a popular heuristic, success is defined by _____.

► **The user** ► The builder ► Both user and builder ► None of the given options

Question No: 10 (Marks: 1) - Please choose one

Which one of the following is an application for artificial intelligence?

► **Robotic** ► Web Agent ► Decision Support System ► All of the given options

Question No: 11 (Marks: 1) - Please choose one

https://www.vuhelpcorner.com

Using only HTML we can create

► Dynamic web pages ►**Static web pages**

► Both Static and Dynamic pages

► None of these

Question No: 12 (Marks: 1) - Please choose one

The _____ is connected to all other modules of the microprocessor.

► **Control unit** ► Memory unit ► Floating Point unit ► Arithmetic and Logic unit

Question No: 13 (Marks: 1) - Please choose one

Which of the following is NOT a Relational DBMS software.

► Access ► FrontPage ► FileMaker Pro ► **SQL Server**

Question No: 14 (Marks: 1) - Please choose one

country=”Hello Pakistan”;
document.write(country.length); The output of the above statement is _____.

► 12 ► 13 ► 14 ► **15**

Question No: 15 (Marks: 1) - Please choose one

The distance among families is _____ because of spending more time on the internet.

► **Increased** ► Expanded ► Contracted ► Decreased

Question No: 16 (Marks: 1) - Please choose one

_____ is a field that uniquely identifies each record stored in a table.

► Composite Key ► **Primary key** ► Foreign key ► None of the given options

Question No: 17 (Marks: 1) - Please choose one

Planning and tracking of the project is the responsibility of the_____.

► Architect ► **Team Lead** ► Developer ► Chief Executive Officer

Question No: 18 (Marks: 1) - Please choose one

_____ has great PR skills.

► Architect ► Team Lead ► Project Manager ► **Chief Executive Officer**

Question No: 19 (Marks: 1) - Please choose one

_____ team is responsible for a project after the specification’s stage till the very end.

► Executive ► Architect ► **Development** ► HR

Question No: 20 (Marks: 1) - Please choose one

A large number of networks interconnected physically is called _____

► LAN ► **WAN** ► Internet ► Network collection

Question No: 21 (Marks: 1) - Please choose one

Efficiency is _____ to universality

► Equal ► **Direct proportional** ► Inversely proportional ► Not proportional

Question No: 22 (Marks: 1) - Please choose one

There are _____ ways of calling functions.

► One ► **Two** ► Three ► Four

Question No: 23 (Marks: 1) - Please choose one

Which protocol is used to transfer a file over the network?

► UDP ► **FTP** ► TCP ► OSI

Question No: 24 (Marks: 1) - Please choose one

Writing a response, multiple statements are separated from each other with the help of

► **Period (.)** ► Comma (,) ► Colon (:) ► Semicolon (;)

Question No: 25 (Marks: 1) - Please choose one

Popular schemes used for reducing bytes for storage are:

► RGB and Color mapping ► RGB and Dithering

► RGB, Color mapping and Dithering ► **Color mapping and Dithering**

Question No: 26 (Marks: 1) - Please choose one

_____ has the ability to automate and simplify daily tasks.

► Productivity software ► **Application software**

► System software ► Graphical software

Question No: 27 (Marks: 1) - Please choose one Which representation technique of algorithm is more suitable for developer to make actual code_____.

► **pseudo code** ► flow chart ► both pseudocode and flowchart ► Heuristics

Question No: 28 (Marks: 1) - Please choose one

_____ is used to terminate all JavaScript statements.

► Colon ► **Semicolon** ► Underscore ► Apostrophe

Question No: 29 (Marks: 1) - Please choose one

CONCATENATE operator is used to_____ elements.

► Subtract ► Multiply ► **Join** ► Add

Question No: 30 (Marks: 1) - Please choose one

In partitioning of program/module, it should be assured that partitioned chunks should be as _____ as possible.

► Dependent ► **Independent** ► Complex ► All of the abov

FINAL TERM EXAMINATION CS101-
Introduction to Computing (Session - 3)

Question No: 1 (Marks: 1) - Please choose one

The memory size of the Altair 8800 was

► 128 bytes ► 128 Kilobytes ► **256 Kilobytes** ► 256 bytes

Question No: 2 (Marks: 1) - Please choose one

Hexadecimal number system is based on ---------- digits

► 2 ► 8 ► 12 ► **16**

Question No: 3 (Marks: 1) - Please choose one

Which one of the following is not an event handler's attribute?

► Function ► Identifier ► Equal sign

► **String consisting of JavaScript statements**

Question No: 4 (Marks: 1) - Please choose one

Which is correct?

► **onUnload** ► onUnLoad ► onUNLOAD ► All of the above

Question No: 5 (Marks: 1) - Please choose one

The most upper right pixel of the screen is of _____ color.

► **Any** ► Red ► Green ► Blue

Question No: 6 (Marks: 1) - Please choose one

Which of the following is NOT a Loop statement?

► For ► While ► **Switch** ► Do-While

Question No: 7 (Marks: 1) - Please choose one

When '+' operator is used with string operands, it _____ both strings.

► **Adds** ► Subtracts ► Concatenates ► Compares

Question No: 8 (Marks: 1) - Please choose one

_____ organization is replacing the old-style layered, tree-structured organizational model.

► Network ► Hierarchical ► Matrix ► **None of the given options**

Question No: 9 (Marks: 1) - Please choose one

Due to working at home, lack of interaction may result in _____ professional growth.

Slower Faster Higher Improved

Question No: 10 (Marks: 1) - Please choose one

Spies of one business monitoring the network traffic of their competitors' _____.

Industrial Intelligence Industrial Espionage Industrial Spying Industrial Surveillance

Question No: 11 (Marks: 1) - Please choose one

The key responsibilities of a project manager is _____.

Planning and tracking of the project Arranging of the appropriate resources Client relationship management **All of the given options**

Question No: 12 (Marks: 1) - Please choose one

Sequence of steps that is taken to solve a problem is called _____.

Algorithm Operating System Application software None of the given options

Question No: 13 (Marks: 1) - Please choose one

CELLPADDING determines the distance between the _____ of the cell and the contents of the cell Caption **Border** Alignment Empty space

Question No: 14 (Marks: 1) - Please choose one

DSS stands for:

Dual System Security Decision Support System Digital System Solver **Dynamic System Security**

Question No: 15 (Marks: 1) - Please choose one

Flow control constructs in JavaScript includes:

If-Else Loops and If -Else **Switch and If-Else** All of the given choices

Question No: 16 (Marks: 1) - Please choose one

Assignment operator in JavaScript is represented by:

= **= =** => >=

Question No: 17 (Marks: 1) - Please choose one

In a System having many parts to be designed, one should always do the _____ first

Hard part Simple part Development part Quality part

Question No: 18 (Marks: 1) - Please choose one

Which protocol is used to send email ?

FTP **SMTP** TELNET All of the given choices

Question No: 19 (Marks: 1) - Please choose one

Those Systems are “Intelligent System” that mimics some aspects of

Software deployment **Human thought** Speaking power Computing

Question No: 20 (Marks: 1) - Please choose one

```
<script> Number=new Array(5);for(var
i=1; i<=5 ; i=i+1) {
for( var k=6; k<=10;
k=k+1)
{
Number[i]= k*i;
} } </script>
```

For how many times the Nested For Loop shall execute;

20 15 25 **Shall terminate in first loop.**

Question No: 21 (Marks: 1) - Please choose one

Which of the following is a valid html tag?

► <html> ► <HTML> ► <htML> **► All of the above**

Question No: 22 (Marks: 1) - Please choose one

Which of the following memory retains its information when the power to the system is turned off?

► RAM ► **ROM** ► DIMM ► DRAM

Question No: 23 (Marks: 1) - Please choose one

The output of **document.write("2" + Math.PI) ; is_____.**

► 23.141592653589793 ► 3.146 ► 2.3141592653589793 ► **None of them**

Question No: 24 (Marks: 1) - Please choose one

Logic Bombs executes its payload when _____

► A programs
run

► A predetermined event
occurs

► DoS attack is launched

► **A file is copied from one folder to
another**

Question No: 25 (Marks: 1) - Please choose one

Which Internet Service is comparatively Slow but Inexpensive and Fast.

► **E-mail** ► Instant Messaging ► Web ► None of the given

Question No: 26 (Marks: 1) - Please choose one

Super computers consists of more than one parallel processors because

► One big processor is more expensive than parallel
processors

► **Through parallel processors problems can be solved easily**

► Small processors are easy to manufacture

► All of the
given

Introduction to Computing (Session - 2)

Question No: 1 (Marks: 1) - Please choose one

A procedure that usually, but not always, works or that gives nearly the right answer is called

► Algorithm ► Logarithm ► **Heuristic** ► Methodology

Question No: 2 (Marks: 1) - Please choose one

Which of the following is NOT an Application Software?

► Word Processor ► Web Browser ► **Windows XP** ► MS Excel

Question No: 3 (Marks: 1) - Please choose one

Operating System talks to and manages devices through

► Loader ► File Manager ► Memory Manager ► **Device Driver**

Question No: 4 (Marks: 1) - Please choose one

You can _____ from/to a website containing interactive forms.

► Only read ► Only write ► **Read and write** ► Not read and write

Question No: 5 (Marks: 1) - Please choose one

When the user needs something to be done by the computer, he/she gives instructions in the form of _____ to computer ____

► **Software, Hardware** ► Hardware, Software

► System Software, Application Software ► Graph, Monitor

Question No: 6 (Marks: 1) - Please choose one

There is a battery on the motherboard to:

► Give power to the processor ► **Save information when computer is off**

► Save information when computer is on ► Give power to the

motherboard

Question No: 7 (Marks: 1) - Please choose one

_____ is simply a fast port that lets you connect computer peripherals and consumer electronics to your computer without restart.

► Freeware ► Shareware ► **Firewire** ► Firmware

Question No: 8 (Marks: 1) - Please choose one

Which one is correct?

► <BODY></BODY> ► <body></body>

► **Both <BODY></BODY> and <body></body>** ► <BODY/>

Question No: 9 (Marks: 1) - Please choose one

The weaknesses of the computer are:

► Pattern recognition & Storage ► Speed & Innovative ideas

► **Pattern recognition & Innovative ideas** ► Speed & Storage

Question No: 10 (Marks: 1) - Please choose one

The key strengths of computers are

► Speed ► Storage ► Do not get bored ► **All of the given choices**

Question No: 11 (Marks: 1) - Please choose one

Which one is correct?

► **<HEAD> </HEAD>** ► <HEAD> <END>

► <HEAD> </END> ► <HEAD> <\HEAD>

Question No: 12 (Marks: 1) - Please choose one

Everything that JavaScript manipulates is treated as:

► **Object** ► Window ► Text ► Script

Question No: 13 (Marks: 1) - Please choose one

A process in which user's browser check the form's data is called

► Server-Side Scripting ► **Client-Side Scripting**

► Bowser Scripting ► Form Scripting

Question No: 14 (Marks: 1) - Please choose one

---------- is volatile memory

► **RAM** ► ROM ► Hard Disk ► CD ROM

Question No: 15 (Marks: 1) - Please choose one

WYSIWYG stands for

► What you say is what you get ► Where you see is where you go

► **What you see is what you get** ► When you see is when you get

Question No: 16 (Marks: 1) - Please choose one

What is/are the use/uses of Word processor?

► To write a letter ► To write Research paper or report

► To create address labels ► **All of the given**

Question No: 17 (Marks: 1) - Please choose one

_____ is the example of Shrink-wrapped software

► PIA information system ► WinZip trial pack ► Linux ► **MS Word**

Question No: 18 (Marks: 1) - Please choose one

_____ interacts directly with the computer

Hardware

► Compiler ► **Operating system** ► Application software ► Assembler

Question No: 19 (Marks: 1) - Please choose one

Which of the following symbol is used for multiple line comments in JavaScript?

► / ► **//** ► **/*** ► //*

Question No: 20 (Marks: 1) - Please choose one

Consider the following statement written in JavaScript: str = ”Hello” + ” World”

What will be the value of str ?

► **HelloWorld** ► Hello World ► Hello + World ► It will result in error

Question No: 21 (Marks: 1) - Please choose one

_____ give us the ability to manipulate data through reference instead of actual value.

► **Constants** ► **Variables** ► Data Types ► Operators

Question No: 22 (Marks: 1) - Please choose one

Bringing subsystems together to form the system is called

► **Integration** ► Merging ► Splitting ► Operation & Maintenance

Question No: 23 (Marks: 1) - Please choose one

Preliminary exploration of possible solutions, technologies, suppliers is called

► Viability ► **Feasibility** ► Specification ► Integration

Question No: 24 (Marks: 1) - Please choose one

Algorithm gives us:

► Definition of a problem ► **Sequence of steps to solve a problem**

► Proper understanding of a problem ► Solution to a problem

Question No: 25 (Marks: 1) - Please choose one

Web site is collection of related _____

► Web pages ► **Information** ► Search Engines ► None of the given choices

Question No: 26 (Marks: 1) - Please choose one

Information on World Wide Web is _____ unified.

► Physically ► **Logically** ► Really ► None of the given choices

FINAL TERM EXAMINATION Fall 2008
CS101- Introduction to Computing (Session - 2)

Question No: 1 (Marks: 1) - Please choose one

Which function returns a randomly selected floating point number between 0 and 1 ?

► floor(x) ► ceil(x) ► **random()** ► round(x)

Question No: 2 (Marks: 1) - Please choose one

Functions are also called:

► Heuristics ► Variables ► Arrays ► **Subprograms**

Question No: 3 (Marks: 1) - Please choose one

In JavaScript, each element of the array can store data of type

► A Number ► An Array ► A String variable ► **All of the given choices**

Question No: 4 (Marks: 1) - Please choose one

The weaknesses of the computer are:

► Pattern recognition & Storage ► Speed & Innovative ideas
► **Pattern recognition & Innovative ideas** ► Speed & Storage

Question No: 5 (Marks: 1) - Please choose one

Processed data is called _____.

► **Information** ► Data ► Entity ► Attribute

Question No: 6 (Marks: 1) - Please choose one

Many developers write the _____ first and then incrementally convert each line into _____.

► Real code & Pseudocode ► **Pseudocode & Real code**

► Real code & Artificial code ► **None of the given options**

Question No: 7 (Marks: 1) - Please choose one

When we buy a software package, we do not really buy it, we just by a license that allows us to use it, the _____stays with the maker.

► Agreement ► **Ownership** ► Membership ► Software

Question No: 8 (Marks: 1) - Please choose one

Name, Border, Source are the _____ of the image object.

► Event Handler ► **Properties** ► Methods ► None of the given options

Question No: 9 (Marks: 1) - Please choose one

Using smart editors they can automatically color different parts of statements in different colors e.g. HTML tags in _____ color.

► Green ► Grey ► **Blue** ► None of the given options

Question No: 10 (Marks: 1) - Please choose one

_____ is in Executive team.

► **Project Manager** ► CEO ► Team Lead ► Developer

Question No: 11 (Marks: 1) - Please choose one

Module level design and unit testing the responsibility of _____.

► Team Lead ► **Developer** ► Project Manager ► Quality Assurance Expert

Question No: 12 (Marks: 1) - Please choose one

_____ team is responsible for a project after the specification's stage till the very end.

► Executive ► Architect ► **Development** ► HR

Question No: 13 (Marks: 1) - Please choose one

_____ waits for some time and then launch a function.

► Timeout( ) ► **setTimeout( )** ► setTime( ) ► setTimeIn( )

Question No: 14 (Marks: 1) - Please choose one

Which of the following is NOT an event handler for image object?

► onAbort ► onError ► onLoad ► **onUser**

Question No: 15 (Marks: 1) - Please choose one

_____ is a field that uniquely identifies each record stored in a table.

► Composite Key ► **Primary key** ► Foreign key ► None of the given options

Question No: 16 (Marks: 1) - Please choose one

Distance learning has got a boost due to the _____.

► Easy communication ► Online interactive contents ► Flexibility

► **All of the given options**

Question No: 17 (Marks: 1) - Please choose one

By default in a web page Hyper Link for another web page is represented as _____

► Blue only ► Black and Underlined ► Blue and Bold ► **Blue and Underlined** Question No: 18 (Marks: 1) - Please choose one

To store rounded number of 8.6 in a variable called "r_number", we write _____.

► r_number=Maths.round(8.6) ► r_numbers=Maths.rounds(8.6)

► r_number=Math.rounds(8.6) ► **r_number=Math.round(8.6)**

Question No: 19 (Marks: 1) - Please choose one

Which one is the best option for designing a Medical Expert System?

► **Rule Based System** ► Genetic Algorithm ► Fuzzy Logic ► Neural Network

Question No: 20 (Marks: 1) - Please choose one

Variables allow us to manipulate data through the _____.

► Actual Value ► **Reference** ► Length ► Name

Question No: 21 (Marks: 1) - Please choose one

Which is correct?

► **onUnload** ► onUnLoad ► onUNLOAD ► All of the above

Question No: 22 (Marks: 1) - Please choose one

Capturing events and responding to them is called _____.

► Function Handling ► **Event Handling** ► Event Procedure ► All of the given option

Question No: 23 (Marks: 1) - Please choose one

_____ color should be used in background for a good presentation.

► Light ► **Dark** ► Red ► None of the given options

Question No: 24 (Marks: 1) - Please choose one

Which of the following symbol is used for multiple line comments in JavaScript?

► / ► // ► **/*** ► //*

Question No: 25 (Marks: 1) - Please choose one

In JavaScript, what will be the result of the follwoing operation 79%3

► 0 ► **1** ► 2 ► 3

Question No: 26 (Marks: 1) - Please choose one

A new cell using HTML is added in table row by

► <TC>...</TC> ► **<TR>...</TR>**

► <TD>...</TD> ► <NC>...</NC>

Question No: 27 (Marks: 1) - Please choose one

TCP stands for _____.

► Total communication protocol ► **Transmission control protocol**

► Transfer control protocol ► Transfer collection protocol

Question No: 28 (Marks: 1) - Please choose one

What is NOT a key factor while designing a website?

► Usability ► User-friendly ► Consistency ► **Complexity**

Question No: 29 (Marks: 1) - Please choose one

It represents the _____ flow chart element.

► Process ► **Input or Output** ► Decision ► Connector

Question No: 30 (Marks: 1) - Please choose one

Vacuum tubes were replaced by ___

► Punch cards ► **Transistors** ► Micro Processors ► Resistors

FINALTERM EXAMINATION Spring 2009

Final CS101- Introduction to Computing

(Session - 2)

The transistor is a solid state semiconductor device used for amplification and switching, and has __three_____ terminals.

► one ► two ► **three** ► four

Question No: 2 (Marks: 1) - Please choose one

Blue Pacific is a name of ____Super__ computer.

► Mini ► Desktop ► Micro ► **Super**

Question No: 3 (Marks: 1) - Please choose one Monte Carlo algorithm is an example of Randomized algorithm

► **Randomized algorithm** ► Greedy algorithm

► both greedy and randomized ► Heuristics

Question No: 4 (Marks: 1) - Please choose one A set of stand alone productivity applications designed to work together known as __ Productivity software suites .

► **Productivity software suites** ► Compiled software
► Secure software ► Intelligent software

Question No: 5 (Marks: 1) - Please choose one
The most used form tag is the <input> tag. - False
► True ► **False**

Question No: 6 (Marks: 1) - Please choose one What is the key feature of computer which is against human nature? Can't get bored.

► **Can't get bored**. ► Pattern recognition ► Repetition ► None

Question No: 7 (Marks: 1) - Please choose one ___ Word Processor Software __ was designed as a replacement for typewriter
► Spreadsheet Software ► **Word Processor Software**
► Presentation Software ► Database Software

Question No: 8 (Marks: 1) - Please choose one Forms can be submitted by using _____2____ different methods
► **2** ► 3 ► 4 ► 5

Question No: 9 (Marks: 1) - Please choose one To display a checkbox on the web page, we use __INPUT_ tag
► CHECKBOX ► CHECK ► **INPUT** ► INPUTBOX

Question No: 10 (Marks: 1) - Please choose one _Name __ attribute of FORM tag is used to mention a URL when the form is being submitted
► **name** ► action ► method ► submit

Question No: 11 (Marks: 1) - Please choose one You can __ _____ from/to a website containing interactive forms.

► Only read ► Only write ► **Read and write** ► Not read and write

Question No: 12 (Marks: 1) - Please choose one Using COLSPAN, number of rows of the current cell should extend itself None of the given choices

► Upward ► **Downward**

► Both Upward and Downward ► None of the given choices

Question No: 13 (Marks: 1) - Please choose one ASCII WHITE is the fastest Super computer which can perform _1.3 trillion__ calculations in one second.

► 1.3 billion ► **1.3 trillion** ► 1.3 miillion ► 1.3 thousand

Question No: 14 (Marks: 1) - Please choose one _HTML___ is a related collection of WWW files that includes a beginning file called a homepage

► **HTML** ► Website ► HTTP ► Web page

Question No: 15 (Marks: 1) - Please choose one If a computer could pass the Turing test then it would be able to: think like human beings

► **think like human beings** ► do the things faster

► win a million dollar prize► store more information

Question No: 16 (Marks: 1) - Please choose one
The key strengths of computers are - Speed

► Speed ► Storage ► Do not get bored ► **All of the given choices**

Question No: 17 (Marks: 1) - Please choose one Compared to vacuum tubes, Transistors offer: All of the given choices

► Much smaller size ► Better reliability

► Much lower cost ► **All of the given choices**

Question No: 18 (Marks: 1) - Please choose one Which of the following is NOT a component of IC? Resistors

► Transistors ► Diodes ► **Resistors** ► Vacuum tubes

Question No: 19 (Marks: 1) - Please choose one When we use <INPUT type=“password”>, what will happen? - Text will be in **** format

► Text will not be visible ► Text will be in normal format

► **Text will be in **** format** ► Text will be in #### format

Question No: 20 (Marks: 1) - Please choose one Spread
sheet is a type of _ Mathematical software _____.
► Productivity software ► Engineering software
► **Mathematical software** ► Business software

Question No: 21 (Marks: 1) - Please choose one
Word Processor is a ____ Application Software__
► System Software ► **Application Software** ► Device ► Utility

Question No: 22 (Marks: 1) - Please choose one _ Utility Program refers to the firmware code which is run by an IBM compatible PC when first powered on. ► DOS ► BIOS ► **Utility Program** ► None of these

Question No: 23 (Marks: 1) - Please choose one A computer program that facilitates the communication between the computer and a peripheral device is called____ Language Translator _____
► Operating system ► Utilities ► **Language Translator** ► Device Drives

Question No: 24 (Marks: 1) - Please choose one In JavaScript,
what will be the result of the following operation 79%3
► 0 ► 1 ► 2 ► **3**

Question No: 25 (Marks: 1) - Please choose one Which of the following
number system is used by microprocessor? Binary
► **Binary** ► Decimal ► Octal ► Hexadecimal

Question No: 26 (Marks: 1) - Please choose one
Web site is a collection of related ___
Information___
► Web pages ►**Information** ► Search Engines ► None of the given choices

vulmshelp.com

MC100401285 **MOAZ SIDDIQ**

FINALTERM EXAMINATION

Spring 2010

Question No: 27 (Marks: 2)
What is the difference between 'single-line text input field' and 'password input field' ?
ANS:-
A Password Field is good for sensitive information. The only item that is absolutely necessary is the Submit Button. It is a good idea to include a Reset Button for the convenience of the user.
A text field gathers information using a single line of text. This field is useful for short answers. The default text field is blank. If you want to specify default text, use the VALUE attribute. .

Question No: 28 (Marks: 2)
What is internet?
ANS:-
Internet is also called WAN, which means the interconnection of large number of computer networks and it consists of millions of private, public, academic, business, and government networks of local to global scope that are linked by a broad array of electronic and optical networking technologies.

Question No: 29 (Marks: 2)
In JavaScript, what is event handling? What are the two types of events?
ANS:-
Event handling means capturing an event and responding to that.
Events e.g. onMouseOver, OnClick, onLoad, Onunload, updating the clock etc. are captured by the Java script & according to the programs they are responded accordingly

Question No: 32 (Marks: 3)
Differentiate between onLoad and onUnload
ANS:-
On load event is used when the page is load in the browser while on the other side **onUnload** event works when the page closes down.

Question No: 33 (Marks: 3)
Elaborate Rester Graphics with examples.
ANS:-
Raster graphics are digital images created or captured (for example, by scanning in a photo) as a set of samples of a given space . A raster file is usually larger than a vector graphics image file. A raster file is usually difficult to modify without loss of information.
Examples of raster image file types are: BMP, TIFF, GIF, and JPEG files.

Question No: 34 (Marks: 5)

What is a Relational Database? Give the names of any three RDBMS software. (2+3)

ANS:-
Database architecture consists of three levels, external, conceptual and internal. Clearly separating the three levels was a major feature of the relational database.
NAMES:
Oracle Database software, Linux, and oracle e business database software , and Oracle OLAP.
Question No: 36 (Marks: 5)
What do you mean by the term 'Telepresence' in Computing World?
ANS:-
Telepresence
• Being there, without physically being there!
• Two remotely located people, with the help of special equipment, immersed in a simulated 3-D environment where they interact like they are sitting next to each other
• Chatting, a telephone conversation, or even a videoconference are examples, but in a degraded sense of the idea

FINALTERM EXAMINATION

Spring 2010

Question No: 27 (Marks: 2)
What is a function? Give one example.
ANS:-
Function is a reusable code (group of statement) that is executed when the function is called. It is also known as sub-program. Function is normally defined in the head section of the code.

Question No: 28 (Marks: 2)
What is an intelligent system?
ANS:-
Intelligent systems are the programs developed to perform complicated jobs that reflect human brain and thoughts. If the algorithms are too much complex or can not be solved instantly then we can use such systems. Therefore the well intelligent system not only performs well but it has the capability to rectify any errors by himself if it occurs within his domain.
The examples of intelligent systems are Robotics, Business Intelligence …etc.

Question No: 29 (Marks: 2)
What is meant by semantic error ?
ANS:-
It is an error which a developer encounters when a statement is executed but it was not intended by him (the developer). Such errors are very difficult to locate during testing. Mostly these occur during abnormal circumstances. It may be referred as the logical error.

Question No: 30 (Marks: 2)
What is best algorithm?
ANS:-
Greedy algorithm is the best algorithm as it is n algorithm that always takes the best immediate, or local solution while finding an answer.

Question No: 32 (Marks: 3)
What are the Sub categories of Artificial Intelligence? Briefly explain any two.
ANS:-
1. Robotics

These are the machines which are computer programmed and perform work which was previously done by humans. They can be found in the manufacturing industry, the military, space exploration and medical applications.
2. Expert Systems
These systems are designed to replace an expert. The medical expert system is an example of such system which can replace a Doctor/medical expert.

Question No: 33 (Marks: 3)
What are the steps of working of TCP and IP protocols in internet transmission?
ANS:-
TCP divide messages in to many packets (capsulation) and sent these messages over the internet and IP route these messages on the internet to the correct destination and upon reaching the messages on its destination the messages are encapsulated.

Question No: 34 (Marks: 5)
What is ARPANET and who developed it?
ANS:-
ARPANET stands for Advanced Research Projects. The initial purpose was to communicate with and share computer resources among mainly scientific users at the connected institutions. In the beginning it was connected four universities and enabled scientists to share resources.
It was headed by Dr. J.C.R. Licklider.

Question No: 35 (Marks: 5)
Define professional ethics and its benefits with an example?
ANS:-
Professional Ethics
• Professional ethics are a category of ethics, and here we discus the professional ethics relevant to computing
• Awareness of professional ethics is gaining importance with time as the decisionmaking process in the work place keeps on increasing in complexity
• The professional ethics provide a way of simplifying that decision making process
Let us now discuss a few situations where I will request you for your ethical opinions

Question No: 36 (Marks: 5)
Write JavaScript code for the following:
Make a function compareWithTen(value)
Compare the function argument with '10' and display a message whether the value is less than, equal to or greater than 10.

FINALTERM EXAMINATION
Spring 2010

Question No: 27 (Marks: 2)
What are application softwares? List down the names of three application softwares.
ANS:-
Definition: Application Software are that software then can interact directory with the user for performance of respective type of work.

Following are the types of Application Softwares:-

- AutoCAD and Corel Draw
- Business Software
- Productivity SW
- Games Software

Question No: 28 (Marks: 2)
Why Local variable is preferred over Global variable ?
ANS:-
Global variable has some advantage with Local variables is preferred due to the following reasons:-
When we declare any global variable in web page then in case of error and logic it's very difficult to see on which line this variable is used and what's his value if we have more than 2000 lines and all the functions in web page using that Global Variable so Global variables can make the logic of a Web page difficult to understand.
As we know we can use Global variable everywhere so Global variables also make the reuse and maintenance of your code much more complex.

Question No: 30 (Marks: 2)
What is Structured Vector Graphics ?
ANS:-
This is a plug-in that is required to view swf (flash) files in the web browser

Question No: 31 (Marks: 3)
What kind of new jobs are created because of computing? And which old professions are being eliminated?
ANS:-
Due to computing where people are getting benefits from automated systems on the other hand the people that are with KHATA system or Manual system and they don't know about computers are eliminated due to this reason and people take place of many people. We can see in the offices where before computer if there are four person required now only one person is required for example with the help of database we can store more than thousand of information and only one person is managing the whole data that is DBA. In the old system many people are writing the data in registers and then its also very difficult to find the specific record.
Now we can see companies are hiring:-
Data Entry Operators
System Engineers
Software Developer
DBA etc.

FINALTERM EXAMINATION
Spring 2010

Question No: 28 (Marks: 2)
Write names of the DoS attack's phases?
ANS:-
DoS (Denail of service): DoS attach has in total 3 phases and below they are listed:

1. Search
2. Arm
3. Attack

Question No: 32 (Marks: 3)

Briefly mention any three problems in old modes of presentation development

ANS:-

Lack of resolution
Low color configuration
No graphic animation

Question No: 34 (Marks: 5)

Why the quality of image in dithering scheme is not good?

ANS:-

In this scheme, pixels of alternating colors are used to simulate a color that is not present in the platelet
For example, red and green pixels can be alternated to give the impression of bright yellow
The quality of the displayed image is poorer

FINALTERM EXAMINATION

Spring 2010

Question No: 27 (Marks: 2)

Define the term 3D Rendering

ANS:-

The process of converting information about 3-D objects into a bit-map that can be displayed on a 2-D computer display.

Question No: 29 (Marks: 2)

Define testing with respect to programming..

ANS:-

Testing:- The tasks performed to determine the existence of defects.

Programming:- The process of telling the computer what to do.

Question No: 30 (Marks: 2)

What is a compiler? Write its one benefit over interpreter.

ANS:-

Compiler translates the program written in a HLL in one go. The translated code is then used by the uP whenever the program needs to be run. In contrast of interpreter, a compiler translates high-level instructions directly into machine Language Compiled programs generally run faster than interpreted programs.

Question No: 31 (Marks: 3)

Who is a Computing Professional?

ANS:-
Computing technology has changed our way of life like no other technology. We need to study how it has done it to highlight the mistakes and success stories of the past. We need to do it so that we can learn from them and select our future direction
Accordingly.

Question No: 33 (Marks: 3)

What is ICMP?

ANS:-
ICMP is the "Internet Control Message Protocol". ICMP packets are small packets used in local networks and on the Internet, most typically, for network troubleshooting and problem location.

Question No: 35 (Marks: 5)

Write down the advantages of Natural Language Processing.

ANS:-
It is able to read what you write, comparing it to a stored database of texts. It then corrects your errors and suggests alternatives. What advantages can this give you? Here are some:
1. You Don't Have to Worry About Careless Mistakes and Typos
2. Your Grammar and Punctuation Errors are Fixed
3. Allows You To Get More Accomplished
4. Gives You A Better Vocabulary
5. Instantly Upgrades Your Communication Skills

Question No: 36 (Marks: 5)

Draw hierarchy of the people in the small project?

FINALTERM EXAMINATION
Spring 2010

Question No: 30 (Marks: 2)
What was the obstacle to the construction of analytical engine?
ANS:-
Charles Babbage had huge difficulties raising money to fund his research. As a last resort, he designed a clever mathematical scheme along with Ada, the Countess of Lovelace. It was designed to increase their odds while gambling. They bet money on horse races to raise enough money to support their research experiments
Guess what happened at the end? The lost every penny that they had.
.

Question No: 33 (Marks: 3)
Give any three applications of computer graphics?

Question No: 34 (Marks: 5)
Mention any five applications of Artificial Intelligent System
ANS:-

1. Games
2. Image recognition
3. Medical diagnosis
4. Robots
5. Business intelligence

Question No: 36 (Marks: 5)
Explain function arguments with the help of an example?
ANS:-
A named group of statements that is put together once and then used (by reference) repeatedly on a Web page
Code becomes easier to read, understand and maintain

FINALTERM EXAMINATION
Spring 2009

Question No: 31 (Marks: 1)
What are the elements of website design? Any one
ANS:-
Navigation scheme
Layout of information
Overall look and feel

Question No: 33 (Marks: 2)
What is meant by universal access of internet services ?
ANS:-
Universal access of internet services means same functionality to every one.

Question No: 38 (Marks: 5)
Differentiate between For and While loop by writing the syntax of both loops.
ANS:-
When the exact number of iterations is known, use the 'for' loop
When the number of iterations depend upon a condition being met, use the 'while' loop
'for' loops become especially useful when used in conjunction with arrays
We'll find out about arrays today, and we'll probe their usefulness as part of 'for' loop structures

Question No: 41 (Marks: 10)
Is tabular data storage better than flat file data storage? Justify your answer.
ANS:-
1.Similar items of data form a column
2.Fields placed in a particular row – same as a flat-file *record* – are strongly interrelated
3.One can sort the table w.r.t. any column
4.That makes searching – e.g., for all the books written by a certain author – straight forward

5.Similarly, searching for the 10 cheapest/most expensive books can be easily accomplished through a sort
6.Effort required for adding a new field to all the records of a flat-file is much greater than adding a new column to the table
CONCLUSION: Tabular storage is better than flat-file storage

FINALTERM EXAMINATION
Spring 2009

Question No: 31 (Marks: 1)
In programming, what is a loop?
ANS:-
In computer science a for loop is a programming language statement which allows code to be repeatedly executed. A for loop is classified as an iteration statement.

Question No: 32 (Marks: 1)
What are the other names of function? Any one.
ANS:-
Routine , procedure , sub program

Question No: 33 (Marks: 2)
How JavaScript Arrays are heterogeneous?
ANS:-
Arrays are heterogeneous in java script because at the same time simultaneously they can hold elements of multiple data types

Question No: 34 (Marks: 2)
What is the database?
ANS:-
Data base is a collection of organized data in a proper way that computer can quickly search for any desired data item, its an easy way of allowing of manipulation of data, they are design in such a way that access to any desired data can be identified and reached quickly and easy, they are generally consist of collection of interrelated files.

Question No: 35 (Marks: 3)
Differentiate between LAN and WAN with one example of each.
ANS:-
LAN is a local area network where as wan is a wide area network
LAN can be used in a specific areas with limited computers where as wan can be used on computers shared by large distances
For example LAN can be used on pc s or an organization located in one building but wan can be used on large scales like banks all over or in any Large communication systems

Question No: 36 (Marks: 3)
What are Trojan Horses?
ANS:-
Trojan horses are a kind of cyber crime, they are v harmful to computer because they are stand alone program and the look like what they are not like any thing amusing or not harmless like games..

Question No: 38 (Marks: 5)

What are the important properties, methods and event handlers of image object?

ANS:-

The primary use of the image object is to download an image into the cache before it is needed to display , image object can be used to create different kinds of animations or to display one of several images based on the desired requirement , in java script image object can be used to display the required pre loaded image

Properties of image object is :- height , width ,hspace ,vspace , src , name border etc

Methods :none

Event handlers: on aboart , onload, onerror etc

Question No: 40 (Marks: 10)

Write a note on :

Coding guidelines

Guidelines for developing short programs.

ANS:-

Coding guidelines

- Always use semicolons to end statements
- Indent blocks of code (2 to 5 spaces)
- Identifiers
- Use the camel back scheme
- Variables: nouns
- Functions: verbs
- Comment Liberally
- Make them descriptive but concise

Guidelines for developing short programs.

- Read and understand the problem
- Do you have all the required data?
- No: Get it
- Else assume it. State it explicitly
- Do the design

Question No: 41 (Marks: 10)

write a note on each of the following:

a. Vector or Object-Oriented Graphics:

b. Bit-Mapped or Raster Graphics:

ANS:-

Vector or Object-Oriented Graphics:

In Vector or object oriented graphic everything drawn is treated as object. objects retain their identity after they are drawn. These objects can later be moved, stretched, duplicated, deleted,etc. they are resolution independent and have relatively small file size. the examples are: swf, svg, wmf, ps

brass_ibrahim: Vector graphics is the use of geometrical primitives such as points, lines, curves, and shapes or polygon(s), which are all based on mathematical equations, to represent images in computer graphics.

brass_ibrahim: The term "vector graphics" is mainly used today in the context of two-dimensional computer graphicsVirtually all modern 3D rendering is done using extensions of 2D vector graphics techniques .Virtually all modern 3D rendering is done using extensions of 2D vector graphics

techniques
Bit-Mapped or Raster Graphics:
Treats everything that is drawn as a bit-map
If an object is drawn on top of another, it is difficult to move just one of them while leaving the other untouched
Changing the resolution often requires considerable touch-up work
Relatively large file size
Examples: gif, jpg, bmp
masood.tariq: Bit-Mapped or Raster Graphics:
Treats everything that is drawn as a bit-map
If an object is drawn on top of another, it is difficult to move just one of them while leaving the other untouched
Changing the resolution often requires considerable touch-up work
Relatively large file size
Examples: gif, jpg, bmp

FINALTERM EXAMINATION
Spring 2009 Final

Question No: 27 (Marks: 1)
What BIOS stands for?
ANS:-
Binary Input Output System

Question No: 28 (Marks: 1)
List down the Analytical Engine's components name (any two)
ANS:-
Google & Netscape,
Question No: 29 (Marks: 2)
Why uploading a web page is important? Describe in 2 – 3 lines.
ANS:-
By only uploading webpage we could place our information in order the other can reach up to ready what we load, upload means make available our data or information for the world web browsers

Question No: 30 (Marks: 3)
What is the difference between microprocessors and microcontrollers? Give one example of both.
ANS:-
The microprocessor is electronic equipment which can perform several function and also processing of data and information present in a computer, while microcontroller can only perform one function for that its design
Example
Microprocessors _ Pentium 4
Microcontroller _ can be a switch in side the washing machine

Question No: 31 (Marks: 5)
Differentiate uni-Processor OS from Multi-Processor OS.
ANS:-
The Multiprocessors is when more than one processor is under operation it can be several or may

hundreds of the kind to perform one great operation or calculation, while our PC is a kind of uni-processor

Question No: 32 (Marks: 5)
Why do we call JavaScript an Object-based Language?
ANS:-
Java Script is a language by which we are writing our web-pages, this language is designed to work for web pages

FINALTERM EXAMINATION
Spring 2009 Final

Question No: 31 (Marks: 1)
What is heuristic?
ANS:-
Common sense Lesson drawn from experience
(Artificial) Intelligent Systems
SW programs or SW/HW systems designed to perform complex tasks employing strategies that mimic some aspect of human thought

or

- a commonsense rule (or set of rules) intended to increase the probability of solving some problem
- of or relating to or using a general formulation that serves to guide investigation

Question No: 32 (Marks: 1)
In programming, what is an object?
ANS:-
A named collection of properties (data, state) & methods (instructions, behavior)

Question No: 33 (Marks: 2)
What is spreadsheet? List any two jobs that it can do.
ANS:-
A spreadsheet is a grid that organizes data into columns and rows. Spreadsheets make it easy to display information, and people can insert formulas to work with the data.

1. Electronic replacement for ledgers Charts
2. financial-forecasting

Question No: 35 (Marks: 3)
Explain how many ways businesses monitor their employees?
ANS:-
• Systems are available that monitor almost every key stroke that an employee makes on a computer
• Systems are available that read and censor all incoming and outgoing eMail

• It is quite straight forward to monitor where you surf, and when

Question No: 36 (Marks: 3)
What is difference between Design and System Architecture?
ANS:-
Only the higher level designs are called System Architecture and lower level designs can not be called system Architecture, and we can also say the every Architecture can be called design but every design can not be called Architecture. (For Reference Listen Lecture No.24)

Question No: 38 (Marks: 5)
How many ways are there to call a function in a program? Explain with example
ANS:-
Functions do not run automatically. When the page loads, each function waits quietly until it is told to run
Calling a Function From an Event Handler
An event handler is a command which calls a function when an event happens, such as the user clicking a button.
The command is written in the format **on*Event***, where ***Event*** is the name for a specific action. Here are some common examples:

Calling a Function From Another Function

```
function doSomething() {
  doSomethingElse();  // This line calls the next function
}
```

Question No: 39 (Marks: 5)
Elaborate the '+ ' operator and its constraints with the help of examples
The "+" String Operator
The "+" operator can be used to concatenate two strings
title = "bhola" + "continental"
The value of the variable title becomes "bholacontinental"

Question No: 40 (Marks: 10)
Write a JavaScript program having two functions sum and mean.
ANS:-
The web page will ask the user to enter five values to be added.
After taking input it will calculate the sum and mean of those values by calling sum and mean functions.

Question No: 41 (Marks: 10)
Define the following terms.

ANS:-

Object
A named collection of properties(data, state) & methods (instructions, behavior)
Event Handler
An event handler is a command which calls a function when an event happens, such as the user clicking a button
Local Variable
Declaring variables (using the var keyword) within a function, makes them local•They are available only within the function and hold no meaning outside of it
Scope of Variable
Defining the space in which a variable is effective is known as
Defining the scope of a variable. A variable can be either local or global in scope
Array
An indexed list of elements

FINALTERM EXAMINATION
Fall 2009

Question No: 32 (Marks: 1)
What does TCP/IP stand for?
ANS:-
TCP stand for Transmission Control Protocol
IP stands for Internet Protocol

Question No: 34 (Marks: 2)
What is the use of *Default* keyword in switch structure?

Question No: 36 (Marks: 3)
Where "While" loop is more preferable than "For" loop and vice versa? , explain with the help of example.

Question No: 37 (Marks: 3)
What do you mean by FTP or File Transfer Protocol?
ANS:-
This protocol is used to upload and download the files on remote computers.

Question No: 41 (Marks: 10)

Develop a web page that displays six thumbnail images. A main image should change to a larger version of the thumbnail as soon as the mouse moves over a thumbnail image. Write

complete HTML and JavaScript code.

FINALTERM EXAMINATION
Fall 2009

Question No: 32 (Marks: 1)
Name any software which can be used to make a presentation.

Question No: 38 (Marks: 5)

In which situation, we use
i- switch construct
ii- multiple If-else construct

Question No: 39 (Marks: 5)
What are the responsibilities and profile of a Team Lead?

ANS:-
Team Lead
• **Responsibilities:**
– Planning and tracking of the project
– Detailed design
– Professional development of team members
– In case of small teams, development activities
• **Profile:**
– 5+ years of development experience
– Excellent interpersonal skills
– Good planning skills
– Good design skills

Question No: 40 (Marks: 10)
Give any five well-known design heuristics for architectural design.
ANS:-
Given many parts of a system to be designed/built, do the hard part 1st.
All the serious mistakes are made on the very first day.
Simplify, simplify, simplify! Probably the most useful heuristics for increasing reliability while decreasing cost & time-to-build.

FINALTERM EXAMINATION
Fall 2009

Question No: 31 (Marks: 1)
What does NIC stand for?
ANS:-
Network Interface Cards.

Question No: 32 (Marks: 1)
Why there is a need to use primary key in database ?
ANS:-
Primary Key is a field that uniquely identifies each record stored in a table.

Question No: 37 (Marks: 3)
Write JavaScript code to convert the number 236.2363611111556 into currency format and JavaScript statement to show output.

Question No: 39 (Marks: 5)
Write a short note on:
a. Good programming methodology?
b. Correct program
ANS:-
Good programming methodology
A methodology that enables the lowest-cost and on-schedule development of programs that are correct, easy to maintain & enhance.
Correct program
A program with correct syntax & semantics.

FINALTERM EXAMINATION
Fall 2009

Question No: 32 (Marks: 1)
What kind of information can be stored in a database?
ANS:-
It can store numbers, Booleans, sound, video, images etc.

Question No: 33 (Marks: 2)
Define the key weakness of the web?
ANS:-
Initially web was designed only for humans to read not for computers to understand it.

Question No: 34 (Marks: 2)
How many iterations would this 'for' loop run for?

```
for ( x = 50 ; x < 0 ; x = x - 1 ) {
document.write ( x ) ;
}
```

Answer:
50 iterations

Question No: 35 (Marks: 3)

How can we define a Pixel?

ANS:-

It is the smallest element of image which is spread with regular array on display and each element consist of particular color.

Question No: 36 (Marks: 3)

Write JavaScript code to convert the number 236.2363611111556 into currency format and JavaScript statement to show output.

Question No: 37 (Marks: 3)

Write code in JavaScript to display the odd numbers between 20 to 100 using FOR statement.

Note: No need to write whole HTML program. Just JavaScript code of require part is require.

Question No: 38 (Marks: 5)

How marketing strategies are changed with the progress in computing? How new marketing strategies are implemented?

ANS:-

Marketing Strategy Changes with the new requirements of the modern era and the applications of the business. The web has changed marketing strategy from a mass focus to single person focus. We collected data and analyze accordingly to find out the behavior of the market and end users. In new marketing more advertising is being done through email and web and get feedback.

Question No: 39 (Marks: 5)

```
<script>

Number = new Array(5);

var abc=4;

for(var i=1; i<=5 ; i=i+1)
{
Number[i]= abc*i;

}
Number.reverse();

for(j=0;j<5;j=j+1)
{
document.write(" "+Number[j]+"<BR>");
}
</script>
```

A) What should be output of above code?

B) Explain the highlighted lines of code?

Question No: 40 (Marks: 10)
Write a brief note on each of the following.

- **FTP**
- **Telnet**
- **Instant messaging**
- **VoIP**

ANS:-

FTP: File Transfer Protocol: This protocol is used to upload and download the files on remote computers.

Telnet: FTP allows file operations only while Telnet can log on to a computer of other users through TCP/IP network and use like a local user, it help in testing of remote web server.

Instant Messaging: This is the service of messaging provided on the internet like MSN messenger, Yahoo messenger, through which we interact people randomly whenever required.

VoIP: Voice over IP, It is used to transmit the voice from one IP to another IP, In which voice is first broken down and then transmitted over a network.

Question No: 41 (Marks: 10)
What are Commonsense Guidelines to avoid viruses? Discuss about Antivirus as well.

ANS:-

Commonsense Guidelines to avoid viruses are as follows:

1. Do not open attachment of unwanted emails.
2. Don't used copied/pirated Softwares
3. Regularly place data somewhere as backup
4. Use Registered and Trusted Softwares only.
5. Install Antivirous in the system
6. Update your Windows and softwares with the passage of time.
7. Scan before using any external device with your system as USB Device.

Antivirus:
This is the software design for preventing your system from harmful effects and maintain the speed of computer. These softwares are available on the CD's and DVD's. These softwares continuously monitor the systems and aware when any harmful virus is detected and asked for the further operations. Some automatically remove the viruses from the system.

FINALTERM EXAMINATION
Fall 2009

Question No: 32 (Marks: 1)
What are Local or Function-level Variables?

ANS:-
Declaring variables (using the var keyword) within a function, makes them *local.*
They are available only within the function and hold no meaning outside of it.

Question No: 34 (Marks: 2)
What is the Data Normalization? Also define its goal.
ANS:-
Data normalization is to sort out complex data into simple form. It uses to simplify the complex information to make it more user-friendly.

Question No: 36 (Marks: 3)
Differentiate Local and Global Variables.
ANS:-
Local variables are the variables have limited scope while global have bigger scope
Local variables are not accessed by others while global is accessible to every one
Local variable used by single user while global variable can be used by different users at time from all around.

Question No: 38 (Marks: 5)
How DoS attack is a cyber crime? For what cyber crime can be used?
ANS:-
DoS stands for Decline of Service and it is a cyber crime as it jams and in some cases shut down the targeted computer by sending too much unnecessary data packets to it which ultimately exceeds the normal processing eventually results the computer or server to stuck and unable to provide services to others. It can be used to destroy the fame and diminishing of no of users requesting information and services from that particular server or computer.

FINALTERM EXAMINATION
Fall 2009

Question No: 31 (Marks: 1)
SMTP stands for what?
ANS:-
Simple Mail Transfer Protocol

Question No: 33 (Marks: 2)
In which situation we should use Inline Event Handling?
ANS:-
Event handler are placed in the BODY portion of a web page as attributes of HTML tags
The event handler attributes consist of 3 parts

a) The equal sign
b) The identifier of event handler
c) A string consisting of java script statements enclosed in double or single string

Multiple JavaScript statements can be placed in that string, but all have to fit in a single line.
No new line characters with in line event handling
Inline event handler can be used normally in a condition when we want to execute the eventd direclty

and quickly in the same line of code.

Question No: 39 (Marks: 5)
What is animated gif? How can we use it? If we animate images in JavaScript then is it better?
ANS:-
It is bit mape image format introduced in 1987by compuserve.It support up to 8 bits per pixel.It also support animation And allow a separate palette of 256 colors for each frame.
Uses: We can use it in web site they are suitable for sharp edged line art with limited number of colors. They are good for small animation and low resolution clips.
The size is small and on web site they can uploaded and downloaded easily

Question No: 40 (Marks: 10)
What is the problem with Relational Database and what solution you can suggest for it?
ANS:-
when we use to store object oriented data into a Relational database it need to be translated in form which is suitable for the relational database.
Again when we need to read RDBMs the Data need again back to be translated into object oriented form to read.
This two process delay associated processing and time spent in writing and maintaining the translation codes are the key disadvantage with Relational Database .
Solution:
Object oriented database
Object Relational database

The data should be divided and save in multiple table and tabular form ,so that open ,searching .sorting ,editing and saving of data can be performed quickly.
With tabular form one can sort w.r

Question No: 41 (Marks: 10)
How can we neutralize DoS attack? Can we track the attacker?
ANS:-
Denial of service attempt to make a computer resource unavailable to its Intended user . Easiest way to survive an attack is to have planned for the attack.
Good contact with ISP and some security providers and CERT are essential also having a separate emergency block of IP address for Critical servers with a separate rout can be effective.
We should use genuine operating system can also be helpful.
By using an extremely stateful packet filter that will inexpensively drop any unwanted packet serviving DoS attack Becomes much Easier.

We can also use Fierwalls .
Using Antivirus softwear
Using private net work
Using encryption
Network Sniffer
Intrusion detector By using all these techniques we can neutralize DoS Attack

Investigative process should begin immediately after the DoS Attack begins.By using IP address we can Track Attacker.

FINALTERM EXAMINATION
Fall 2009

Question No: 31 (Marks: 1)
What is bandwidth?

ANS:-

Bandwidth is a capacity of communication channel of carrying data.

Question No: 32 (Marks: 1)
What is "My Personal Agent"?

ANS:-

A computer programe that work automatically and have voice interface

Question No: 33 (Marks: 2)
For what purposes FTP is used in networks ?

ANS:-

To download or upload files / data to a remote computer

Question No: 34 (Marks: 2)
How can you define a readable program?

ANS:-

A program that is easy to read & understand also easy to maintain and enhance.

Question No: 36 (Marks: 3)
How can you define a consistent web design? Why is it needed?

ANS:-

A consistent web design is Easy understandable, not with heavy graphics, easy navigation. It is needed because most of the website views leave the site because of poor navigation and not easy to understand, text and design is not clear etc.

Question No: 38 (Marks: 5)
What are the advantages of multimedia presentations? Write any five.

ANS:-

Multimedia presentation is a great tool for effective communication:

Advantages:

1. Easy to make last minute change
2. More attractive
3. Can include animation, videos etc.
4. Better presentation easy to understandable for participants comparing to manual presentation.
5. Undo feature

Question No: 39 (Marks: 5)

Can a human doctor be replaced by an Expert System? Give reasons to support your answer.

ANS:-

Expert System is a computer system which simulates the knowledge and expertise of a human expert. Yes, a human doctor can be replaced by an Expert System. Following are the reasons to support my

1. A large database of knowledge can be added to and kept up to date, it can store more knowledge than a person.
2. The Expert System cannot FORGET or get facts wrong.
3. It survives forever. There is no loss of knowledge as there is when a doctor retires.
4. The Expert System can access specialist knowledge that a doctor may not have.

Question No: 40 (Marks: 10)
Explain the following issues of Data Management? (3+4+3)

1. Data entry
2. Data updates
3. Data security

ANS:-

DATA ENTRY:

There is new data entered every day.
New customers are added every day.
Some of the data entry requires the manual entry into computer system
New data entry needs to be entered correctly

DATA UPDATES:

Old titles must be removed regularly
Data changes every time
Prices change
Transportation / shipping cost changes
Customer personal data changes
Schemes changing, new offers
Every new entry needs to be entered correctly

DATA SECURITY:

All data in the system is very critical to its operation, the security of the customer's personal data is most important. Most of the hackers are always trying for that type of information specially Credit Card Numbers.
This problem can be managed by using proper security arrangements and mechanisms that provides access to only authorized entities. System Security can be improved through, encryption, firewalls and updated Antivirus Softwares

Question No: 41 (Marks: 10)
Write a note on the followings

a. **Image Preloading process**
b. **Animated Gifs**

IMAGE PRELOADING PROCESS:

The primary use of image preloading process is to download the image into the cache before it is actually needed to display.

PROCESS:

1. An example of the image object is shaped using the NEW keyword
2. The src property of this instance is set equal to the filename of the image to be pre-loaded
3. This step starts the down-loading of the image into the cache without actually displaying
4. When a pre-loaded image is required to be displayed, the src property of the displayed image is set to the src property of pre fetched image

ANIMATE GIFS:

We can save 16 gif images of the previous example in a single file in the form of an animated gif, and then used it in a regular <IMG> tag to display a moving image. However, JavaScript provide better control over the sequencing and the gap between the individual images.

FINALTERM EXAMINATION
Fall 2009

Question No: 31 (Marks: 1)

What is the out put of the following JavaScript code ?

```
name="Ali Akbar";

document.write(name.charAt(4)) ;
```

ANS:- A

Question No: 32 (Marks: 1)

What does WAN stand for?

ANS:-

Wide Area Network – A network in which computers are separated by great distances typically across cities or even continents.

Question No: 33 (Marks: 2)

Why hub is used in networks?

ANS:-

The network traffic controller – components of convential computer networks. Hub is used to connect the different computers in the network i.e. to the server.

Question No: 34 (Marks: 2)

What is output of the following JavaScript code ?

```
Str="Virtual University of Pakistan";

document.write(str.substring(5,str.length)) ;
```

Question No: 37 (Marks: 3)

Elaborate Vector or Object oriented graphics with atleast one example.

ANS:-

Treats everything that is drawn an object. Objects retain their identity after their drawn. These objects can later be easily moved stretched duplicated deleted etc are resolution independent relatively small size. e. g. swf, wmf,

Question No: 39 (Marks: 5)

Why should we, as computing professionals, be interested in studying the social implications of our creations?

ANS:-

This is imp. Because of keeping the track of money wise while implementation actually and see the results. This fits with the organization or no. to check there is any side effects morally or no. we have to be very careful while creation of any system., error free, data loose recovery. Etc.

Question No: 40 (Marks: 10)

Write responsibilities of the followings

Developer

Executive Team

Support Team

ANS:-

1.Developer

a) Module level design.

b) Coding

c) Unit testing

2. Executive Team

a) Responsible for the day to day operations.

b) All the decision related issues.

c) Policy making and changing etc.

e.g. In this usually CEO and CMSO involves

1. He is responsible for the day to day operation and great organizational skills.

3. Support Team

The support team is responsible for the complete operations such as arrangement for performing any kind of task from the starts to the end. Fully project handling and performing etc. In case of any maintenance they are the responsible for commencing the job and making sure to complete.

Question No: 41 (Marks: 10)

Write HTML and JavaScript code for the requirements shown in the diagram below.When ConvertoUpperCase button is pressed, the entered text is converted to upper case and result is displayed in the result text box. Similarly, when ConvertoLowerCase button is pressed, the entered text is converted to lower case and result is displayed in the result text box.

FINALTERM EXAMINATION
Fall 2009

Question No: 32 (Marks: 1)

What are the types of computer network according to the distance between nodes?

ANS:-

The types of computer network according to the distance between nodes are:

1. LAN
2. WAN

Question No: 35 (Marks: 3)

What is the difference between Internet and Intranet?

ANS:-

The Internet is an open, public space, while an intranet is designed to be a private space. An intranet may be accessible from the Internet, but as a rule it's protected by a password and accessible only to employees or other authorized users

Question No: 36 (Marks: 3)

Write down three advantages of using Functions in a program.

ANS:-

* Debugging is easier
* It is easier to understand the logic involved in the program
* Testing is easier
* Recursive call is possible
* Irrelevant details in the user point of view are hidden in functions
* Functions are helpful in generalizing the program

Question No: 39 (Marks: 5)

List any five issues of Data Management.

ANS:-

Data entry
Data updates
Data integrity
Data security
Data accessibility

Question No: 40 (Marks: 10)

How can you make your website's structure more navigable?

ANS:-

A properly planned website project makes the organization, development and the design of the website easier for the designer. Effective planning allows a website designer to produce a website more navigable and usable for the site's readers, allowing them to find the desired information. You can accomplish this by establishing and maintaining a creative focus throughout the design process and throughout the implementation.

Four steps for planning your website structure

1. Discover the correct niche for your website
2. Find correct keywords and choose the most profitable website concept for you.
3. Make your final website concept ever more profitable by analyzing and using the competition.
4. Build the optimal structure of your website that corresponds with your table of highly profitable keywords.

The correct structure will make your site easy and navigable for both your visitors and your search engine spider

Question No: 41 (Marks: 10)
Define network organization? What are important features of network organization? (4+6)
ANS:-
Network Organization :
Network organization is an interfirm organization that is characterized by organic or informal social systems. A company or group of companies that has a minimum of formal structures and relies instead on the formation and dissolution of teams to meet specific objectives..

Features of Network Organization:

1. The organizations are learning that business can be done in a more effective manner if emphasis is placed upon cooperation, shared responsibility and networking:
    - Within the organization
    - And also with their customers and suppliers
2. Changes according to the demand of the times
3. Works effectively to meet the business goals of the organization
4. Everyone has a feeling that he/she is playing a major role in the organization which eventually gives a feel of ownership and because of that employee can put his best effort to accomplish a task.

FINALTERM EXAMINATION
Fall 2009

Question No: 32 (Marks: 1)
What is an IP address ?
ANS:-
Every device connected to the public Internet is assigned a unique number known as an Internet Protocol (IP) address.
Question No: 34 (Marks: 2)
Define semantic web with respect to the present web?
ANS:-
The Semantic Web is an idea of World Wide Web inventor Tim Berners-Lee that the.Web as a whole can be made more intelligent and perhaps even intuitive about how to serve a user's needs.
Question No: 38 (Marks: 5)
What is the role of usability in the design of a website?
ANS:-
On the Web, usability is a necessary condition for survival. If a website is difficult to use, people **leave**. If the homepage fails to clearly state what a company offers and what users can do on the site, people **leave**. If users get lost on a website, they **leave**. If a website's information is hard to read or doesn't answer users' key questions, they **leave**.

Question No: 41 (Marks: 10)
Write down HTML and JavaScript code for the following requirements:
Declare an Array with the identifier SUBJECT having length 5. Assign following values to the

array elements:
MIS, Java, Algorithms, Databases, C++

Show all values in reverse order.

FINALTERM EXAMINATION
Fall 2009

Question No: 31 (Marks: 1)
What is an Array?
ANS:-
An indexed list of elements.

Question No: 34 (Marks: 2)
Which benefits a developer can achieve by following the heuristics for system architecting?
ANS:-

Question No: 36 (Marks: 3)
Define Primary key and Queries
ANS:-
Primary Key
Primary key is a field that uniquely identifies each record stored in a table.
Queries
Queries are used to view, change, and analyze data. They can be used to combine data from different table and extract the exact data that is desired.

Question No: 37 (Marks: 3)
Briefly describe Holographic Storage.
ANS:-
Holographic Storage
• Digital data stored in and read from a 3-D optical material with the help of lasers
• Depending upon the material, they could be read-only or R/W
• The data density (quantity of data stored per unit volume) will be millions of times more than anything available today
• The concept has been validated but commercial applications are at least 10 years away

Question No: 39 (Marks: 5)
What is Robotics? How Robots making our daily and industrial life easy?
ANS:-
Robotics
These are the machines which are computer programmed and perform work which was previously done by humans. They can be found in the manufacturing industry, the military, space exploration and medical applications.

FINALTERM EXAMINATION
Fall 2008

Question No: 31 (Marks: 1)
When does recursion occur?
ANS:-
The power of recursion evidently lies in the possibility of defining an infinite set of objects by a finite statement.

Question No: 34 (Marks: 2)
List down the names of two array methods available in JavaScript.
ANS:-

1. sort( ) [sorts elements in alphabetical order]
2. reverse( ) [Reverses the order of elements]

Question No: 36 (Marks: 3)
How can we include images in a web page using HTML and Java script?
ANS:-
Image in HTML
<IMG src=*URL,* alt=*text* height=*pixels* width=*pixels* align="*bottom*|*middle*|*top*">

Image in Javascript
Images in JavaScript can be manipulated in many ways using the built-in object Image.
Additional properties to HTML are hspace, vspace & lowsrc.
Example: It can be used by many handlers like, onAbort, onLoad & onError

Question No: 37 (Marks: 3)
The event handler attribute consists of three parts. Write about each of them.
ANS:-
The identifier of the event handler
The equal sign
A string statement enclosed in double or single quotes.

Question No: 38 (Marks: 5)
What is a packet in the network environment? What kind of information does it contain?
ANS:-

- Packet is data chopped up into pieces in a network environment.
- These packets contain information about which computer sent the data and where the data is going.
- If a packet runs into a problem during its trip, it can attempt to find another route. When all the packets get where they are going, the recipient computer puts them together again.

Question No: 39 (Marks: 5)
Suppose we have a big project. Draw hierarchy of the people involved in the project?
ANS:-
Please ignore small lines relating Sub Teams to subordinates due to shortage of time. ABCD etc are connected directly to Team Lead 1,2 & 3 accordingly.

Question No: 41 (Marks: 10)
How instant messaging works? Write the steps involved in this process.

ANS:-

The Instant Messaging services available allow us to maintain a list of people (contacts) that we interact with regularly. We can send instant messages to any of the contacts in our list as long as that contact is online.

Following steps are involved in IM working.

1. User commences the IM client.
2. IM client finds the IM server & logs in.
3. It launches communication info (IP address, etc) to the IM server.
4. IM server finds user's contacts & sends him/her the communication info.
5. IM server also notifies the contacts that the user is online; sends his/her communication info to them.
6. The user's & the contact's IM clients are ready to communicate directly (P2P).
7. As new contact has come online, IM server informs them about the user being online & vice versa.
8. Multiple, real-time chat are possible.
9. When the user logs-off, his/her IM client informs the IM server.
10. IM server wipes away the temporary file and informs the user's contact's about his/her 'offline' status.

MC100401285 **moaaz.pk@gmail.com** **MOAZ SIDDIQ**

CS-101 Quiz -3 File

By Vu Topper RM

Question No:1 **(Marks:1)** **Vu-Topper RM**

An alternative to translators

A. Assembler
B. Compiler
C. Interpreter
D. Mnemonics

Question No:2 **(Marks:1)** **Vu-Topper RM**

The sign of modulus is

A. /
B. \
C. %
D. -

Question No:3 **(Marks:1)** **Vu-Topper RM**

This ___ view of the database is called a database model.

A. theoretical
B. conceptual **Page 253**
C. empirical
D. logic

Question No:4 **(Marks:1)** **Vu-Topper RM**

Which of following is not a phase of SDLC?

A. Testing
B. Implementation
C. Problem identification

For More Help Contact What's app 03224021365

Vu Topper RM

Question No:5 **(Marks:1)** **Vu-Topper RM**

In modern computer applications, problems are more easily solved in the context of:

A. Parallel processing Page 209

B. Traditional context

C. Traditional processing

Question No:6 **(Marks:1)** **Vu-Topper RM**

5%2 would give

A. 0

B. 1

C. 2

D. 5

Question No:7 **(Marks:1)** **Vu-Topper RM**

Design phase is followed by ___

A. Requirement analysis Page 218

B. Implementation

C. Testing

D. Maintenances

Question No:8 **(Marks:1)** **Vu-Topper RM**

In particular the chart that indicates the entire game is overseen by a function named ___

A. objects

B. Control game Page 224

C. function

D. forms

Question No:9 **(Marks:1)** **Vu-Topper RM**

The simplest form of array is the ___ array.

One-dimensional

Vu Topper RM

For More Help Contact What's app 03224021365

Question No:10 **(Marks:1)** **Vu-Topper RM**

A Specific example is the…series of standards,which address numerous industrial activities such as design, production, installation and servicing

A. ISO 900

B. SQA

Question No:11 **(Marks:1)** **Vu-Topper RM**

A paradigm works on object called

A. Imperative paradigm

B. Declarative paradigm

C. Functional paradigm

D. Object-oriented paradigm

Question No:12 **(Marks:1)** **Vu-Topper RM**

An object is actually a special case of the general concept of a

A. coupling

B. binding

C. cohesion

D. Components

Question No:13 **(Marks:1)** **Vu-Topper RM**

A significant example of iterative techniques is:

A. Relational process

B. Conventional process

C. Rational unified process

D. Unified process

Question No:14 **(Marks:1)** **Vu-Topper RM**

If the result after comparison of two variables in relational operator is False, then if statement returns value

A. No

B. !

C. 0

For More Help Contact What's app 03224021365

Question No:15 **(Marks:1)** **Vu-Topper RM**

The description of the object's properties is called

A. Object

B. Class

Question No:16 **(Marks:1)** **Vu-Topper RM**

A model which represents the shift away from strict adherence from the waterfall model is:

A. Incremental model

B. Waterfall model

C. Spiral model

D. Iterative model Page 222

Question No:17 **(Marks:1)** **Vu-Topper RM**

is based on real time factory concept

Factory Pattern

Question No:18 **(Marks:1)** **Vu-Topper RM**

Which of the following data type will be used for a variable having string of symbols and alphabets.

Character

Question No:19 **(Marks:1)** **Vu-Topper RM**

Which of the following language is related to functional paradigm.

LISP

Question No:20 **(Marks:1)** **Vu-Topper RM**

SLDC =

SOFTWARE DEVELOPMENT LIFE CYCLE

Question No:21 **(Marks:1)** **Vu-Topper RM**

Software engineering IS AN engineering discipline that is concerned

All aspects of software production

For More Help Contact What's app 03224021365

Vu Topper RM

Question No:22 **(Marks:1)** **Vu-Topper RM**
An object is actually a special case of the more general concept of a
Component

Question No:23 **(Marks:1)** **Vu-Topper RM**
The major steps in the traditional software development life cycle are
Requirements

Question No:24 **(Marks:1)** **Vu-Topper RM**
which refers to tests that do not rely on knowledge of the software's interior composition.
black-box testing,

Question No:25 **(Marks:1)** **Vu-Topper RM**
How many choices are possible when using a single lf-else statement?
2

Question No:26 **(Marks:1)** **Vu-Topper RM**
refer to functional paradigm
Mathematicians

Question No:27 **(Marks:1)** **Vu-Topper RM**
While and software license agreements provide legal avenues to inhibit outright copying and unauthorized use of software.
Copyrights

Question No:28 **(Marks:1)** **Vu-Topper RM**
which occurs when a module passes control of execution to another, as in a function call
Control coupling,

Question No:29 **(Marks:1)** **Vu-Topper RM**
The Select Operation extracts from a relation.

For More Help Contact What's app 03224021365

Vu Topper RM

Rows

Question No:30 **(Marks:1)** **Vu-Topper RM**
The PROJECT operation extracts from a relation.
Columns

Question No:31 **(Marks:1)** **Vu-Topper RM**
A program DOCTOR developed by Joseph Weizenbaum in the mid-1960s named as:
ELIZA

Question No:32 **(Marks:1)** **Vu-Topper RM**
_____is the field of engineering that deals with designing system's interfaces by considering the humans physical abilities.
Ergonomics

Question No:33 **(Marks:1)** **Vu-Topper RM**
In context of health, computer science have impacts:
Both positive & negative

Question No:34 **(Marks:1)** **Vu-Topper RM**
Usual way of protecting software is:
Copyright

Question No:35 **(Marks:1)** **Vu-Topper RM**
American throws away pieces of paper each year which is equal to:
1 Billion Trees

Question No:36 **(Marks:1)** **Vu-Topper RM**
Which of the following is a robot used in medical field :
Belgain robot

Question No:37 **(Marks:1)** **Vu-Topper RM**
Robots identifies veins by:
Image processing

Vu Topper RM

For More Help Contact What's app 03224021365

Question No:38 **(Marks:1)** **Vu-Topper RM**
Act that ranges government restrictions on wire taps to include transmissions of data is:
ECPA
Question No:39 **(Marks:1)** **Vu-Topper RM**
Act that mandates about financial institutions dealing with the private information of individuals.
Gramm-Leach-Bliley

Question No:40 **(Marks:1)** **Vu-Topper RM**
What will be the output of the following statement?
int a = 3.5 + 4.4;
7.9

Question No:41 **(Marks:1)** **Vu-Topper RM**
Second phase of the development phase of the software development life cycle is:
Coding
Testing
Requirement

Question No:42 **(Marks:1)** **Vu-Topper RM**
The set of instructions in a computer language, to get the desired result is known as:
A program

Question No:43 **(Marks:1)** **Vu-Topper RM**
Page group includes options: cover
Page

Question No:44 **(Marks:1)** **Vu-Topper RM**
A mark or any other distinctive sign associated with products is called:
Trademark

Question No:45 **(Marks:1)** **Vu-Topper RM**

Vu Topper RM

For More Help Contact What's app 03224021365

We can customize indentation with:
Ruler

Question No:46 **(Marks:1)** **Vu-Topper RM**
Retailers manage record of their costumers:
Purchases

Question No:47 **(Marks:1)** **Vu-Topper RM**
Social sites includes:
Twitter

Question No:48 **(Marks:1)** **Vu-Topper RM**
Computer science has made hacking bank account:
Possible

Question No:49 **(Marks:1)** **Vu-Topper RM**
Attacks that can be made to prevent access to web sites:
DDOS

Question No:50 **(Marks:1)** **Vu-Topper RM**
Software licenses provide end users with the right to one or more copies of the software without
Violating copyrights

Question No:51 **(Marks:1)** **Vu-Topper RM**
Learning procedural knowledge usually involves a process:
Trial-and-error

Question No:52 **(Marks:1)** **Vu-Topper RM**
Which of the following is a robot used in medical field:
Belgian robot

Question No:53 **(Marks:1)** **Vu-Topper RM**

For More Help Contact What's app 03224021365

Vu Topper RM

Shortcut to select the whole text in a document:
Ctrl

Question No:54 **(Marks:1)** **Vu-Topper RM**
Editing group have commands:
3

Question No:55 **(Marks:1)** **Vu-Topper RM**
Matching geometric characteristics technique cannot read:
Handwritten material

Question No:56 **(Marks:1)** **Vu-Topper RM**
Content filtering is used to implement company policies related to:
Information system

Question No:57 **(Marks:1)** **Vu-Topper RM**
The location that is used to temporary store the information that has been cut from somewhere:
Clipboard

Question No:58 **(Marks:1)** **Vu-Topper RM**
Arrange Group is in which ribbon of MS Word?
Page Layout

Question No:59 **(Marks:1)** **Vu-Topper RM**
Justify option is used to give spaces to the paragraph on left and right side:
Equal

Question No:60 **(Marks:1)** **Vu-Topper RM**
Shortcut to insert a new comment in MS word is:
Shift+F2

Question No:61 **(Marks:1)** **Vu-Topper RM**

For More Help Contact What's app 03224021365

Vu Topper RM

The people present around the e-waste gain
Diseases

Question No:62 (Marks:1) Vu-Topper RM
The field of Artificial intelligence is being pursued along paths:
2

Question No:63 (Marks:1) Vu-Topper RM
People are working in sitting position and thus have more chance to develop
Obesity

Question No:64 (Marks:1) Vu-Topper RM
Privacy is the "right to be let alone" is written by:
Samuel D. Warr

Question No:65 (Marks:1) Vu-Topper RM
Information that was once buried in arcane records has become accessible
Database

Question No:66 (Marks:1) Vu-Topper RM
In the United States is the Privacy Act of 1974 whose purpose was to protect citizens from abusive use of databases:
Government

Question No:67 (Marks:1) Vu-Topper RM
want to reapply a command, you can use:
Redo

Question No:68 (Marks:1) Vu-Topper RM
Displaying text in two columns feature is in which tab of MS word:
Page layout

For More Help Contact What's app 03224021365

Question No:69 **(Marks:1)** **Vu-Topper RM**

There are many types of sensors:

All of these

Question No:70 **(Marks:1)** **Vu-Topper RM**

Matching geometric characteristics techniques of recognizing images is used in Optical imaging recognition.

Electronic Theft include:

Online scam

Question No:71 **(Marks:1)** **Vu-Topper RM**

Act that gives control over what information websites can collect from kids is:

COPPA

Question No:72 **(Marks:1)** **Vu-Topper RM**

Text files, which are in which each logical record is a single symbol encoded using ASCII or Unicode.

Sequential files

Question No:73 **(Marks:1)** **Vu-Topper RM**

Actions according to environment knowledge:

Intelligent action

Question No:74 **(Marks:1)** **Vu-Topper RM**

Ribbon has types of Commands:

Three

Question No:75 **(Marks:1)** **Vu-Topper RM**

Plagiarism is a major problem in:

Education

Question No:76 **(Marks:1)** **Vu-Topper RM**

Data comes from:

All of the above

Vu Topper RM

For More Help Contact What's app 03224021365

Question No:77 **(Marks:1)** **Vu-Topper RM**
Which of the following acts as a security guard between the Internet and your local area network:
Firewall

Question No:78 **(Marks:1)** **Vu-Topper RM**
Ctrl+y is used for:
Redo

Question No:79 **(Marks:1)** **Vu-Topper RM**
Ctrl+z is used for:
Undo

Question No:80 **(Marks:1)** **Vu-Topper RM**
Process of understanding what the characteristics of images is step:
Two

Question No:81 **(Marks:1)** **Vu-Topper RM**
Researchers are trying to develop systems that exhibits intelligent behavior in track:
Engineering

Question No:82 **(Marks:1)** **Vu-Topper RM**
The option of justify is in group:
Paragraph

Question No:83 **(Marks:1)** **Vu-Topper RM**
The option of bullets is in group:
Paragraph

Question No:84 **(Marks:1)** **Vu-Topper RM**
The option of strike through is in group:
Font

For More Help Contact What's app 03224021365

Question No:85 **(Marks:1)** **Vu-Topper RM**
Hyperlinks have by default color:
Blue

Question No:86 **(Marks:1)** **Vu-Topper RM**
Format painter is in group of:
Clipboard

Question No:87 **(Marks:1)** **Vu-Topper RM**
In Belgian Pepper Robot works in:
Hospitals

Question No:88 **(Marks:1)** **Vu-Topper RM**
Word provides you preformatted text boxes through:
Text box

Question No:89 **(Marks:1)** **Vu-Topper RM**
The amount of paper American use in a year is:
85 million tons

Question No:90 **(Marks:1)** **Vu-Topper RM**
One method that got on social media is the idea of a parent/child cell phone:
Contract

Question No:91 **(Marks:1)** **Vu-Topper RM**
Pages is an option in the ribbon:
Insert

Question No:92 **(Marks:1)** **Vu-Topper RM**
When we draw a table in MS word the table have Initial column(s):
One

Vu Topper RM

For More Help Contact What's app 03224021365

Question No:93 **(Marks:1)** **Vu-Topper RM**
A patent can last:
20 years

Question No:94 **(Marks:1)** **Vu-Topper RM**
Content filtering works by matching of characters:
Strings

Question No:95 **(Marks:1)** **Vu-Topper RM**
Procedural knowledge is learning:
"How"

Question No:96 **(Marks:1)** **Vu-Topper RM**
Declarative knowledge is learning:
"what"

Question No:97 **(Marks:1)** **Vu-Topper RM**
We can add charts in MS word from group:
Illustrations

Question No:98 **(Marks:1)** **Vu-Topper RM**
ajor component of syntactic analysis is :
Parsing

Question No:99 **(Marks:1)** **Vu-Topper RM**
Command that can immediately go to a page or any marked location within your document:
Go to

Question No:100 **(Marks:1)** **Vu-Topper RM**
The test that matches will have a chance to pass to Turing was of:
5 minutes

Question No:101 **(Marks:1)** **Vu-Topper RM**

For More Help Contact What's app 03224021365

Vu Topper RM

Each statement in a natural language can have:
Multiple meanings

Question No:102 (Marks:1) Vu-Topper RM
Shortcut key of paste is :
Ctrl+v

Question No:103 (Marks:1) Vu-Topper RM
Act that mandates about financial institutions must deal with the private information of individuals:
Gramm-Leach-Bliley Act

Question No:104 (Marks:1) Vu-Topper RM
Meaning of a statement in natural language depends on its
Context

Question No:105 (Marks:1) Vu-Topper RM
Content Risks include:
Harmful Advice

Question No:106 (Marks:1) Vu-Topper RM
Information security Risks include:
Malicious code

Question No:107 (Marks:1) Vu-Topper RM
To select shapes that are hidden or behind the text we can click:
Select objects

Question No:108 (Marks:1) Vu-Topper RM
We have paste options:
Multiple

Question No:109 (Marks:1) Vu-Topper RM

For More Help Contact What's app 03224021365

Reports can be received at home through email because of investment in:
Computer Science

Question No:110 (Marks:1) Vu-Topper RM
Font group includes options:
All of these

Question No:111 (Marks:1) Vu-Topper RM
Attacks can be made to prevent access to websites by crashing:
Servers

Question No:112 (Marks:1) Vu-Topper RM
Meaning of a statement in natural language depends on the manner in which it is:
Communicated

Question No:113 (Marks:1) Vu-Topper RM
Paragraph group have option:
Shading

Question No:114 (Marks:1) Vu-Topper RM
Arial is a famous type of:
Font family

Question No:115 (Marks:1) Vu-Topper RM
option is MS word prevent others from making changes to the selected text.
Block Authors

Question No:116 (Marks:1) Vu-Topper RM

Vu Topper RM

For More Help Contact What's app 03224021365

Sometimes when a device is continuously running it damages us by:
Radiations

Question No:117 (Marks:1) Vu-Topper RM
In some cases, the data collection process is readily apparent; in others it is
Subtle

Question No:118 (Marks:1) Vu-Topper RM
Usual way of protecting software is :
Copyright

Question No:119 (Marks:1) Vu-Topper RM
When we apply header it is shown at:
Every page of the document

Question No:120 (Marks:1) Vu-Topper RM
Programming languages are well-designed so that each statement has meaning:
Only one

Question No:121 (Marks:1) Vu-Topper RM
AI is helping to make
Robot

Question No:122 (Marks:1) Vu-Topper RM
Act that ranges government restrictions on wire taps to include transmissions of data is:
ECPA

Question No:123 (Marks:1) Vu-Topper RM

Vu Topper RM

For More Help Contact What's app 03224021365

We have to write an equation with 2 as a number and 3 as its power. Which option can be used for this purpose:
Superscript

Question No:124 (Marks:1) Vu-Topper RM
In context of environment, computer science have impacts:
Both positive & negative

Question No:125 (Marks:1) Vu-Topper RM
Shortcut key of Cut is:
Ctrl+x

Question No:126 (Marks:1) Vu-Topper RM
Turing gave a percentage of a machine that will have a chance to pass Turing test in year:
2000

Question No:127 (Marks:1) Vu-Topper RM
Paste option is a part of home ribbon group called:
Clipboard

Question No:128 (Marks:1) Vu-Topper RM
The communication between people because of computer science has:
Improved

Question No:129 (Marks:1) Vu-Topper RM
Eye for long amount of time is not meant to look:
2D

Question No:130 (Marks:1) Vu-Topper RM
Home ribbon contains groups :
All of these

Question No:131 (Marks:1) Vu-Topper RM
We can highlight a text from group:

For More Help Contact What's app 03224021365

Vu Topper RM

Font

Question No:132 **(Marks:1)** **Vu-Topper RM**
Microsoft office includes
Word

Question No:133 **(Marks:1)** **Vu-Topper RM**
MS Word is an example of:
Word processors

Question No:134 **(Marks:1)** **Vu-Topper RM**
Content filters are part of Internet:
Firewalls

Question No:135 **(Marks:1)** **Vu-Topper RM**
The default theme of MS-Word document is:
Office

Question No:136 **(Marks:1)** **Vu-Topper RM**
Table group is a part of ribbon.
Insert

Question No:137 **(Marks:1)** **Vu-Topper RM**
We can decrease indent from group:
Paragraph

Question No:138 **(Marks:1)** **Vu-Topper RM**
Insert tab can have group:
Pages

Question No:139 **(Marks:1)** **Vu-Topper RM**
If we want to end a page at a specific point and move to the next page we can use:

Vu Topper RM

For More Help Contact What's app 03224021365

Page break

Question No:140 **(Marks:1)** **Vu-Topper RM**
Access to the forbidden literature because of:
Computer

Question No:141 **(Marks:1)** **Vu-Topper RM**
Style groups in MS word can have:
Shading

Question No:142 **(Marks:1)** **Vu-Topper RM**
Gaming addiction can cause problems:
Financial

Question No:143 **(Marks:1)** **Vu-Topper RM**
Content filtering is serving for purpose of:
All of these

Question No:144 **(Marks:1)** **Vu-Topper RM**
The style group in the home ribbon is the:
Fourth group

Question No:145 **(Marks:1)** **Vu-Topper RM**
We can set line spacing from group:
Paragraph

Question No:146 **(Marks:1)** **Vu-Topper RM**
Self-driven cars are example of:
AI

Question No:147 **(Marks:1)** **Vu-Topper RM**
Legal notations to control digital ownership are: Copyrights
The fifth group in the home ribbon is the:
Editing

For More Help Contact What's app 03224021365

Vu Topper RM

Question No:148 **(Marks:1)** **Vu-Topper RM**
Find option includes:
All of these

Question No:149 **(Marks:1)** **Vu-Topper RM**
Shortcut key to select whole text in a document:
Ctrl+a

Question No:150 **(Marks:1)** **Vu-Topper RM**
The Turing test result of program DOCTOR developed by Joseph Weizenbaum was:
Passed

Question No:151 **(Marks:1)** **Vu-Topper RM**
With computer science the access to private information has:
Increased

Question No:152 **(Marks:1)** **Vu-Topper RM**
Pre written mathematical expressions or formulas are called:
Symbol

Question No:153 **(Marks:1)** **Vu-Topper RM**
The field of linguistic tends towards which direction:
Theoretical

Question No:154 **(Marks:1)** **Vu-Topper RM**
CAN-SPAM Act applies in:
US

Question No:155 **(Marks:1)** **Vu-Topper RM**
Data mining is practiced on data collections, called data warehouses.
Static

Vu Topper RM

For More Help Contact What's app 03224021365

Question No:156 **(Marks:1)** **Vu-Topper RM**
Theoretical track is a part of:
AI domain

Question No:157 **(Marks:1)** **Vu-Topper RM**
The approach leads to a simulation-oriented methodology.
Theoretical

Question No:158 **(Marks:1)** **Vu-Topper RM**
The approach leads to a performance-oriented methodology.
Engineering

Question No:159 **(Marks:1)** **Vu-Topper RM**
displays the document as it would appear if printed and is the default view.
Print Layout

Question No:160 **(Marks:1)** **Vu-Topper RM**
maximizes the Word window on the screen and removes all toolbars etc to allow easy reading.
Read Mode

Question No:161 **(Marks:1)** **Vu-Topper RM**
A is a specially formatted letter that appears at the beginning of a paragraph just like you see in newspapers or in books.
drop cap

Question No:162 **(Marks:1)** **Vu-Topper RM**
are a way to keep track of reading.
Bookmarks

Question No:163 **(Marks:1)** **Vu-Topper RM**
American throws away pieces of paper each year.

For More Help Contact What's app 03224021365

Vu Topper RM

1 billion trees

Question No:164 (Marks:1) Vu-Topper RM
A device that responds to stimuli from its environment:
Agent

Question No:165 (Marks:1) Vu-Topper RM
Ethical issues are related to:
moral principles

Question No:166 (Marks:1) Vu-Topper RM
We can increase the size of text from home ribbon group called:
Font

Question No:167 (Marks:1) Vu-Topper RM
In MS word different type of effects on the text can be applied with:
Word Art

Question No:168 (Marks:1) Vu-Topper RM
begins the paragraph with a large letter that spills down into the text:
Drop Cap

Question No:169 (Marks:1) Vu-Topper RM
Ethics and legality are essential in many industries including:
All of these

Question No:170 (Marks:1) Vu-Topper RM
Language group is in which ribbon of MS word?
Review

Question No:171 (Marks:1) Vu-Topper RM

Vu Topper RM

For More Help Contact What's app 03224021365

A rapidly expanding subject that is closely associated with database technology is , which consists of techniques for discovering patterns in collections of data.

Data mining

Question No:172 (Marks:1) Vu-Topper RM

A charity organization of London is:

PI

Question No:173 (Marks:1) Vu-Topper RM

footer is printed in the:

Bottom margin

Question No:174 (Marks:1) Vu-Topper RM

Change case control is an example of :

Drop-down menu

Question No:175 (Marks:1) Vu-Topper RM

Turing test was proposed in

1950

Question No:176 (Marks:1) Vu-Topper RM

Most famous word processor is :

word processor

Question No:177 (Marks:1) Vu-Topper RM

Americans use about 680 pounds of paper per year:

Per person

Question No:178 (Marks:1) Vu-Topper RM

Which of the following is social issue:

All of these

Question No:179 (Marks:1) Vu-Topper RM

Information technology has overarching standardization in place.

For More Help Contact What's app 03224021365

Vu Topper RM

No

Question No:180 **(Marks:1)** **Vu-Topper RM**
We can encrypt:
Emails

Question No:181 **(Marks:1)** **Vu-Topper RM**
A style option includes font:
All of these

Question No:182 **(Marks:1)** **Vu-Topper RM**
Quick Access Toolbar by default includes:
All of these

Question No:183 **(Marks:1)** **Vu-Topper RM**
USA has passed legislation allowing the government to actively monitor citizens in the name of:
National security

Question No:184 **(Marks:1)** **Vu-Topper RM**
Requiring certain degree of uniformity of the style, size and orientation of symbols is a(n):
Disadvantage

Question No:185 **(Marks:1)** **Vu-Topper RM**
IPR stands for:
Intellectual property rights

Question No:186 **(Marks:1)** **Vu-Topper RM**

Vu Topper RM

For More Help Contact What's app 03224021365

is a technique that provides similar access without such overhead. As in the case of an indexed system, hashing allows a record to be located by means of a key value

Hashing

Question No:187 (Marks:1) Vu-Topper RM

A file's is normally stored as a separate file on the same mass storage device as the .

Index, indexed file

Question No:188 (Marks:1) Vu-Topper RM

The data storage space is divided into several sections, called , each of which is capable of holding several records.

Buckets

Question No:189 (Marks:1) Vu-Topper RM

Conversion from key values to bucket numbers is called a:

Hash function

Question No:190 (Marks:1) Vu-Topper RM

If we want to link two sections of a same documents we generally use:

Hyperlink

Question No:191 (Marks:1) Vu-Topper RM

refers to identifying characteristics of the image.

Image processing

Question No:192 (Marks:1) Vu-Topper RM

Page setup Group is in which ribbon of MS word?

Page Layout

Question No:193 (Marks:1) Vu-Topper RM

For More Help Contact What's app 03224021365

Robots identifies veins by:
Image processing

Question No:194 (Marks:1) Vu-Topper RM
The simplest response is a , which is merely a predetermined response to the input data.
Reflex action

Question No:195 (Marks:1) Vu-Topper RM
Image analysis is also known as:
region finding

Question No:196 (Marks:1) Vu-Topper RM
refers to the task of identifying documents that relate to the topic at hand.
Information retrieval

Question No:197 (Marks:1) Vu-Topper RM
Refers to distributed systems that are more loosely coupled than clusters but that still work together to accomplish large tasks.

A. Quantum computing
B. Parallel computing
C. Grid computing
D. Clod computing

Question No:198 (Marks:1) Vu-Topper RM
Which data compression technique is suitable for situation where the long sequence has same value?

A. Differential encoding
B. Relative encoding
C. Run length encoding

For More Help Contact What's app 03224021365

Vu Topper RM

D. Frequency dependent encoding

Question No:199 (Marks:1) Vu-Topper RM

The binary search algorithm uses_____.

A. Linear search
B. Divide and conquer method
C. Bubble sort technique
D. Quick sort technique

Question No:200 (Marks:1) Vu-Topper RM

It is same as the addition in decimal system, you need to align the radix point and perform the addition as we did in s, simple:

A. Hexadecimal
B. Octal
C. Folic
D. Binary or Decimal system

Question No:201 (Marks:1) Vu-Topper RM

Within a transfer category, which instruction is used to communicating with devices outside the CPU?

A. STORE instruction
B. COM instruction
C. I/O instruction
D. LOAD instruction

Question No:202 (Marks:1) Vu-Topper RM

Computer science approaches some problems by establishing a well-defined set of building blocks from which algorithm representations can be constructed. These building blocks are____

A. Primitive
B. Non-Primitive
C. Scalar
D. Non-Scalar

For More Help Contact What's app 03224021365

Vu Topper RM

Question No:203 **(Marks:1)** **Vu-Topper RM**

A clear flag state indicates that the resource is

A. Available
B. Unavailable
C. Currently allocated
D. Ready

Question No:204 **(Marks:1)** **Vu-Topper RM**

VoIP consists of two processes on different machines transferring audio data via the model.

A. P2S
B. P2P
C. P2Q
D. P2R

Question No:205 **(Marks:1)** **Vu-Topper RM**

<a> is called the____ tag in the HTML document.

A. Actor
B. Anchor
C. Action
D. Alter

Question No:206 **(Marks:1)** **Vu-Topper RM**

Loop structure referred to as a post-test loop.

A. While
B. Repeat
C. For
D. For Each

Question No:207 **(Marks:1)** **Vu-Topper RM**

Loop, is executed in a repetitive fashion under the direction of some.

For More Help Contact What's app 03224021365

Vu Topper RM

A. Control Process
B. Sequence process
C. Halting process
D. Under some background knowledge

Question No:208 **(Marks:1)** **Vu-Topper RM**
SSDs stands for____.
A. Semantic state disk
B. Solid state disk
C. Software state disk
D. Simple state disk

Question No:209 **(Marks:1)** **Vu-Topper RM**
Repeated erasing slowly ____ the silicon dioxide chambers.
A. Damages
B. Enhance
C. Increase
D. Decrease

Question No:210 **(Marks:1)** **Vu-Topper RM**
Leibniz's machines were achieved by observing the ___ positions.
A. Third gear
B. First gear
C. Final gear
D. Second gear

Question No:211 **(Marks:1)** **Vu-Topper RM**
If a client wants to execute some scripts at the server end and server starts executing the script blindly, this may cause:
A. Security concerns on both side server and the client side
B. Ethical concerns on the server side and security concern on the client side.
C. Ethical concerns on the client side and security concerns on the server side.
D. Ethical concerns on both server and the client side

Vu Topper RM

For More Help Contact What's app 03224021365

Question No:212 **(Marks:1)** **Vu-Topper RM**

The repetitive use of an instruction or sequence of instructions is an important algorithmic concept. One method of implementing such repetition is the iterative structure known as

A. if else
B. loop
C. Class

Question No:213 **(Marks:1)** **Vu-Topper RM**

Bit patterns must move between the CPU and the main memory, between the CPU and each controller and between each controller and.

A. ROM
B. Main Memory
C. Processor
D. Cheche memory

Question No:214 **(Marks:1)** **Vu-Topper RM**

Phase 1 of problem-solving steps is ____

A. Formulate the algorithm and represent it as a program
B. Evaluate the program for accuracy and for its potential as a tool for solving other problems
C. Understand the Problem
D. Get an idea of how an algorithmic function might solve the problem

Question No:215 **(Marks:1)** **Vu-Topper RM**

What is the full form of PHP?

A. Personal Home page
B. Private Home page
C. Protected Home Page
D. Public Home page

Question No:216 **(Marks:1)** **Vu-Topper RM**

For More Help Contact What's app 03224021365

Scheduler maintains a block of information of all processes in main memory in ____ table.

A. Mac
B. IP
C. Process
D. ASCII

Question No:217 (Marks:1) Vu-Topper RM

TIFF is abbreviation of ___

A. Toggle Image File Format
B. Template Image File Format
C. Tagged Image File Frame
D. Tagged Image File Format

Question No:218 (Marks:1) Vu-Topper RM

Cconnects computer over a large geographical area or world.

A. PAN
B. LAN
C. WAN
D. MAN

Question No:219 (Marks:1) Vu-Topper RM

Which of the following is the correct sequence of network layers of the flow of message at the sender side?

A. Link layer to network layer to transport layer to application layer
B. Network layer to layer link to transport layer to application layer
C. Application layer to link layer to network layer to transport layer.
D. Application layer to transport layer to network layer to link layer

Vu Topper RM

For More Help Contact What's app 03224021365

Question No:220 **(Marks:1)** **Vu-Topper RM**

Fact-2 i=l; Fact-fact*l; i=i+l; print(fact).

A. 2

B. 3.

C. 5

D. 7

Question No:221 **(Marks:1)** **Vu-Topper RM**

A CPU consists of three parts

A. ALU/ , CONTROL unit register

B. ALU / MJPEJ / CU

C. CIRCUIT / MP3 ICU

D. RAM / cache / D-RAM

Question No:222 **(Marks:1)** **Vu-Topper RM**

One is that a CPU should be designed to execute a minimal set of machine instructions. This approach is called a ____

A. CISC

B. RISC

C. ENVIAC

D. RISC / CISC

Question No:223 **(Marks:1)** **Vu-Topper RM**

Each sound have a ___

A. Pixel

B. Geometric Structures

C. Wave

D. Scaling

Question No:224 **(Marks:1)** **Vu-Topper RM**

Which of the following language is used for client-side scripting?

A. Python

B. Java Script

For More Help Contact What's app 03224021365

Vu Topper RM

C. PHP
D. ASP.net

Question No:225 (Marks:1) Vu-Topper RM

Most codes use today are Huffman codes.

A. Relative encoding
B. Frequency Dependent
C. Run-length encoding
D. Differential encoding

Which one is a unary operator?
OR
AND
NOT
EQUAL

In _____ paradigm, task of programmer is to develop a precise problem statement rather than designing an algorithm for solving the problem.

Imperative

Functional

Declarative

Object-Oriented

_____ are the sophisticated software packages that are primerly designed for the software engineering environment.

IDE

If the result after comparison of two variables in relational operators is False, then if statement returns value

0

For More Help Contact What's app 03224021365

Vu Topper RM

1

2

3

We use _____ to reduce unnecessary dependencies or effects on other modules.

Inheritance

Abstraction

Polymorphism

Information hiding

The syntax for using && is

Cmd1 && cmd 2

Which one is not a valid data type?

HTML

Control structure which iterates a set of instructions based on the provided condition, is called a _____.

Loop

Class

Function

Conditional

A _____ is a storage area that contains such an encoded address.

Vu Topper RM

For More Help Contact What's app 03224021365

Tree

Array

Graph

Pointer

int sum =7; if (sum >= 20)cout<<"You win ";if (sum < 20)cout<<"You lose ";cout<<"the prize.";

You win

In Object Oriented Paradigm, each object will have its own collection of functions which is known as:

Classes

Object

Method

Element

In C++, symbolic representation for 'Equal to' relational operator is _____.

&

=

!=

= =

In Structure Chart functions are represented by_____.

Vu Topper RM

For More Help Contact What's app 03224021365

Circles

Arrows

Triangles

Rectangles

True parallel processing requires ------- CPU cores

Single

Multiple

None of these

Exact two cores

How many choices are possible when using a single if-else statement?

3

4

2

1

Vu Topper RM

For More Help Contact What's app 03224021365

CS101 Solved MCQs Final Term By Junaid

Computer science (Virtual University of Pakistan)

Studocu is not sponsored or endorsed by any college or university
Downloaded by Alishba khan (alishbu10@gmail.com)

CS101-Intruduction to Computing

NOTE: UPDATE BOOK TOPIC (109 to 234)

Solved MCQS for Final terms papers

Solved by JUNAID MALIK and Team



This document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

AL-JUNAID INSTITUTE GROUP

ALL answers are verified if found any mistake then Correct ACCORDINGLY

1. The result of ---------- step in the entire development process should be “tested” for accuracy

Each intermediate step

2. From a lay- person’s perspective, design is often equated with

How

3. The amount of paper American use in a year is:

85 million tons

4. Which of the following might be used to convert high-level language instructions into machine language?

An interpreter

5. Table group is a part of _____ ribbon:

Insert

6. Attacks can be made to prevent access to websites by crashing:

Servers

7. Which of the following statement is used for output in C++?

cout<<

8. A model which represents the shift away from strict adherence to the waterfall model is:

Iterative model

For More Visit: vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

9. A rapidly expanding subject that is closely associated with database technology is _____, which consists of techniques for discovering patterns in collections of data.

Data mining

10. In the case of highly standardized languages, compiler designers often provide features, sometimes called

Language extension

11. The system's interface should be designed for the _____.

all of above

12. Which of the following might be used to convert high-level language instructions into machine language?

An interpreter

13. True parallel processing requires ------- CPU cores

Multiple

14. Which of the following technique is used in software testing that examines the functionality of an application without peering into its internal structures or workings.

Black box testing

15. Which of the following is a robot used in medical field :

Belgian robot

16. In modern computer applications, problems are more easily solved in the context of:

For More Visit: vulmshelp.com

this document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

AL-JUNAID INSTITUTE GROUP

Technology

17. Turing gave a percentage of a machine that will have a chance to pass Turing test in year:

2000

18. In Belgian Pepper Robot works in:

Hospitals

19. Meaning of a statement in natural language depends on its:

Style

20. Shortcut to insert an end note in MS word is

Alt + Ctrl + D

21. Stakeholders can be a

Government agencies

22. Gaming addiction can cause problems:

Environmental

23. Illustration is a part of ribbon:

Insert

24. DBMS stands for_____?

Database management system

25. What will be the output of the following code?

```
int main()
{
```

For More Visit: vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

```
int x = 9;

while (x>0)

x=x-1;

cout<<x;

return 0;

}
```

0

26. In context of health, computer sciences have impacts:

Both positive & negative

27. If the result after comparison of two variables in relational operators is False, then if statement returns value.

0

28. Now if the result after comparison of two variables is True, then if statement returns value

1

29. A mnemonic system for representing programs is collectively called a numbers

Machine language

30. Second phase of the development phase of the software development life cycle is:

Bb

For More Visit: vulmshelp.com

This document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

31. Which software testing methodology is to develop a set of test data that insures that each instruction in the software is executed at least once?

White-box testing

32. Each statement in natural language can have:

AA

33. Find option includes:

All of above

34. A device that responds to stimuli from its environment:

Agent

35. Format painter is in group of:

Design

36. In particular, the chart that indicates the entire game is overseen by a function named _____

Control Game,

37. The description of the object's properties is called

Class

38. Editing group has commands:

5

39. Style groups in MS-word can have:

Functions

For More Visit: vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

40. Control structure iterates a set of instructions based on the provided condition called

Conditional

41. Information security Risks include:

Online scam

42. Each programming language tends to approach the parallel processing paradigm and have different terminology. In Ada we use term ….for this purpose.

Thread

43. The option of bullets is in group:

Paragraph

44. An analogy to the fact that the development process was allowed to flow in only one direction called

Waterfall model

45. Content filtering is used to implement company policies related to usage of:

Information system

46. 5%2 would give

1

47. Which of the following symbol is used at the end of the line to separate statements in many imperative languages?

;

48. Privacy is the "right to be let alone" is written by:

For More Visit: vulmshelp.com

this document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

Samuel D. Warren

49. "Displaying Text in Two Columns" feature is in which tab of MS Word?

Page Layout

50. ------- refers to data items that can take on only the values true or false

Boolean

51. If we want to end a page at a specific point and move to the next page we can use:

Page end

52. AI is helping to make:

Robots

53. Which of the following is the contrast of the Declarative paradigm?

Imperative paradigm

54. Which one is a unary operator?

NOT

55. Quick Access Toolbar by default includes:

All of these

56. The option of strike through is in group:

Font

For More Visit: vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

57. In modern computer applications, problems are more easily solved in the context of:

Technology

58. Equal to sign is

=

59. Actions according to environment knowledge:

Reflex action

60. To retrieve the information about an employee, we must select the _____ with the appropriate identification attribute value from the EMPLOYEE relation.

Table--- TUPLE

61. How many common forms of data mining?

Two

62. Insert tab can have group:

Pages

63. Writing programs in a machine language is a tedious task that often leads to errors that must be located and corrected

Debugging

64. We have paste options:

Multiple

65. A significant example of iterative techniques is:

Rational unified process

For More Visit: vulmshelp.com

This document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

66. A software license is a _____ between the owner and user of a software product that grants the user certain permissions to use the product without transferring ownership rights to the intellectual property.

Legal agreement

67. Page group includes options:

Cover page

68. The syntax for using && is:

Cmd1 && cmd 2

69. Smart art was introduced in MS word version

2007

70. If the result after comparison of two variables in relational operators is False, then if statement returns value

0

71. When we apply header it is shown at:

Start page of document

72. A translator which takes assembly language program as input & produce machine language code as output is known as:

Assembler

73. Theoretical track is a part of:

For More visit vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

Declarative knowledge

74. In MS-word different type of effects on the text can be applied with:

All of given

75. While _____ and software license agreements provide legal avenues to inhibit outright copying and unauthorized use of software.

Copy rights

76. Social sites includes:

Twitter

77. Correct syntax is:

If (condition) Statement a Else Statement B.

78. There we found that a register called a _____ is used to hold the address of the next instruction to be executed.

program counter

79. Software Engineering is an engineering discipline that is concerned with:

All aspects of software production

80. Microsoft office includes:

Word

81. In some cases, the data collection process is readily apparent; in others it is:

Subtle

For More Visit: vulmshelp.com

This document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

82. Access to the forbidden literature is because of:

Computer

83. _____ are ideal for storing data that will be processed in the order in which the file's entries are stored.

Sequential files

84. Change case control is an example of:

Dropdown menu

85. A program DOCTOR developed by Joseph Weizenbaum in the mid-1960s named as:

Eliza

86. Information that was once buried in arcane records has become accessible because of:

Database

87. Meaning of a statement in natural language depends on the manner in which it is:

88. Programming languages are well-designed so that each statement has _____ meaning:

Only one

89. _____ is based on real time factory concept.

Factory pattern

90. The fifth group in the home ribbon is the:

For More Visit: vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

Eliding

91. Retailers maintain record of their costumers:

Purchases

92. USA has passed legislation allowing the government to actively monitor citizens in the name of:

National security

93. Data mining is practiced on _____ data collections, called data warehouses.

static

94. The links between _____ in an object-oriented database are normally maintained by the DBMS.

Objects

95. In which of the following paradigms, a program is constructed by connecting smaller predefined program units.

Functional paradigm

```
Int i=1;
While(i<=5)
{
Cout<<i;
I=i+1;
}
```

How many times loop will execute?

For More Visit: vulmshelp.com

This document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

5

96. Paste option is a part of home ribbon group called:

Clipboard

97. Editing group have commands:

3

98. People are working in sitting position due to computer science and thus have more chance to develop:

Obesity

99. The style group in the home ribbon is the:

Fourth group

100. The sign of modulus is

%

101. _____ deals with designing systems that harmonize with the physical abilities of humans.

Ergonomics

102. The communication between people because of computer science has:

Improved

103. Content filtering works by matching _____ of characters:

Strings

104. Easy access to online health centres is because of:

Database

For More Visit: vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

105. A _____ is a collection whose entries have a hierarchical organization similar to that of an organization chart of a typical company.

Tree

106. Sophisticated packages designed primarily for the software engineering environment known as

DIES IDEs

107. The default theme of MS-Word document is:

Office

108. While _____ and software license agreements provide legal avenues to inhibit outright copying and unauthorized use of software.

Copyrights

109. The option of justify is in group:

Paragraph

110. ---------stages about developing a solution to the problem

Design

111. A _____ is a description of only that portion of the database pertinent to a particular user's needs.

Subschema

112. 1Which is Boolean operator for logical AND.

&

113. Content Risks include:

For More Visit: vulmshelp.com

this document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

AL-JUNAID INSTITUTE GROUP

Harmful Advice

114. One operation we might want to perform on a relation is to select _____ possessing certain characteristics and to place these selected _____ in a new relation.

tuple, tuple

115. In the case of highly standardized languages, compiler designers often provide features, sometimes called

Language extension

116. We can add charts in MS-word from group:

Table

117. 1Turing test was purposed in:

1950

118. 1Act that ranges government restrictions on wire taps to include transmissions of data is:

ECPA

119. Computer science helps in faster response times through:

All of given

120. In _____ software tester is aware of the interior structure of the software and uses this knowledge when designing the test.

Black-box testing

121. The field of artificial intelligence is being pursued along paths:

For More Visit: vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

3

122. 1Software licenses are:

All of these

123. Requiring certain degree of uniformity of the style, size and orientation of symbols is a(n):

CCCC

124. The term programming paradigm is a misnomer. A more realistic term would be Non-Procedural paradigms

Nontraditional paradigms

125. 1In turn the collected information is potentially available to:

All of these

126. Major component of syntactic analysis is:

DD

127. In assembly language, the instructions like MOV or ADD are called as _____

OP-Code

128. We have to write an equation with 2 as a number and 3 as its power. Which option can be used for this purpose?

BB

129. The imperative paradigm, also known as the Particular machine

Procedural paradigms

130. Third generation language attributes refer to

Particular machine

For More Visit: vulmshelp.com

This document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

131. Computer security is also known as:

Cyber-security

132. In _____ if two modules interact with the same item of data, then modifications made to one module may affect the other.

Data coupling

133. Retailers maintain record of their costumers:

Purchases

134. Each programming language tends to approach the parallel processing paradigm and have different terminology. In Ada we use term ….for this purpose.

Task

135. A specific example is the _____series of standards, which address numerous industrial activities such as design, production, installation and servicing.

ISO 9000

136. In Object Oriented Paradigm, each object will have its own collection of functions which is known as:

Classes

137. 1Pages is an option in the ribbon:

Insert

138. Learning procedural knowledge usually involves a process:

Trial-and-error

For More Visit: vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

139. A model which represents the shift away from strict adherence to the waterfall model is:

Iterative model

140. Distinction between software engineering and other engineering disciplines is the lack of quantitative techniques, called

Metrics

141. The term cohesion refers to this _____.

1ogical cohesion

142. Ethical issues are related to:

Moral principles

143. Modules come in a variety of _____.

Forms

144. _____ begins the paragraph with a large letter that spills down into the text:

Drop cap

145. Plagiarism is a major problem in:

Education

146. Shortcut key of cut is:

Ctrl+x

For More Visit: vulmshelp.com

This document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

147. Which intermodal coupling occurs when a module passes control of execution to another, as in a function call?

control coupling

148. Process of understanding what the characteristics of images means refers to:

Analysis

149. This _____ view of the database is called a database model.

Conceptual

150. If we want to end a page at a specific point and move to the next page we can use:

Page end

151. 1A file's _____ is normally stored as a separate file on the same mass storage device as the_____.

index , indexed file

152. Declarative paradigms system is design for

All of these

153. 1A _____ is a pre-developed model for solving a recurring problem in software design.

design pattern

154. The conceptual shape or arrangement of data is known as

Data structure

For More Visit: vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

155. Which of the following language is related to functional paradigm?

Python

156. This conceptual view of the database is called a _____ model.

Database

157. Electronic Theft include

Cyber bullying

158. Control structure iterates a set of instructions based on the provided condition called

Loop

159. Shortcut key of paste is:

Ctrl+v

160. Which from the following is not a relational operator?

! =

161. We can highlight a text from group:

Font

162. Reports can be received at home through email because of advancement in:

Artificial intelligence

163. CAN-SPAM Act applies in:

US

For More Visit: vulmshelp.com

This document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

164. In particular, the chart that indicates the entire game is overseen by a function named _____

Controlgame

165. A translator which takes assembly language program as input & produce machine language code as output is known as:

Assembler

166. Which of the following is social issue?

All of given

167. A rapidly expanding subject that is closely associated with database technology is _____, which consists of techniques for discovering patterns in collections of data.

Data mining

168. 1Assignment statement is

=

169. The term_____refers to a collection of data that is multidimensional in the sense that internal links between its entries make the information accessible from a variety of perspectives.

Database

170. The statement z=x+y shows

The sum of X and Y be assigned to the variable Z

171. 1The Turing test result of program DOCTOR developed by Joseph Weizenbaum was:

Ambiguous

For More Visit: vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

172. A process which is used by the software industry to design, develop and test high quality software is known as:

Software life cycle

173. 1Shortcut key to select the whole text in a document

Ctrl+a

174. In the case of the incremental model these prototypes evolve into the complete, final system, a process known as _____.

Evolutionary prototyping

175. Microsoft office includes:

Word

176. Design ribbon can have:

Page border

177. The option of strike through is in group:

Particular machine

178. The field of artificial intelligence is being pursued along paths:

2

179. Design phase is followed by……

Implementation

180. The point at which all the steps in a transaction have been recorded in the log is called the _____.

commit point

For More Visit: vulmshelp.com

This document is available free of charge on studocu

Downloaded by Alishba khan (alishbu10@gmail.com)

181. "Displaying Text in Two Columns" feature is in which tab of MS Word?

Page Layout

182. Command that can immediately go to a page or any marked location within your document:

Go to

183. Ctrl+y is used for:

Redo

For More Visit: vulmshelp.com

Downloaded by Alishba khan (alishbu10@gmail.com)

Question # 15 of 15 (Start time: 05:15:22 AM, 28 January 2023) Total Marks:

Question for marks 5.0

Select the correct option

- [ ]
- [x]
- [ ]

A ____ is a classification of only that portion of the protected features to a particular User's needs

Select the correct option

- superclients
- nonclients
- searching
- servers





Question # 13 of 15 (Start time: 06:15:23 AM, 26 January 2023) Total Marks:

Second phase of the development phase of the software development life cycle is

Select the correct option

- Design
- Requirements analysis
- Implementation
- Testing

Question # 12 of 15 (Start time: 05:14:43 AM, 28 January 2023) **Total Marks:**

Which of the following is the contrast of the declarative paradigm?

Select the correct option

- Object-oriented paradigm
- Imperative paradigm
- Functional paradigm
- Non-functional paradigm

Question # 11 of 15 (Start time: 08:34:38 AM, 28 January 2022) **Total Marks:**

```
float CGPA=3.5;
if (CGPA>=3.5)
Cout<<"Give Scholarship";
else
Cout<<"Sorry you do not qualify for the scholarship";
it will throw
```

Select the correct option

- Give Scholarship
- Sorry you do not qualify for the scholarship
- Error
- Display none

Question # 10 of 15 (Start time: 09:39:44 AM 28 January 2023) Total Marks: 1

_____ is aimed to give detail explanation about the use and features of the software.

Select the correct option

Reject Math Equations

User documentation

Quality assurance documentation

Technical documentation

System documentation

Click to Save Answer & Move to Next Question

There we found that a register called a _____ is used to read the address of the next instruction to be executed.

Select the correct option

- stack pointer
- data pointer
- linear register
- program counter



Type here to search



ENG 6:01 AM

CS101 - Introduction to Computing (Quiz No. 3) Quiz Start Time: 06:10 AM, 28 January 2023

Question # 9 of 15 (Start time: 09:13:30 AM, 28 January 2023) Total Marks: 1

What does SDLC stand for in the development environment?

Select the correct option

Reload Math Equations

- Software Design life Cycle
- System Design life cycle
- Software Development Life Cycle
- System Development Life Cycle

Question # 5 of 15 (Start time: 06:11:20 AM, 28 January 2023) **Total Marks:**

To retrieve the information about an employee we must select the _____ with the appropriate identification attribute value from the EMPLOYEE relation.

Select the correct option

- model
- attributes
- table
- tuple

Question # 9 of 15 (Start time: 08:11:50 AM 29 January 2023) Total Marks:

Which of the following is not Permission dog as which aSoftware is moved to maintenance stage

Select the correct option

- Changes done in previous modification introduce the errors
- Errors are discovered
- Repair process
- Changes in software application occurs

Question # 7 of 15 (Start time: 08:20:10 AM, 28 January 2021) **Total Marks:**

In _____ paradigm, task of programmer is to develop a precise problem statement rather than designing an algorithm for solving the problem.

Select the correct option

Reload Math Equations

- Imperative
- Declarative
- Functional
- Object-Oriented

Click to Save Answer & Move to Next Q

SUBSCRIBE

Question # 4 of 15 (Start time: 06:11:07 AM, 28 January 2020) Total Marks: 1

DBMS stands for_____?

Select the correct option

- Database relationship system
- Database management system
- Database fabrication and storage

Question # 3 of 15 (Start time: 08:10:43 AM, 28 January 2023) Total Marks: 1

The _____ _____ view of the database is called a database model.

Select the correct option

- [illegible]
- [illegible]
- [illegible]
- [illegible]

Question # 2 of 15 (Start Time: 06:10:34 AM, 28 January 2021) Total Marks:

The end of a file is marked by a special character called _____

Select the correct option

- tail
- void
- record

CS10) – Introduction to Computing (Quiz No. 3) Quiz Start Time: 06:10 AM, 28 January 2023

Question # 1 of 15 (Start time: 06:10:08 AM, 28 January 2023) Total Marks: 1

_____ gives the inventor certain rights to forbid others from selling, making, using and importing his or her invention for a limited period of time.

Select the correct option

Reload Math Equations

- Patents
- Invention/Copyright
- Patten
- Software License

Question # 15 of 15 (Start time: 08:00:49 AM, 20 January 2023) Total Marks:

The language understood by a computer without translation is known as

Select the correct option

- Assembly language
- Command Language
- Machine Language
- High Level Language

Which of the following language is related to Object Oriented Paradigm

Select the correct option

- Python
- Prolog
- LISP
- Smalltalk

Which of the following language is related to Object Oriented Paradigm

Select the correct option

- Python
- Prolog
- LISP
- Smalltalk

Question # 13 of 15 (Start time: 04:08:38 AM, 20 January 2023) Total Marks: 1

A process which is used by the software industry to design, develop and test high quality software is known as

Select the correct option

- Software
- Development Framework
- Testing process
- Software life cycle

Question # 13 of 15 (Start time: 04:06:38 AM, 20 January 2023) Total Marks: 1

A process which is used by the software industry to design, develop and test high quality software is known as

Select the correct option

- Software
- Specification of a method
- Testing process
- Software life cycle

Question # 12 of 15 (Start time: 06:05:03 AM, 29 January 2025) Total Marks: 1

Which one of the following is the motivation approach of programming process?

Select the correct option

- Declarative paradigm
- Functional paradigm
- Imperative Paradigm
- Object Oriented Paradigm

"Which one of the following is the traditional approach of programming problem?"

Select the correct option

- Declarative paradigm
- Functional paradigm
- Imperative Paradigm
- Object oriented paradigm

CS101 – Introduction to Computing (Quiz No. 3) Quiz Start Time: 05:58 AM, 28 January 2023

Question # 11 of 15 (Start time: 06:05:10 AM, 28 January 2023) Total Marks: 1

_____ are the sophisticated software packages that are primarily designed for the software engineering environment

Select the correct option

Select Math Equations

- IDEs
- SDKs
- IDEs
- ADEs

Java programming language lends to application the parallel processing paradigm and have different terminology. In Java we use the ... for this purpose

Select the correct option

- Function
- Method
- Thread
- Task

CS101 - Introduction to Computing (Quiz No. 3) Quiz Start Time: 05:58 AM, 28 January 2023

Question # 9 of 15 (Start time: 05:03:20 AM, 28 January 2023) Total Marks: 1

Control structure which iterates a set of instructions based on the provided condition is called a _____

Select the correct option

Reload Math Equations

- Function
- Class
- Loop
- Conditional statement

Question # 8 of 15 (Start time: 06:02:54 AM, 28 January 2023) Total Marks: 1

The point at which all the steps in a transaction have been recorded is called the _____.

Select the correct option

- mapping
- roll back
- aligning
- commit point

Question # 5 of 15 (Start time: 08:21:05 AM, 28 January 2023) Total Marks: 1

Which of the following data type will be used for a variable having strings or symbols and digits?

Select the correct option

- Integer
- Float
- Character
- Boolean

Question # 8 of 15 (Start time: 08:01:55 AM, 28 January 2023) Total Marks: 1

This symbol for using &&' is

Select the correct option

- cmd1 cmd2 &&
- cmd1 && cmd2
- cmd1 & cmd2&
- && cmd1 cmd2

CS101:- Introduction to Computing (Quiz No. 3) Quiz Start Time: 05:58 AM, 28 January 2023

Question # 7 of 15 (Start time: 06:02:22 AM, 28 January 2023) Total Marks: 1

Returning problems which are handled by the pre-developed module in software design is called_____

Select the correct option

Select Math Equations

- Design Pattern
- Implementation structure
- Requirement analysis
- Test Pattern

Question # 4 of 15 (Start time: 08:40:22 AM, 28 January 2023) Total Marks:

In assembly language, the instructions like MOV or ADD are available as _____

Select the correct option

- OP-Code
- Identifiers
- Operations
- Comments

Question # 3 of 15 (Start time: 05:59:25 AM, 28 January 2023) Total Marks: 1

There we found that a register called a _ _ _ _ _ is used to hold the address of the next instruction to be executed.

Select the correct option

- Printer controller
- program counter
- data pointer
- stack pointer

Click to Save Answer & Move to Next Question

Question # 2 of 15 (Start time: 05:58:50 AM, 28 January 2023) Total Marks: 1

Which phase of the development phase of the software development life cycle is

Select the correct option

- Design
- Testing
- Requirements analysis
- Implementation

Question # 13 of 15 (Start time: 05:51:41 AM, 20 January 2020) Total Marks: 1

The unit of a bit is called the___ _ _ _ _ _

Select the correct option

- Nibble
- Byte
- Bit

Question # 14 of 15 (Start time: 05:52:53 AM, 28 January 2023) Total Marks: 1

A translator which takes assembly language program as input & produces machine language code as output is known as

Select the correct option:

- Decoder
- Interpreter
- Assembler
- Compiler

Question # 1 of 15 (Start time: 09:58:12 AM, 28 January 2023) Total Marks: 1

A _____ is a description of the entire database structure that is used by the database software to maintain the database

Select the correct option

- schema
- subschema
- superschema
- relationship

Click to Save Answer & Move to Next Question



Question #13 of 15 (Start time: 05:51:41 AM, 20 January 2020)

Total Marks: 1

The unit of a bit is called the___ _ _ _ _ _

Select the correct option

- Hold
- delay
- Gill

CS101 – Introduction to Computing (Quiz No. 3) Quiz Start Time: 05:43 AM, 28 January 2023

Question # 12 of 15 (Start Time: 05:51:05 AM, 28 January 2023) Total Marks: 1

The Manufactured Product moves into Maintenance phase for _____ ___ __ _____

Select the correct option

Upload Math Equation

Kapdi pehnaye

Error removal

Design correction

Error detection

To retrieve the information about an employee, we must select the _____ with the appropriate qualification attribute value from the EMPLOYEE relation.

Select the correct option

- mother
- father
- attribute
- tuple 

Which of the following symbol is used at the end of the line to separate statements in many imperative languages

Select the correct option

-

-



-

CS101 - Introduction to Computing (Quiz No. 3) Quiz Start Time: 05:43 AM, 28 January 2023

Question # 9 of 15 (Start time: 05:48:09 AM, 28 January 2023) Total Marks: 1

In Structure Chart functions are represented by _____

Select the correct option

Related Math Equations

- Rectangles
- Circles
- Triangles
- Arrows

Question #10 of 15 (Start time: 09:49:04 AM 28 January 2023)

Total Marks:

The SELECT operation extracts _____ from a relation.

Select the correct option

rows

columns

a cell

tuples

Question # 7 of 15 (Start time: 08:47:57 AM, 28 January 2023) Total Marks: 1

Used to combine different sections into one table.

Select the correct option

JOIN

COMBINE

SELECT

PROJECT

Software Engineering is an engineering discipline that is concerned with:

Select the correct option

- All aspects of software production.
- How computer systems work.
- All aspects of computer-based systems development including hardware, software and process engineering.
- Principles and methods that underlie computers and software systems.

Question # 5 of 15 (Start time: 05:45:07 AM, 28 January 2023) Total Marks: 1

8) Which of the following paradigms, a program is constructed by connecting smaller, predefined programs to do

Select the correct option

- Imperative Paradigm
- Declarative paradigm
- Functional paradigm
- Object oriented paradigm

Question # 2 of 15 (Start time: 05:44:19 AM 28 January 2023) Total Marks: 1

A _____ is a storage area that contains such concatenated address

Select the correct option

- tree
- graph
- pointer
- array

CS101 – Introduction to Computing (Quiz No. 3) Quiz Start Time: 05:43 AM 28 January 2023

Question # 3 of 15 (Start time: 05:45:04 AM 28 January 2023) Total Marks: 1

_____ is not a phase of SDLC

Select the correct option

Reload Math Equations

- Implementation
- Requirement analysis
- Problem identification
- Testing

In the case of the incremental model these prototypes evolve into the complete final system or product known as _____

Select the correct option

- evolutionary prototyping
- rapid prototyping
- throwaway prototyping
- agile method

Q. No. 1. The amount of paper American use in a year is _____.
a) 90 million tons
b) 83 million tons
c) 85 million tons
d) 95 million tons

Q. No. 2. Information technology has _____ overarching standardizations in place.
a) Old
b) Multiple
c) No
d) Complex

Q. No. 3. In the case of _____ that are subject to heavy transaction loads, it is highly likely that a random snapshot will find the database in the middle of some transaction.
a) Large database
b) Object Oriented Programming
c) Small database
d) Web development

Q. No. 4. The set of instructions in a computer language, to get the desired results is known as _____.
a) A program
b) A pseudo Code
c) An Algorithm
d) A decision table

Q. No. 5. There we found that a register called a _____ is used to hold the address of the next instruction to be executed.
a) Timer register
b) Stack pointer
c) Data pointer
d) Program counter

Q. No. 6. In assembly language, the instructions like MOV or ADD or called as _____.
a) Identifiers
b) OP-Code
c) Operators
d) Commands

Q. No. 7. Americans use about 680 pounds of paper in a year:

HHELPINGHANDS.COM

a) Per city
b) Per person
c) Per company
d) Per newspaper

Q. No. 8. Text files, which are _____ in which each logical record is a single symbol encoded using ASCII or Unicode.
a) Index files
b) Flat files
c) Sequential files
d) Database files

Q. No. 9. A _____ is a collection whose entries have a hierarchical organization similar to that of an organization chart of a typical company.
a) Graph
b) Tree
c) Queue
d) Stack

Q. No. 10. The Turing test result of program DOCTOR developed by Joseph Weizenbaum was:
a) No result
b) Failed
c) Ambiguous
d) Passed

Q. No. 11. The simplest form of array is the _____ array.
a) One-dimensional
b) Two-dimensional
c) All of above
d) Multi-dimensional

Q. No. 12. Which of the following is the contrast of the Declarative paradigm?
a) Functional paradigm
b) Non-functional paradigm
c) Object oriented paradigm
d) Imperative paradigm

Q. No. 13. Which of the following technique is used in software testing that examines the functionality of an application without Peering into its internal structures or workings?
a) Green box testing
b) White box testing

HHELPINGHANDS.COM

c) Red box testing
d) Black box testing

Q. No. 14. Researchers are trying to develop systems that exhibits intelligent behavior in _____ track.
a) Artificial
b) Intelligent
c) Theoretical
d) Engineering

Q. No. 15. The links between _____ in an object-oriented database or normally maintained by DBMS.
a) Objects
b) Forms
c) Functions
d) Local data

Q. No. 16. The point in which all the steps in a transaction have been recorded in the log is called the _____.
a) Roll back
b) Snapshot
c) Schema
d) Commit point

Q. No. 17. _____ is aimed to give detail explanation about the use and features of the software.
a) Quality assurance documentation
b) Technical documentation
c) System documentation
d) User documentation

Q. No. 18. Which of the following is the correct syntax to initialize a 3-element integer array in C/C++?
a) int arr[3] = (1,2,3);
b) int arr(3) = {1,2,3};
c) int arr(3) = (1,2,3);
d) int arr[3] = {1,2,3};

Q. No. 19. This conceptual view of the database is called _____ model.
a) Data structure
b) Data mining
c) Data science

HHELPINGHANDS.COM

d) Database

Q. No. 20. Computer science has made hacking bank account:
a) Challenging
b) Difficult
c) Possible
d) Impossible

Q. No. 21. 5%2 would give _____.
a) 1
b) 2
c) 0
d) 5

Q. No. 22. A mark or any other distinctive sign associated with product is called _____.
a) Company monogram
b) Patent
c) Copyright
d) Trademark

Q. No. 23. If the result after the composition of two variables in relational operator is False, the if statement returns value _____.
a) !
b) 1
c) No
d) 0

Q. No. 24. _____ phase is followed by implementation phase of software life cycle.
a) Testing
b) Design
c) Debugging
d) Requirement analysis

Q. No. 25. Today, database technology, combined with _____ techniques.
a) Sentiment analysis
b) Text mining
c) Opening mining
d) Data mining

Q. No. 26. Which of the following language is related to functional paradigm?
a) Python

HHELPINGHANDS.COM

b) Smalltalk
c) LISP
d) Prolog

Q. No. 27. A track that leads to a simulation-oriented methodology:
a) Theoretical
b) Intelligent
c) Engineering
d) Proper

Q. No. 28. _____ is not a phase of SDLC.
a) Requirement analysis
b) Testing
c) Problem identification
d) Implementation

Q. No. 29. AI is helping to make _____.
a) DMBS
b) Online education
c) Robots
d) Smartphones

Q. No. 30. In the United States the Privacy Act of 1974 was to protect citizens from abusive use of databases:
a) Companies
b) Public
c) Agencies
d) Government

Q. No. 31. Computer science helps in faster response times through _____.
a) All of the given
b) Email
c) Instant messaging
d) Chat

Q. No. 32. Ethical issues are related to _____.
a) Linguistic principles
b) AI principles
c) Behavior principles
d) Moral principles

HHELPINGHANDS.COM

Q. No. 33. Robots identify veins by _____.

a) Touching veins
b) Image processing
c) Testing
d) Artificial intelligence

Q. No. 34. This _____ view of the database is called a database model.

a) Conceptual
b) Empirical
c) Theoretical
d) Logical

Q. No. 35. A rapidly expanding subject that is closely associated with database technology is _____ which consists of techniques for discovering patterns in collection of data.

a) Text mining
b) Opening mining
c) Sentiment analysis
d) Data mining

Q. No. 36. A patent can last _____.

a) 20 years
b) 50 years
c) 30 years
d) 40 years

Q. No. 37. Usual way of protecting software is _____.

a) Company monogram
b) Rules
c) Copyright
d) Patent

Q. No. 38. float CGPA = 2.5;
if (CGPA>=3.0)
cout << “Give scholarship”;
else
cout << “Sorry you do not qualify for the scholarship”;
It will show output:

a) Good
b) Given scholarship
c) Display none
d) Sorry you are not qualify for the scholarship

HHELPINGHANDS.COM

Q. No. 39. Which of the following symbol is used to represent Boolean operator for logical AND?

a) &|
b) &&
c) ||
d) !&

Q. No. 40. A process which is used by the software industry to design, develop and test high quality softwares is known as _____.

a) Software Life Cycle
b) Development Manual
c) Software
d) Testing Process

Q. No. 41. Under _____ paradigm a program is viewed as an entity that accepts inputs and process outputs.

a) Declarative
b) Functional
c) Imperative
d) Object-oriented

Q. No. 42. In context of health, computer science have impacts:

a) Positive
b) Negative
c) Dangerous
d) Both positive & negative

Q. No. 43. Recurring problems which are handled by the pre-developed module in software design is called _____.

a) Implementation structure
b) Test pattern
c) Requirement analysis
d) Design pattern

Q. No. 44. The statemen Z=X+Y shows:

a) The sum of X and Y be assigned to the variable Z
b) The X and Y be assigned to the variable Z
c) The sum of X and Z be assigned to the variable Y
d) The Y be assigned to the variable Z

HHELPINGHANDS.COM

Q. No. 45. USA has passed legislation allowing the Government to actively monitor the citizens in the name of:

a) Data ethics
b) Data security
c) National ethics
d) National security

Q. No. 46. The field of linguistics tends toward which direction?

a) Engineering
b) Business
c) Theoretical
d) AI

Q. No. 47. Process of understanding what the characteristics of images means refers to _____.

a) Image identifying
b) Image processing
c) Image understanding
d) Image analysis

Q. No. 48. _____ is the field of engineering that deals with designing system's interfaces by considering the human mental abilities.

a) Thermodynamics
b) Genetics
c) Cogenetic
d) Ergonomics

Q. No. 49. The end of a list is called the _____.

a) Bob
b) Head
c) Devan
d) Tail

Q. No. 50. True parallel processing requires _____ CPU cores.

a) Single
b) Exact two cores
c) None of these
d) Multiple

Q. No. 51.
```
int i=1;
while(i<=5)
{
```

HHELPINGHANDS.COM

```
cout << I;
I = i+1;
}
```

How many times loop will execute?

a) 4
b) 5
c) 3
d) 2

Q. No. 52. How many common forms of data mining?

a) Four
b) Five
c) Three
d) Two

Q. No. 53. In Object Oriented Paradigm, each object will have its own collection of functions which is known is _____.

a) Methods
b) Elements
c) Classes
d) Objects

Q. No. 54. A device that responds to stimuli from its environment:

a) AI device
b) Router
c) Computer
d) Agent

Q. No. 55. I n the case of the incremental model these prototypes evolve into the complete, final system, a process known as _____.

a) Agile method
b) Evolutionary prototyping
c) Rapid prototyping
d) Throwaway prototyping

Q. No. 56. Stockholders can be a _____.

a) Government agencies
b) Lawyers
c) Government policies
d) Schools

HHELPINGHANDS.COM

Q. No. 57. Which of the following language is related to Object Oriented Paradigm?
a) Smalltalk
b) Prolog
c) LISP
d) Python

Q. No. 58. Software engineering is an engineering discipline that is concerned with _____.
a) How computer systems work
b) Theories and methods that underlie computers and software systems
c) All aspects of computers-based systems development, Including hardware, software and process engineering
d) All aspects of software production

Q. No. 59. Which of the following is the traditional approach of programming process?
a) Declarative paradigm
b) Imperative paradigm
c) Object Oriented paradigm
d) Functional paradigm

Q. No. 60. Learning procedural knowledge usually involves a process:
a) Process -and-error
b) Trial-and-error
c) Procedure-and-error
d) Try-and-error

Q. No. 61. Software license provide users with the right to one or more copies of the software without _____.
a) Legislation
b) Using copyright
c) Violating copyright
d) Using license

Q. No. 62. Writing programs in a machine language is a tedious task that often leads to errors that must be located and corrected.
a) Executing
b) Compiling
c) Debugging
d) Accuracy

Q. No. 63. Data mining is practiced on _____ data collections, called data warehouses.
a) Vibrant

HHELPINGHANDS.COM

b) Dynamic
c) Forceful
d) Static

Q. No. 64. A _____ alters the execution sequence of the program.
a) Division
b) Module
c) Control statement
d) Assignment statement

Q. No. 65. The people present around the e-waste gain:
a) Diseases
b) Substances
c) Electronic waste
d) Benefits

Q. No. 66. Which one is not a valid data type?
a) float
b) HTML
c) int
d) char

Q. No. 67. Retailers maintain record of their customer's _____.
a) Purchases
b) Returns
c) Discounts
d) Belongings

Q. No. 68. Which of the following statement is used for output in C++?
a) cin<<
b) cout>>
c) cout<<
d) cin>>

Q. No. 69. IPR stands for _____.
a) Intellectual Property Release
b) Intellectual Property Restate
c) Intellectual Property Rights
d) Intellectual Property Resources

Q. No. 70. Meaning of a statement in natural language depends on its _____.

HHELPINGHANDS.COM

a) Grammar
b) Context
c) Style
d) Formatting

Q. No. 71. Eye for long amount of time is not meant to look _____.
a) 1D
b) Continuously
c) Constantly
d) 2D

Q. No. 72. Procedural knowledge is learning _____.
a) "when"
b) "slowly"
c) "how"
d) "what"

Q. No. 73. How many choices are possible when using a single if-else statement?
a) 3
b) 1
c) 2
d) 4

Q. No. 74. The beginning of a list is called the _____ of the list.
a) Tail
b) Devan
c) Bob
d) Head

Q. No. 75. What will be the output of the following statement?
int a = 10 + 4.867;
a) 14.867
b) 14
c) Compile error
d) 10

Q. No. 76. The term _____ refers to a collection of data that is multidimensional in the sense that internal links between its entries make the information accessible from a variety of perspectives.
a) Data mining
b) Data science
c) Database

HHELPINGHANDS.COM

d) Data structure

Q. No. 77. A program DOCTOR developed by Joseph Weizenbaum in the mid-1960s named as _____.

a) Eliza
b) Smart doctor
c) Joseph
d) Alexa

Q. No. 78. Major component of syntactic analysis is _____.

a) Identifying
b) Parsing
c) Context
d) Understanding syntax

Q. No. 79. Second phase of the development phase of the software development life cycle is _____.

a) Requirement analysis
b) Implementation
c) Design
d) Testing

Q. No. 80. From a lay-person perspective, design is often equated with _____.

a) Why
b) Where
c) How
d) What

Q. No. 81. Weak cohesion is also called as _____ cohesion.

a) Strong
b) Stable
c) Logical
d) Physical

Q. No. 82. _____ phase of the Software Life Cycle tends to provide solution for the problem.

a) Design
b) Testing
c) Analysis
d) Implementation

Q. No. 83. The SELECT operation extracts _____ from a relation.

HHELPINGHANDS.COM

a) Rows
b) Column
c) A cell
d) Table

Q. No. 84. In C++, symbolic representation for 'Equal to' relational operator is _____.
a) =
b) ==
c) !=
d) &

Q. No. 85. In Structure Chart functions are represented by _____.
a) Arrows
b) Rectangles
c) Circles
d) Triangles

Q. No. 86. Which phase provides a road map for the developers during project planning?
a) System analysis
b) Coding
c) Testing
d) Software design

Q. No. 87. We use _____ to reduced unnecessary dependencies or effects on other modules.
a) Information hiding
b) Polymorphism
c) Inheritance
d) Abstraction

Q. No. 88. A _____ is a storage area that contains such an encoded address.
a) Tree
b) Pointer
c) Array
d) Graph

HHELPINGHANDS.COM